




D-Link DIS-210G-12UP switch Gestionado L2/L3 Gigabit Ethernet (10/100/1000) Energía sobre Ethernet (PoE) DIN rail Negro

Marca : D-Link Código del producto: DIS-210G-12UP

Nombre del producto : DIS-210G-12UP

D-Link DIS-210G-12UP. Tipo de interruptor: Gestionado, Capa del interruptor: L2/L3. Puertos tipo básico de conmutación RJ-45 Ethernet: Gigabit Ethernet (10/100/1000), Cantidad de puertos básicos de conmutación RJ-45 Ethernet: 8. Tabla de direcciones MAC: 8000 entradas, Capacidad de conmutación: 24 Gbit/s. Estándares de red: IEEE 802.3af, IEEE 802.3at. Voltaje de entrada DC: 48 - 55 V. Energía sobre Ethernet (PoE). Factor de forma: DIN rail

Características de administración		Diseño	
Tipo de interruptor *	Gestionado	Factor de forma	DIN rail
Capa del interruptor	L2/L3	Color del producto	Negro
Calidad de servicio (QoS) soporte	✓	Indicadores LED	✓
Puertos e Interfaces		Código IP (International Protection)	IP40
Cantidad de puertos básicos de conmutación RJ-45 Ethernet *	8	Montaje en carril DIN	✓
Puertos tipo básico de conmutación RJ-45 Ethernet *	Gigabit Ethernet (10/100/1000)	Control de energía	
Cantidad de ranuras del módulo SFP	4	Fuente de energía *	CC
Conexión		Fuente de alimentación incluida *	✓
Estándares de red *	IEEE 802.3af, IEEE 802.3at	Voltaje de entrada DC	48 - 55 V
Soporte 10G *	✗	Consumo de energía (max)	251,7 W
Adición de vínculos	✓	Alimentación a través de Ethernet (PoE)	
Ethernet LAN, velocidad de transferencia de datos	10,1000,100 Mbit/s	Energía sobre Ethernet (PoE) *	✓
Soporte VLAN	✓	Compatible con tipo de PoE (Power over Ethernet, Alimentación a través de Ethernet)	PoE++ (4PPoE)
Funciones de LAN virtual	Port-based VLAN, Voice VLAN	Alimentación mediante Ethernet Plus (PoE +) Cantidad de puertos	2
Número de VLANs	4000	Número de puertos de PoE (alimentación a través de Ethernet) de 4 pares o 4PPoE (PoE++)	6
Transmisión de datos		Potencia a través de Ethernet (PoE) Presupuesto	240 W
Capacidad de conmutación *	24 Gbit/s	Condiciones ambientales	
Tasa de reenvío	17,86 Mpps	Intervalo de temperatura operativa	-40 - 75 °C
Tabla de direcciones MAC *	8000 entradas	Intervalo de humedad relativa para funcionamiento	5 - 95%
Jumbo Frames, soporte	✓	Peso y dimensiones	
Tramas Jumbo	9000	Ancho	44 mm
Seguridad		Profundidad	107 mm
Algoritmos de seguridad soportados	SNMP, SNMPv2, SNMPv3	Altura	164 mm
MAC, filtro de direcciones	✓	Peso	880 g

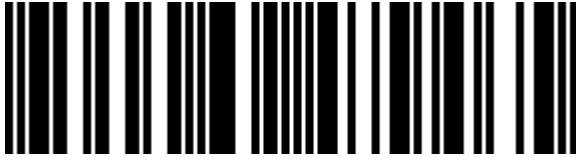

0790069479465



790069479465

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.