




D-Link DAP-2622 punto de acceso inalámbrico 1200 Mbit/s Blanco
Energía sobre Ethernet (PoE)

Marca : D-Link

Código del producto: DAP-2622

Nombre del producto : DAP-2622

D-Link DAP-2622. 2,4 GHz, 5 GHz, Rango máximo de transferencia de datos: 1200 Mbit/s. Algoritmos de seguridad soportados: 64-bit WEP, 128-bit WEP, SSH, SSID, SSL/TLS, WPA, WPA2. Ethernet LAN, velocidad de transferencia de datos: 10,100,1000 Mbit/s. Energía sobre Ethernet (PoE). Color del producto: Blanco. Consumo de energía (max): 21,5 W

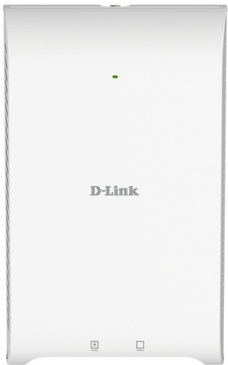

Características		Control de energía	
2,4 GHz *	✓	Energía sobre Ethernet (PoE) *	✓
5 GHz *	✓	Consumo energético	9,5 W
6 GHz *	✗	Consumo de energía (max)	21,5 W
Rango máximo de transferencia de datos *	1200 Mbit/s	Diseño	
Velocidad máxima de transferencia de datos (2,4 GHz)	300 Mbit/s	Ubicación *	Pared
Velocidad máxima de transferencia de datos (5 GHz)	867 Mbit/s	Color del producto *	Blanco
Ethernet LAN, velocidad de transferencia de datos	10,100,1000 Mbit/s	Indicadores LED	Poder, Estado
Frecuencia de banda	2.4 - 2.4835, 5.15 - 5.85 GHz	Antena	
Estándares de red	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.3ab, IEEE 802.3at, IEEE 802.3az, IEEE 802.3u	Tipo de antena *	Interno
		Cantidad de antenas	2
Tecnología de cableado	10/100/1000Base-T(X)	Aprobaciones reguladoras	
MIMO	✓	Certificación	CE, FCC
Tipo MIMO	Multi User MIMO	Peso y dimensiones	
Aislamiento inalámbrico	✓	Ancho	95 mm
Calidad de servicio (QoS) soporte	✓	Profundidad	27,4 mm
Seguridad		Altura	154,1 mm
Algoritmos de seguridad soportados *	64-bit WEP, 128-bit WEP, SSH, SSID, SSL/TLS, WPA, WPA2	Peso	212 g
MAC, filtro de direcciones	✓	Condiciones ambientales	
		Intervalo de humedad relativa para funcionamiento	10 - 90%
		Intervalo de temperatura operativa	0 - 40 °C

Seguridad		Condiciones ambientales	
Características de identificador de conjunto de servicios (SSID, Service Set Identifier)	SSID broadcast	Intervalo de temperatura de almacenaje	-20 - 65 °C
Servicio de autenticación remota de llamadas de usuarios (RADIUS)	✓	Intervalo de humedad relativa durante almacenaje	5 - 95%
Puertos e Interfaces		Datos logísticos	
Ethernet LAN (RJ-45) cantidad de puertos *	3	Código de Sistema de Armomización (SA)	85176990



0790069457814



790069457814

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.