


RoHS compliant

REV	MODIFICATION	DATE
A	ISSUE	2024.11.1

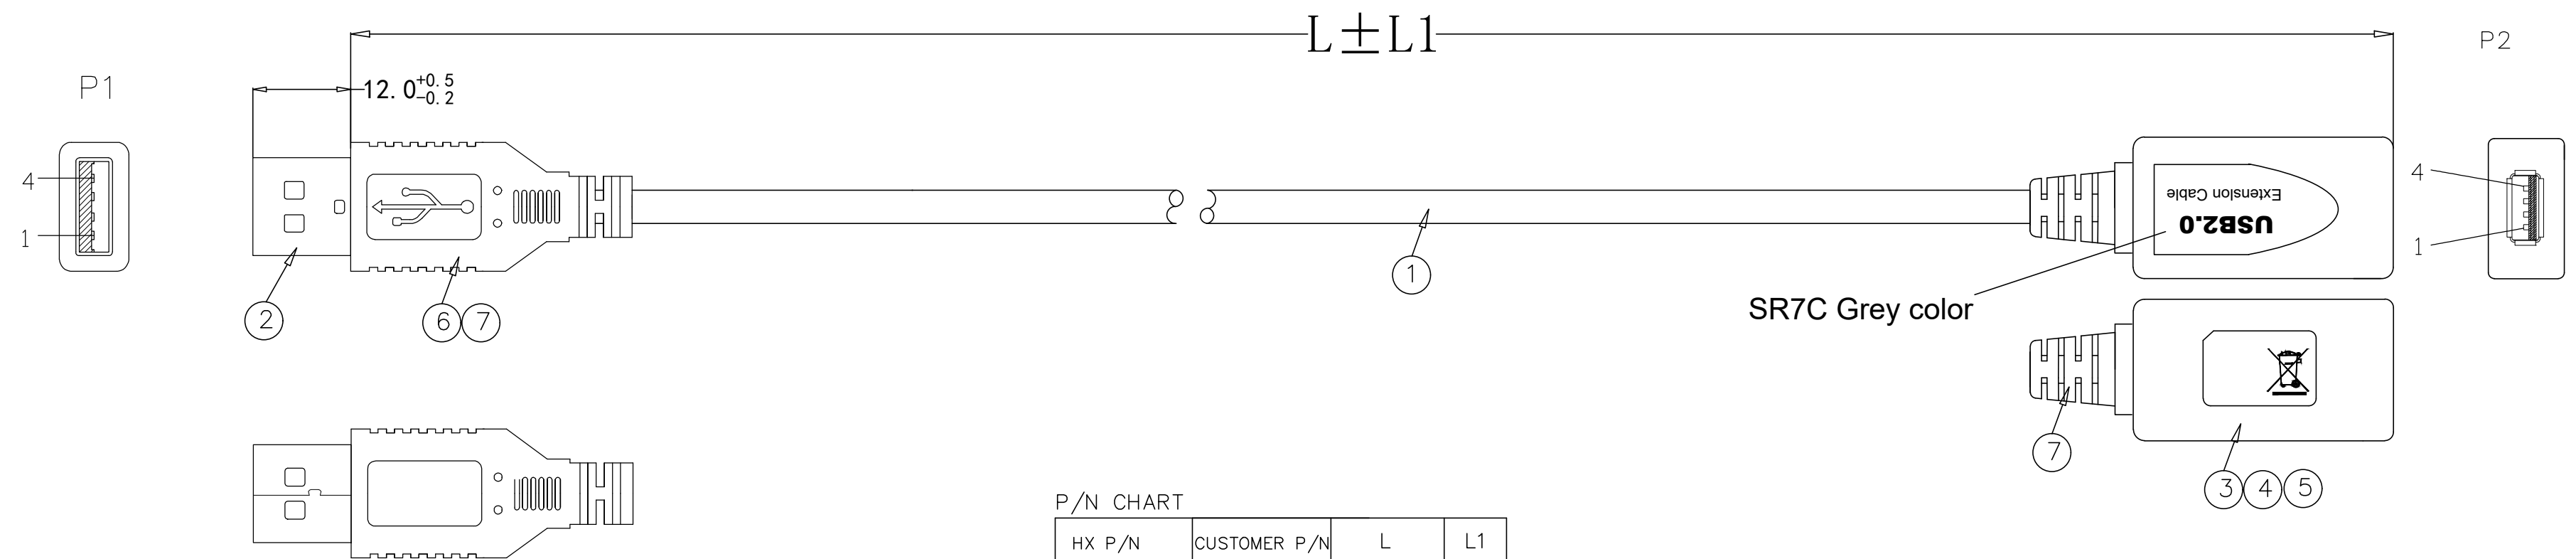



ELECTRONIC TEST:

- A.OPEN/SHORT/INTERMITTENCE: 100%.
B.HI-POT: AC 300V 0.01S
C.INSULATION RESISTANCE:DC300V 0.01S 10MΩ(MIN)
D.CONDUCTIVE RESISTANCE:10 OHM (MAX)

HX P/N	CUSTOMER P/N	L	L1
202300031	USB2. 0AAF05A	5000	70
202300032	USB2. 0AAF10A	10000	100

PIN OUT

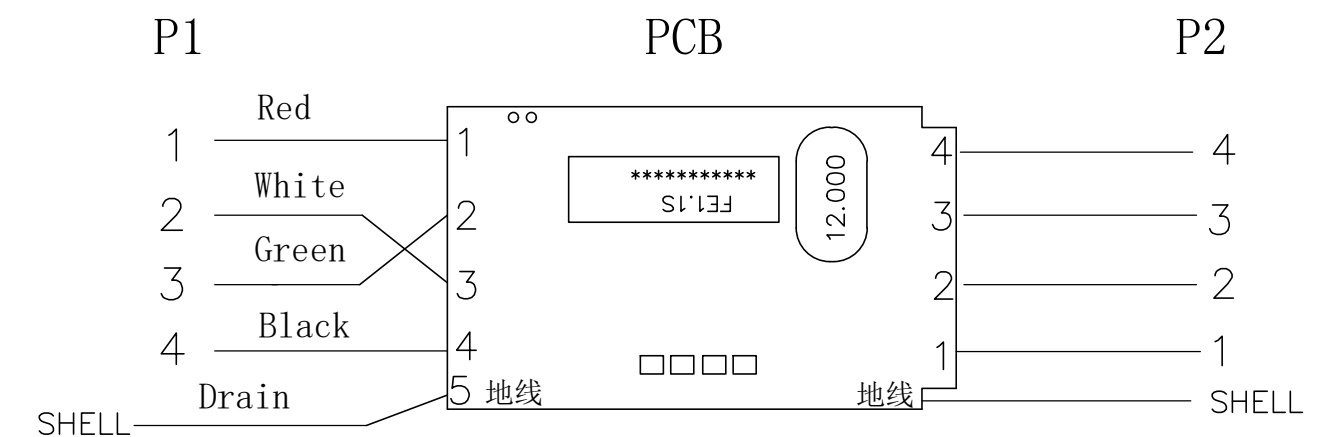

7.	MOLDED	45P BLACK PVC	16	G	SHELL		
6.	MOLDED	LD-PE	3	G	SHELL		
5.	PLASTIC SHELL	Black ABS shell	1	PCS	角 法 PROJ: 	容 忍 公 差 TOLERANCE: XX= XXX=	产 品 名 称 PROUCT NAME: USB2.0AAF**A
4.	PCB	PCB-FE1.1S	1	PCS	比 例 SCALE: NONE	版 本 REV: A	产 品 料 号 PART NO: 20031003*
3.	CONNECTOR	USB A Female PIN G/F Nickel plated	1	PCS	单 位 UNIT: MM	页 次 SHEET: 1/2	客 户 CUST:
2.	CONNECTOR	USB A Male PIN G/F Nickel plated	1	PCS	客 户 回 签 SUST APPROVED:		
1.	CABLE	UL2725 28#(7/0.127TC)*1PR+24#(7/0.2TC)*2C+AL+D(1/0.254BC)+B(64/0.12LMS) 黑 OD=4.8 印字: E***** 兄 AWM 2725 80° C 30V VW-1 28AWG/1P AND 24AWG/2C USB2.0 CABLE	L	MM	核 准 APPROVED:		
					审 核 CHECKED:		
NO	NAME	SPECIFICATIONS	Q'TY	UNIT	制 图 QIUCAIMIAO DRAWING: 2024.11.1		