



# Triade

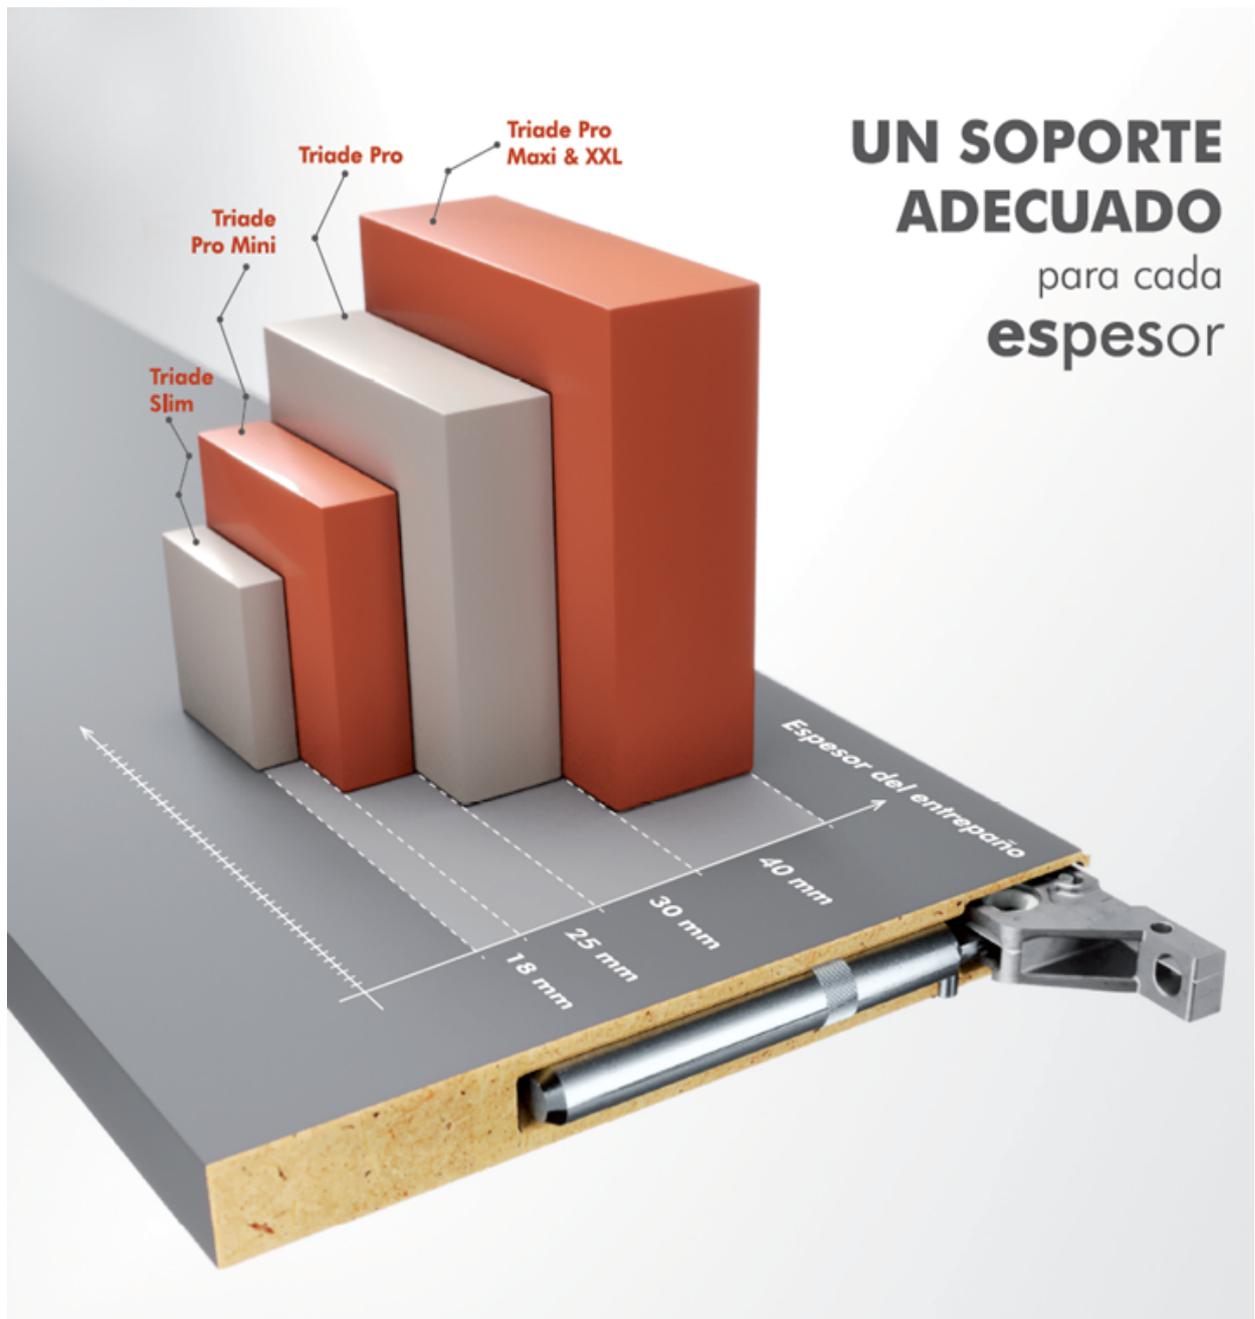

## SYMBOLS



= SHELF SAFELY LOCKED DURING TRANSPORTATION AND AT HOME.



= ANTI-TURNOVER LOCKING SYSTEM



= NORMS / PATENTS



= PHILLIPS / POZIDRIV



= WITH BUFFER



= PART NO.



= BLADE SLOT



= WITH MAGNET



= PCS. PER PACKAGE



= COMBI SLOT



= HEXAGONAL SOCKET



= NEWTON



= CAPACITY LOADING



= HEXALOBULAR SOCKET



= FRICTION



= WOOD / GLASS THICKNESS



= COUNTERSUNK HEAD



= AUTOMATIC



= HOLE DIAMETER



= PAN HEAD



= DROP DOWN



= DIAMETER



= FLANGE HEAD



= LENGTH



= FLAT HEAD



= STANDARD HINGE



= HEIGHT



= TRILOBULAR SCREW



= KIMANA HINGE



= RIGHT VERSION



= SELF-TAPPING SCREW



= FLAP HINGE



= LEFT VERSION



= EURO THREAD



= WITH SPRING



= SETTING CODE



= METRIC THREAD



= WITHOUT SPRING



= PCS. PER PAD



= PRE-INSERTED SCREW



= REVERSED SPRING



= CUT ON REQUEST



= PRE-INSERTED SCREW AND SPREADING BUSH



= WITH FLANGE



## MATERIALS

<b>ZA</b> = Zinc Alloy	<b>ST</b> = Steel	<b>HSS</b> = High Speed Steel	<b>BR</b> = Brass	<b>ABS</b> = Acrylonitrile Butadiene Styrene
<b>ZAnk</b> = Nickel-plated Zinc Alloy	<b>STzk</b> = Zinc-plated Steel	<b>AL</b> = Aluminium	<b>WD</b> = Wood	<b>EVA</b> = Ethylene Vinyl Acetate

<b>EP</b> = <b>ENGINEERING PLASTIC</b>	+ <b>EP</b> = other engineering plastic available on request	<b>SR</b> = <b>SOFT RUBBER</b>	+ <b>SR</b> = other soft rubber available on request
--	--	--------------------------------	--

<b>EPn</b> = Natural Engineering Plastic	<b>EPc</b> = Clear Engineering Plastic	<b>SRn</b> = Natural Soft Rubber
<b>EPw</b> = White Engineering Plastic	<b>EPg</b> = Grey Engineering Plastic	<b>SRw</b> = White Soft Rubber
<b>EPwg</b> = Water Green Engineering Plastic	<b>EPa</b> = Anthracite Engineering Plastic	<b>SRb</b> = Black Soft Rubber

 <b>FINISHES</b>	+  = OTHER FINISHES AVAILABLE ON REQUEST
--	---

PART NO.	FINISHES	PART NO.	FINISHES	PART NO.	FINISHES
OO	Insignificant finish	IF	Middle Grey	RO	Red
AA	Natural	IJ	Light Grey	UT	T-Met 9007
AB	White	IL	Grey 20	UZ	T-Met
AE	White 9010	IN	Grey met. 26	WA	Bronzed
EA	Black	JB	Bright Aluminium	WI	Burnished
EC	Matt Black	JC	Aluminium - Chrome	XD	Satin-finished Steel
EE	Anthracite	JD	Matt Aluminium	YA	Nickel-plated
EW	Grey 9007	JE	Satin-finished Aluminium	YB	Bright Nickel-plated
FU	Gunmetal	JF	Aluminium - Brass	YC	Matt Nickel-plated
FV	Gunmetal V52	JG	Aluminium 5	YD	Satin-finished Nickel-plated
GR	Raw	JL	Aluminium PE 11	YQ	Black Nickel
HA	Brass-Plated	JM	Aluminium RAL 9006	Z9	Black Zinc
HH	Tropicalized	KA	Chrome	ZA	Zinc alloy
HL	Raw Brass	KB	Bright Chrome	ZN	Zinc-plated
HX	Graphite	KC	Matt Chrome	ZQ	Bright Gold
IA	Grey	LD	Brown 8019	ZY	Titanium
IB	Metallic Grey	NN	Metallic Beige	ZZ	Clear

## TRIADE SLIM



18 mm min.

15 kg per pair for shelf 200 mm deep


PAT. PENDING

### SPECIFICATION




It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

### ADJUSTMENT

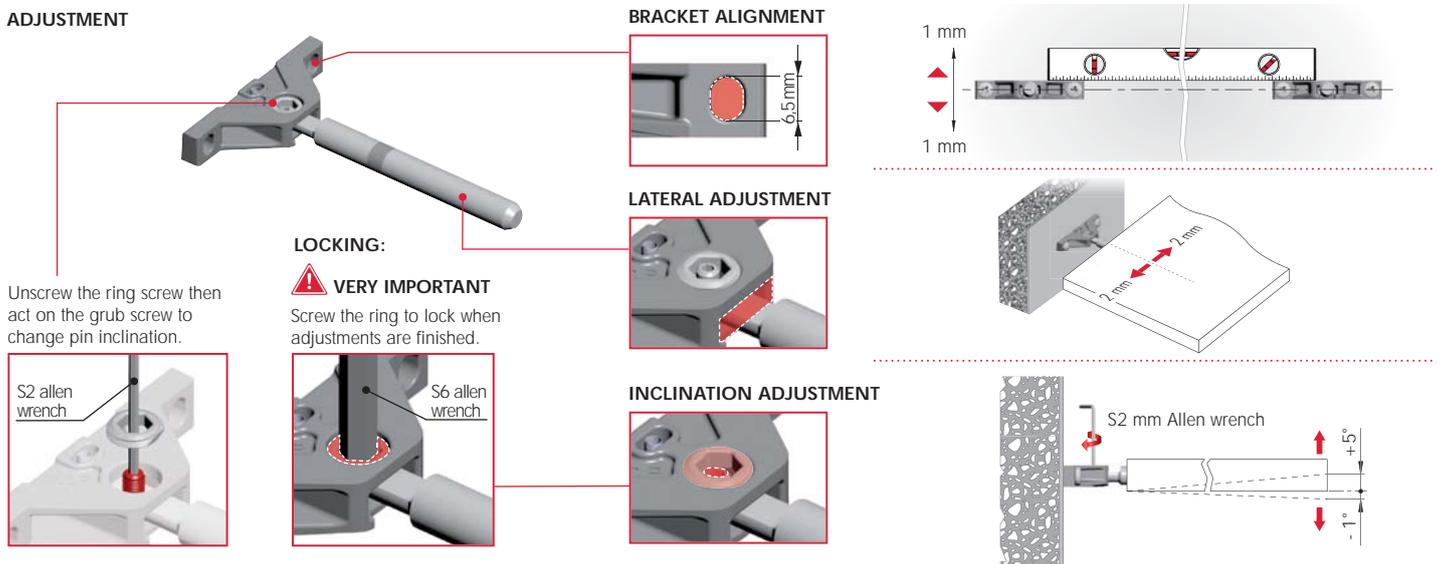



### CAPACITY LOADING CHART

(The figures refer to 2 shelf supports)

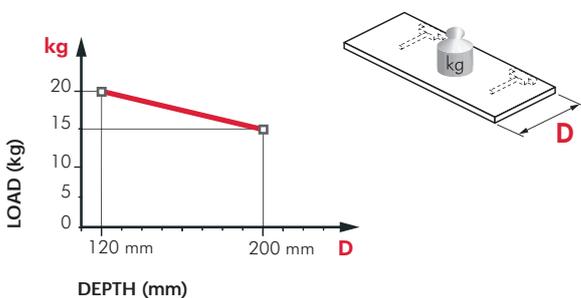

### RECOMMENDED NUMBER OF TRIADE SLIM PER SHELF

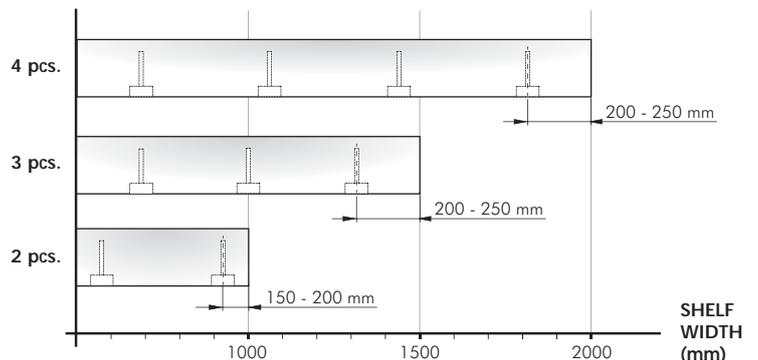

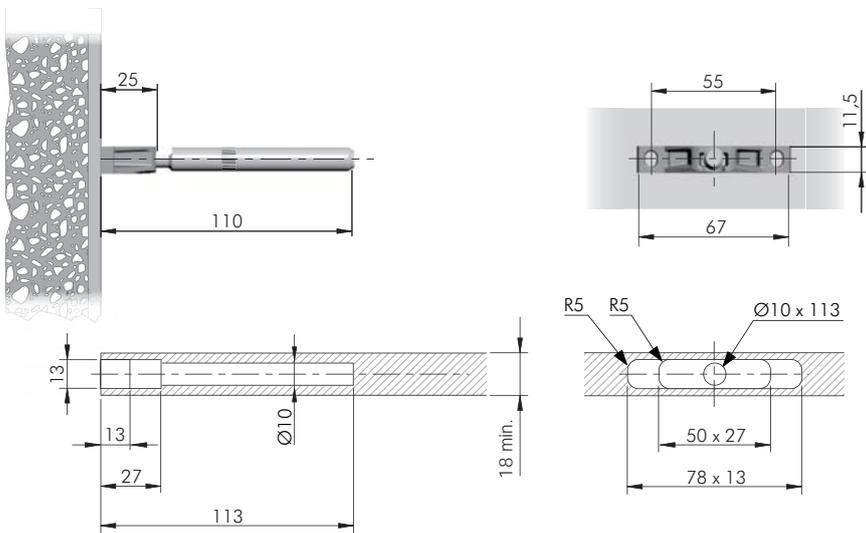


= open ended wrenches S2-S6

ZA ST EP = 100 pcs.

123   
**1622501000**



## OPTIONAL DRILLING FOR SECURITY LOCKING

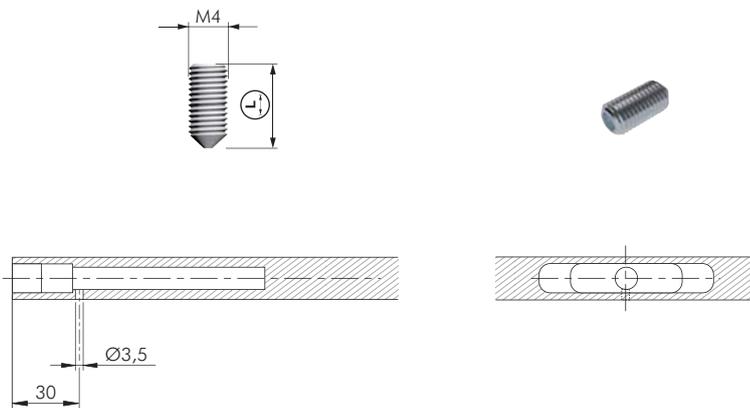

= S2 mm

ST = 100 pcs.



123	L	1mm
<b>21105210ZN</b>	6	18-20 mm
<b>21105180ZN</b>	10	25 mm

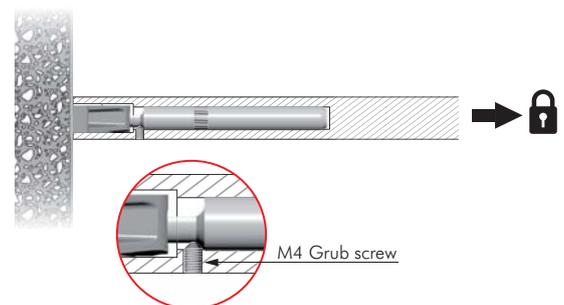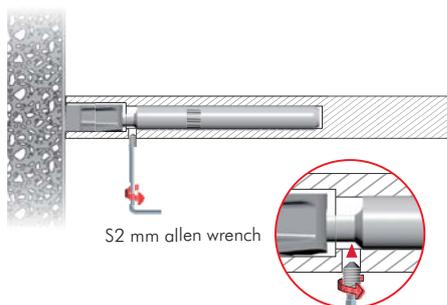


## TRIADE SLIM AND BRACKET





OPTIONAL SECURITY LOCKING

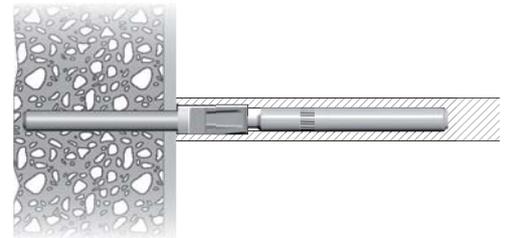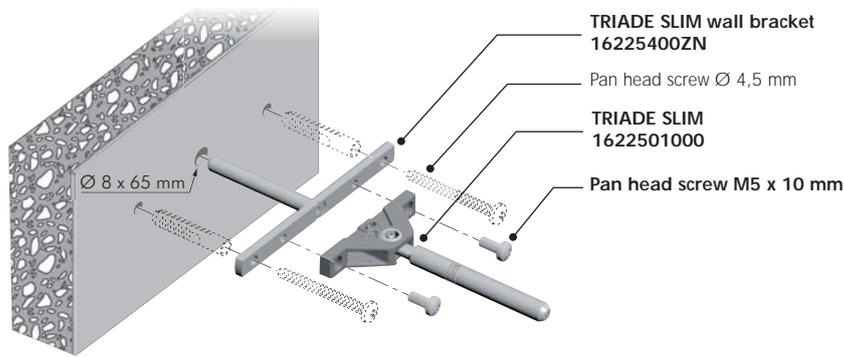



The wall bracket guarantees a more stable fixing to the wall. It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

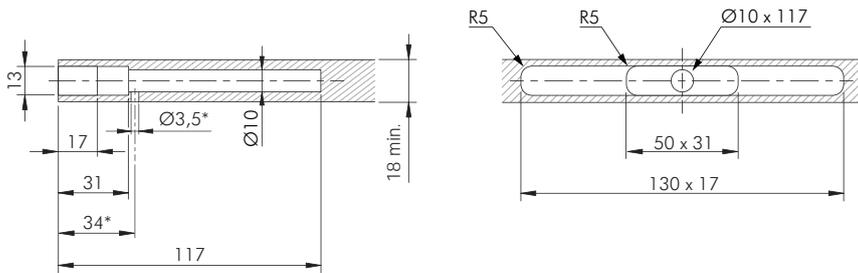

\* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Slim section.

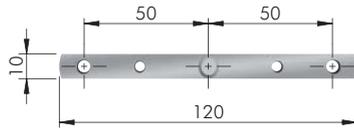


## FIXING ACCESSORY

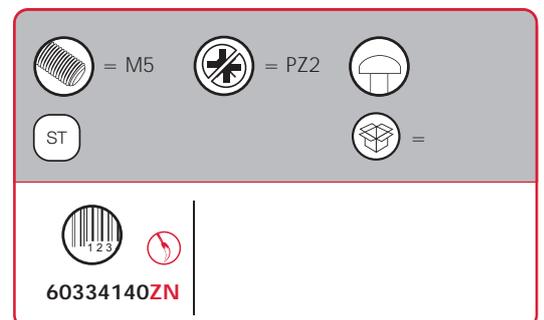

## TRIADE SLIM ACCESSORIES

---



ST

 = 1000 pcs.



62501090Z**N**




ST

 = 500 pcs.



62501040Z**N**

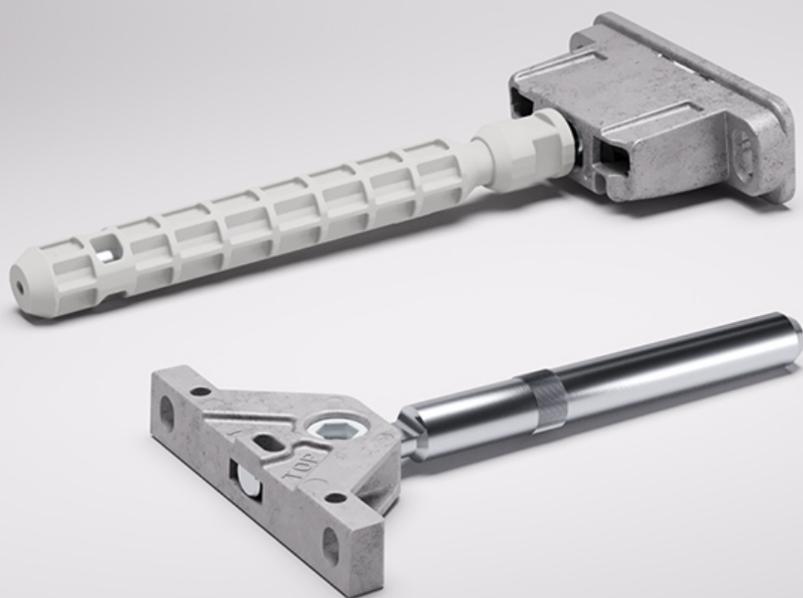

Triade Pro  
System


## TRIADE PRO MINI



25 mm min.


15 kg per pair for shelf 250 mm deep

### SPECIFICATION

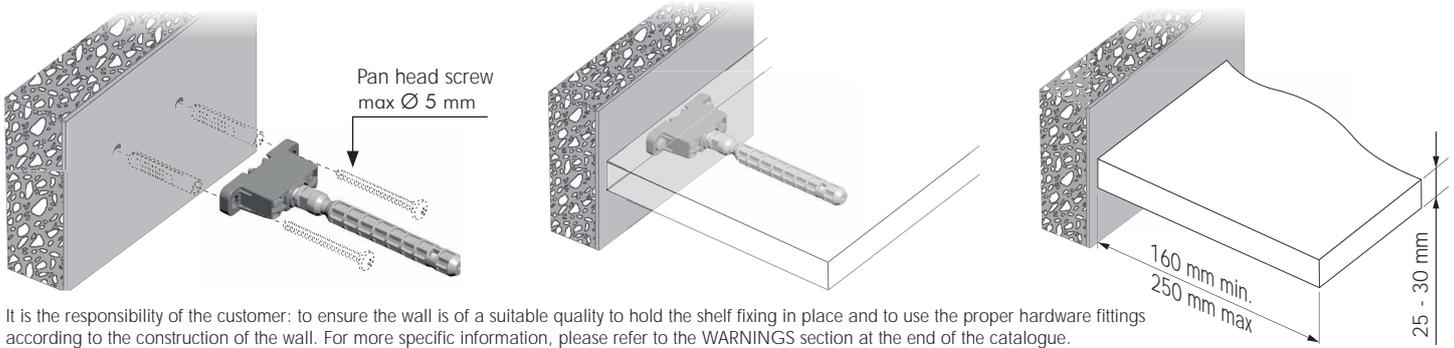


It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

### ADJUSTMENT




Screw to lock when adjustments are finished.





### BRACKET ALIGNMENT



### LATERAL ADJUSTMENT




### INCLINATION ADJUSTMENT

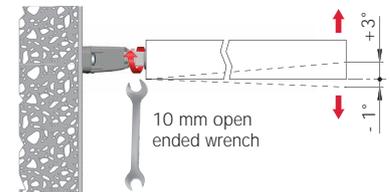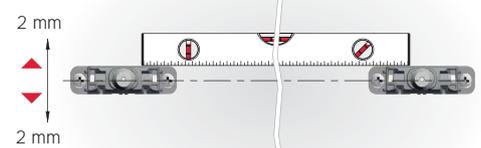



### CAPACITY LOADING CHART

(The figures refer to 2 shelf supports)

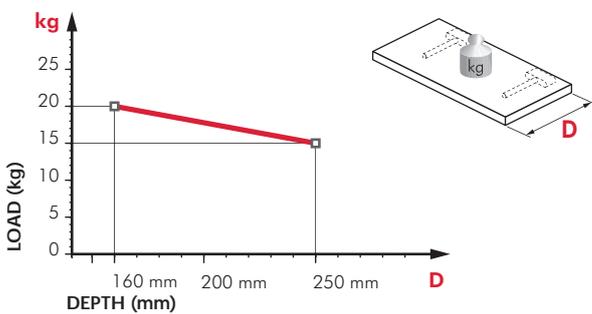


### RECOMMENDED NUMBER OF TRIADE PRO MINI PER SHELF

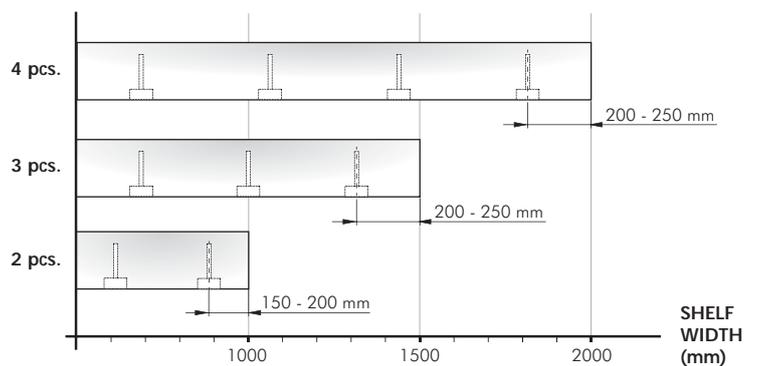


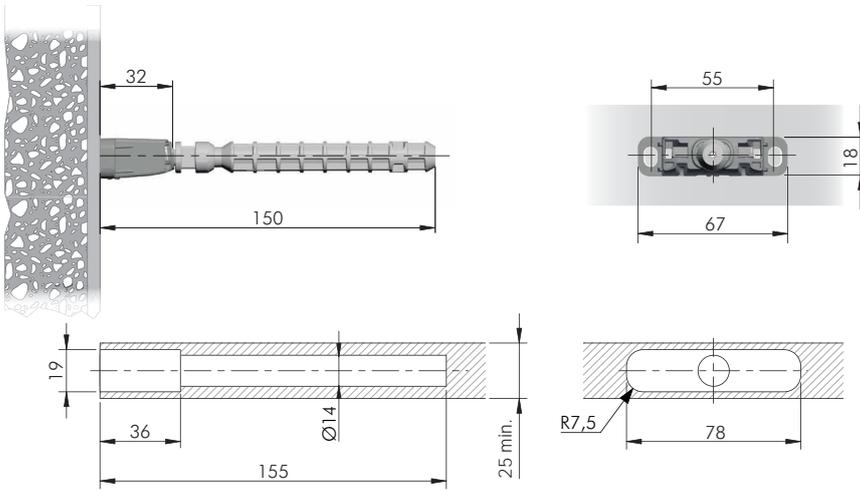


= PZ2	= open ended wrench 10 mm
ZA	ST
123	= 50 pcs.
<b>1623001000</b>	


## OPTIONAL DRILLING FOR SECURITY LOCKING

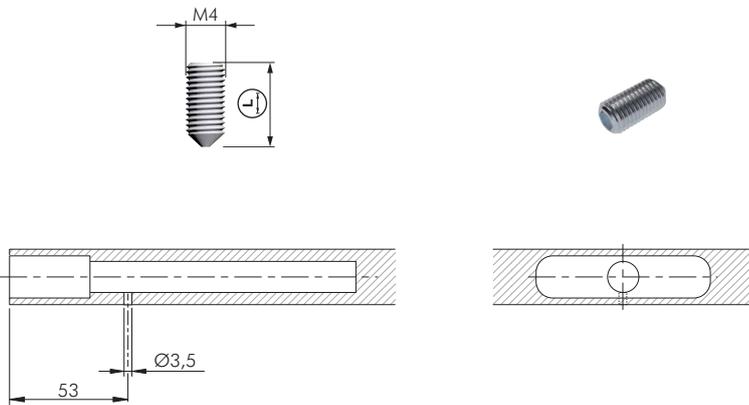

= S2	= 100 pcs.	
ST		
123		
<b>21105170ZN</b>	8	25
<b>21105180ZN</b>	10	30

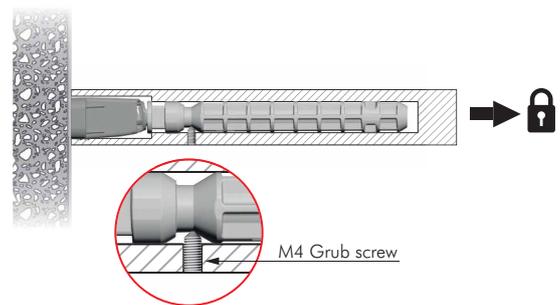
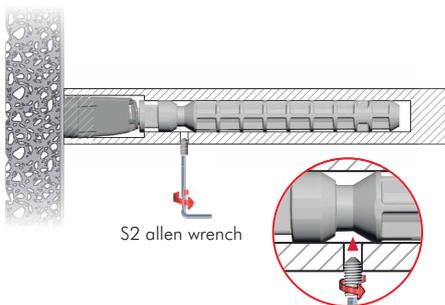


## TRIADE PRO MINI AND BRACKET

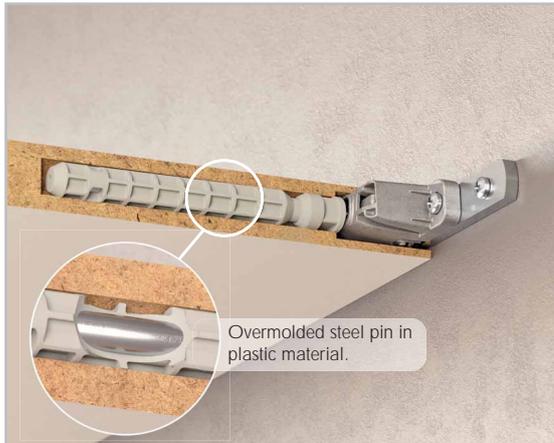



25 mm min.

OPTIONAL SECURITY LOCKING

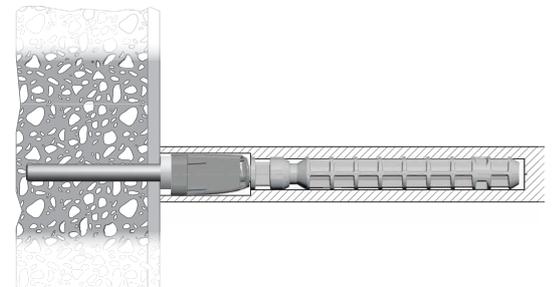
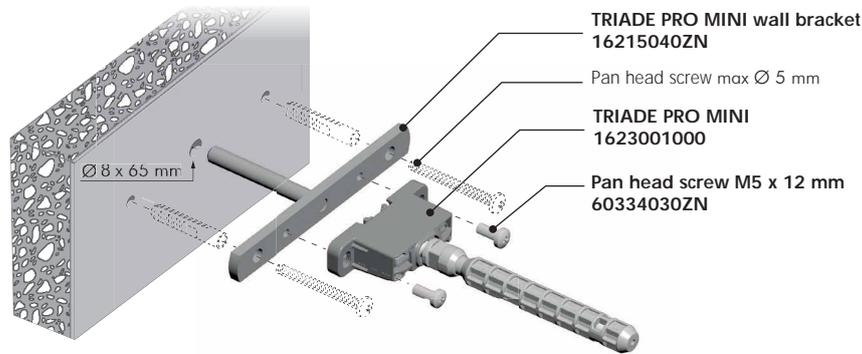


The wall bracket guarantees a more stable fixing to the wall.

It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

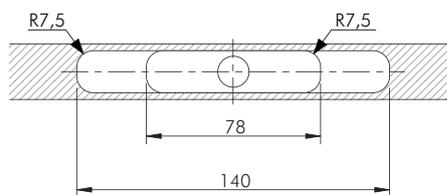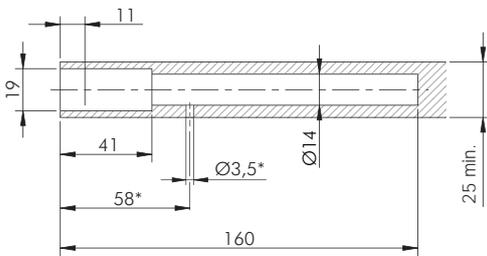


\* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Pro Mini section.

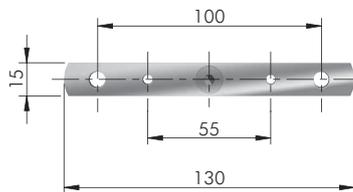


ST	= 100 pcs.
123	
<b>16215040ZN</b>	

## FIXING ACCESSORY



= M5	= PZ2	= 7000 pcs.
ST	123	
<b>60334030ZN</b>		


## TRIADE PRO

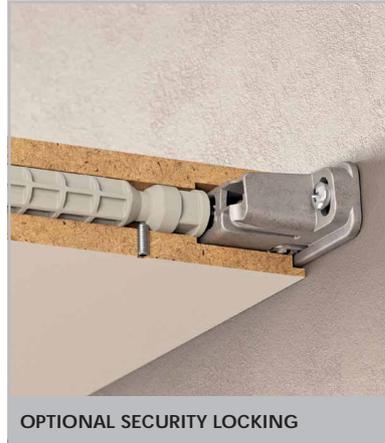

30-40 mm


30 kg per pair for shelf 300 mm deep

### SPECIFICATION

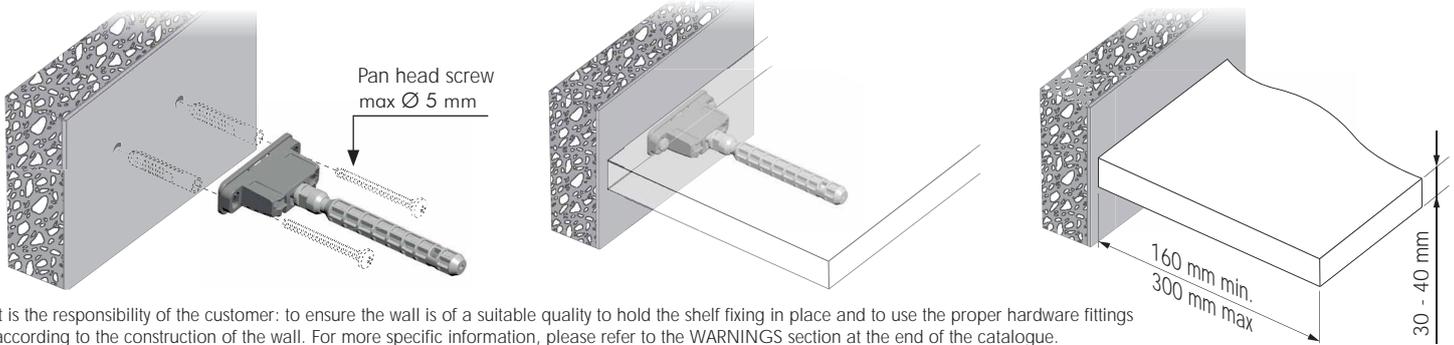


It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

### ADJUSTMENT




Screw to lock when adjustments are finished.





### BRACKET ALIGNMENT



### LATERAL ADJUSTMENT




### INCLINATION ADJUSTMENT

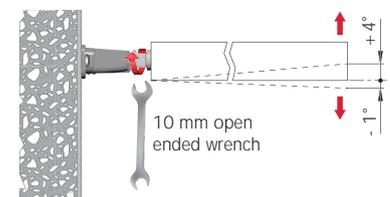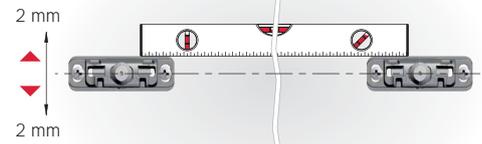






### CAPACITY LOADING CHART

(The figures refer to 2 shelf supports)

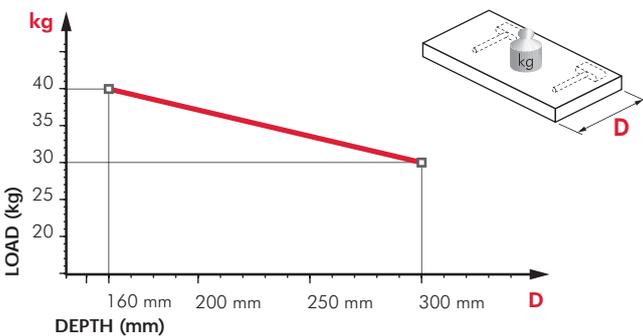


### RECOMMENDED NUMBER OF TRIADE PRO PER SHELF

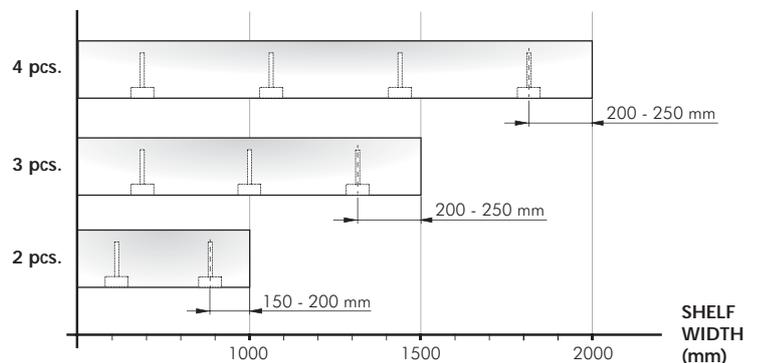


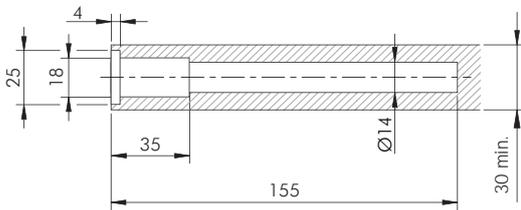

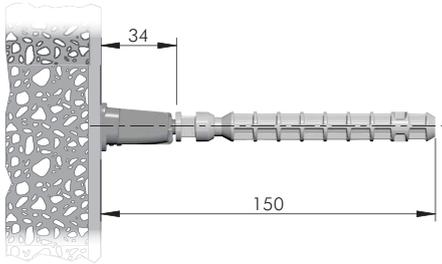


	= PZ2		= open ended wrench 10 mm
			= 50 pcs.
<b>1623002000</b>			



## OPTIONAL DRILLING FOR SECURITY LOCKING




	= S2		= 100 pcs.
<b>21105180ZN</b>	10	30	
<b>21105220ZN</b>	16	40	

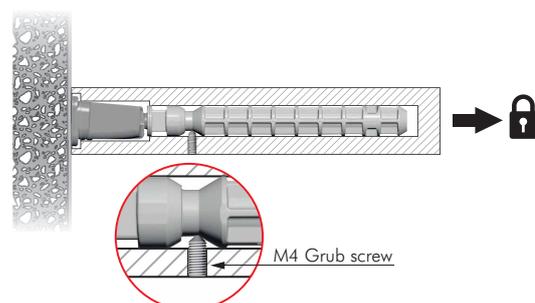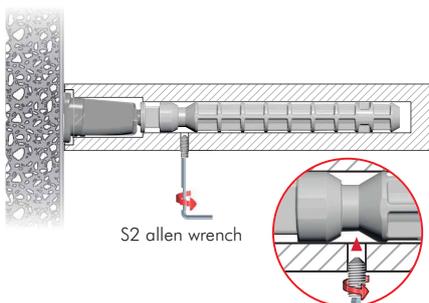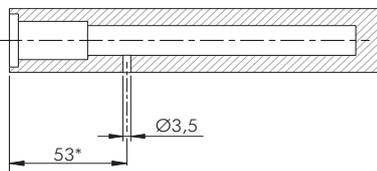

## TRIADE PRO AND BRACKET

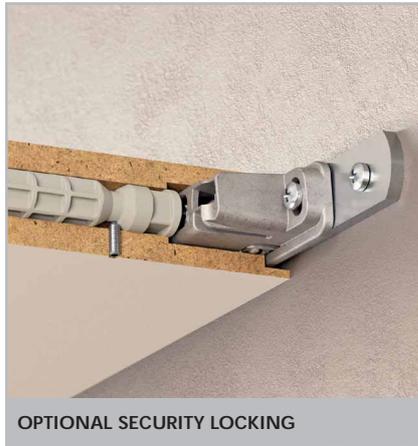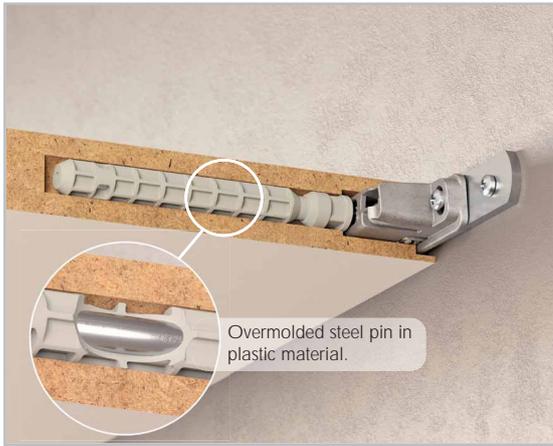

OPTIONAL SECURITY LOCKING

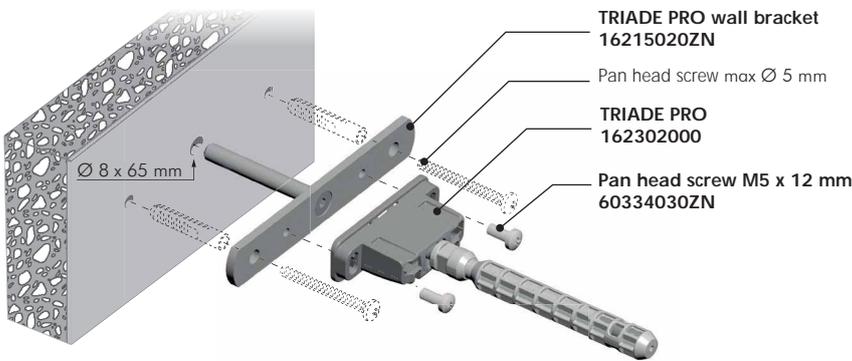


TRIADE PRO wall bracket  
16215020ZN

Pan head screw max Ø 5 mm



TRIADE PRO  
162302000

Pan head screw M5 x 12 mm  
60334030ZN


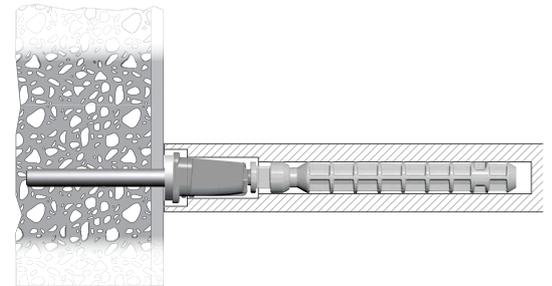


The wall bracket guarantees a more stable fixing to the wall.

It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

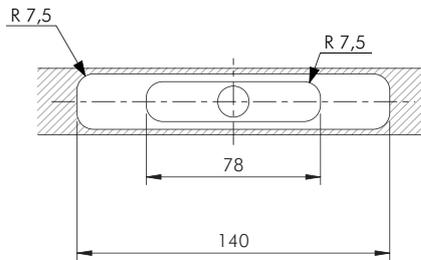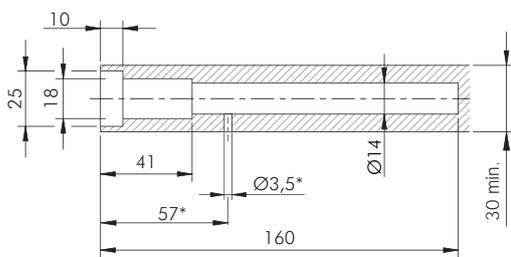


\* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Pro section.

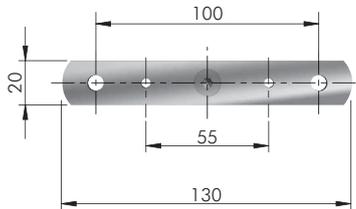

ST	= 100 pcs.
123	
<b>16215020ZN</b>	

## FIXING ACCESSORY



= M5	= PZ2	
ST	= 7000 pcs.	
123		
<b>60334030ZN</b>		


## TRIADE PRO MAXI



40 mm min.


30 kg per pair for shelf 400 mm deep

### SPECIFICATION

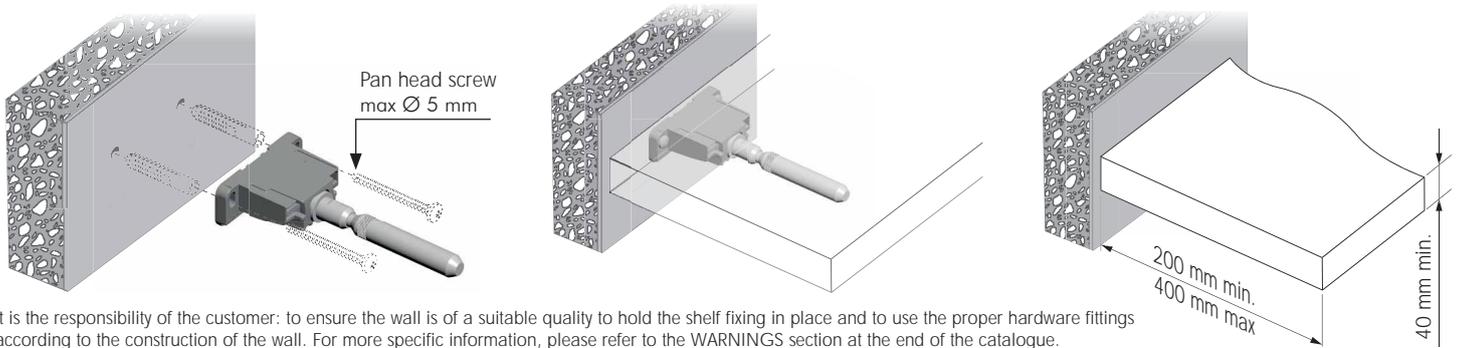


It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

### ADJUSTMENT




Screw to lock when adjustments are finished.





### BRACKET ALIGNMENT



### LATERAL ADJUSTMENT




### INCLINATION ADJUSTMENT

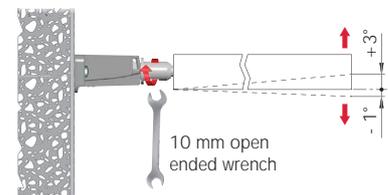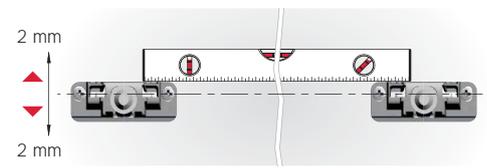


### CAPACITY LOADING CHART




(The figures refer to 2 shelf supports)

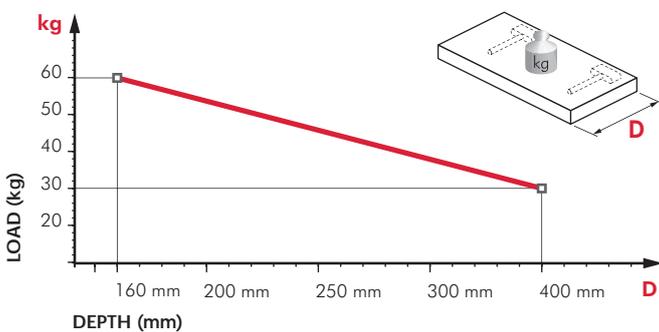

### RECOMMENDED NUMBER OF TRIADE PRO MAXI PER SHELF

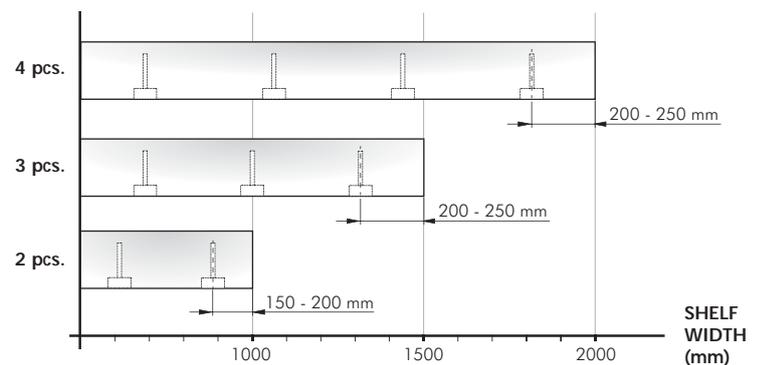

**VERY IMPORTANT**  
Centre of the hole is shifted 3,5 mm upwards. Please keep in mind when levelling the shelf.




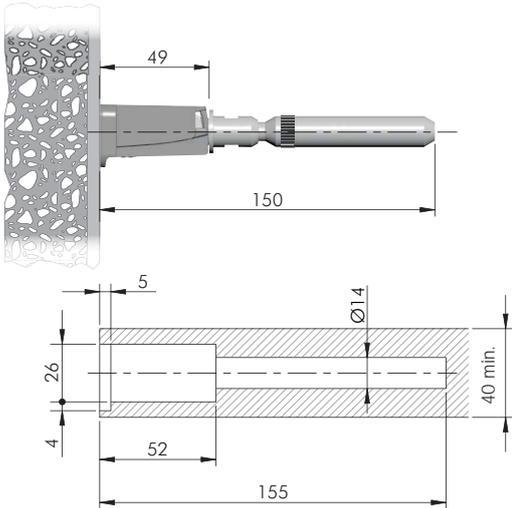


	= PZ2		= open ended wrench 12 mm
	ZA		ST
	123		= 50 pcs.
<b>P210524100</b>			

## OPTIONAL DRILLING FOR SECURITY LOCKING





	= S2		= 100 pcs.
	ST		L
	123		16
<b>21105220ZN</b>			40
<b>21105060ZN</b>			20
			50

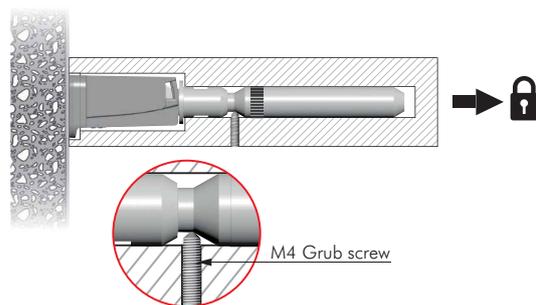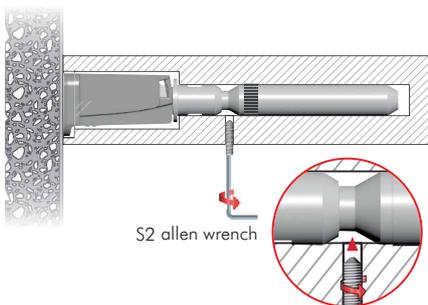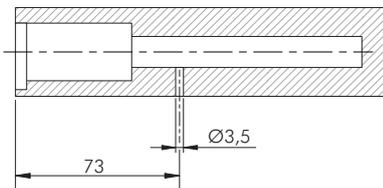

## TRIADE PRO MAXI AND BRACKET





OPTIONAL SECURITY LOCKING

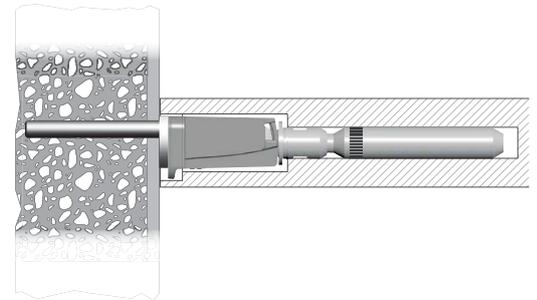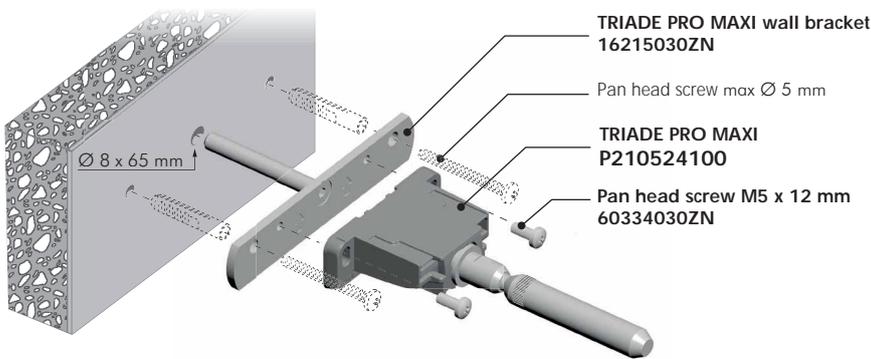


The wall bracket guarantees a more stable fixing to the wall.

It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

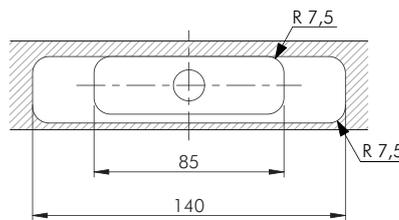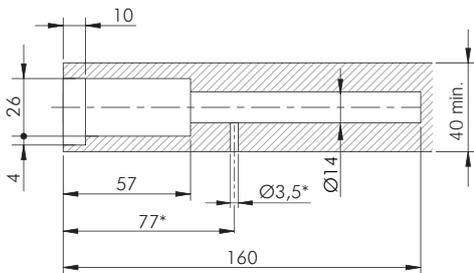

\* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Pro Maxi section.

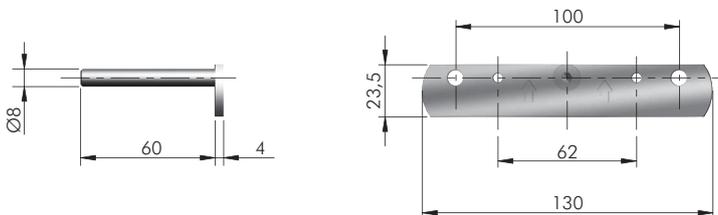


ST	= 100 pcs.
<b>16215030ZN</b>	

## FIXING ACCESSORY



= M5	= PZ2	
ST	= 7000 pcs.	
<b>60334030ZN</b>		


## TRIADE PRO XXL

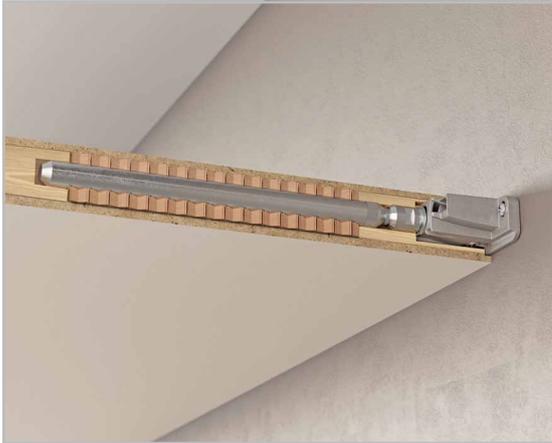

40 mm min.


40 kg per pair  
for shelf 400 mm deep

### SPECIFICATION

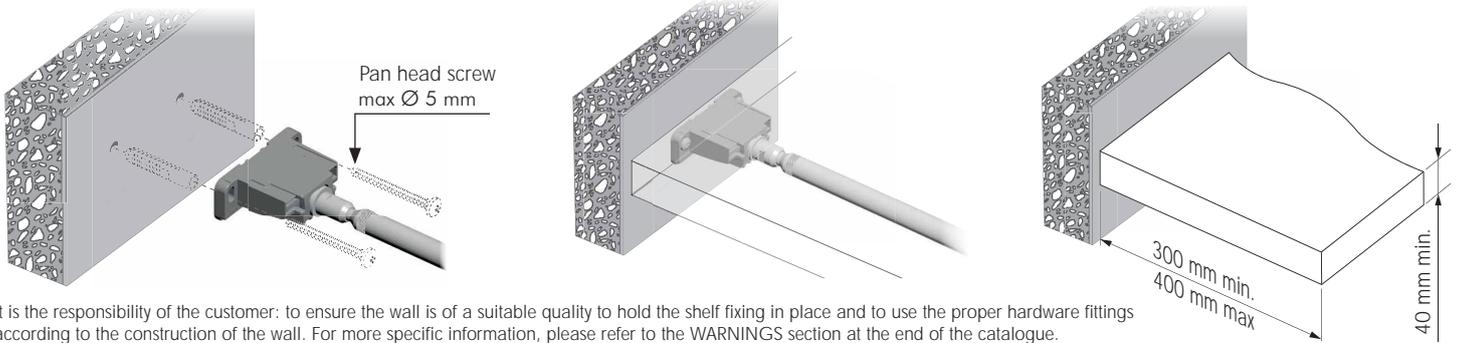


It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

### ADJUSTMENT

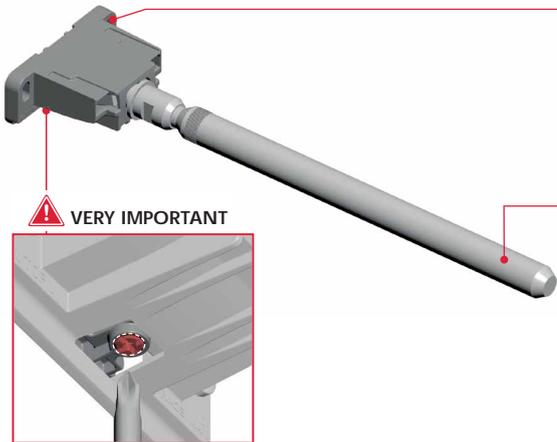


Screw to lock when adjustments are finished.





### BRACKET ALIGNMENT



### LATERAL ADJUSTMENT




### INCLINATION ADJUSTMENT

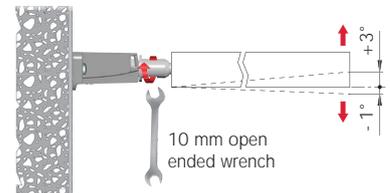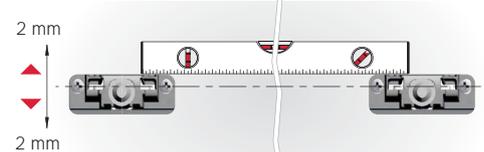


### CAPACITY LOADING CHART

(The figures refer to 2 shelf supports)


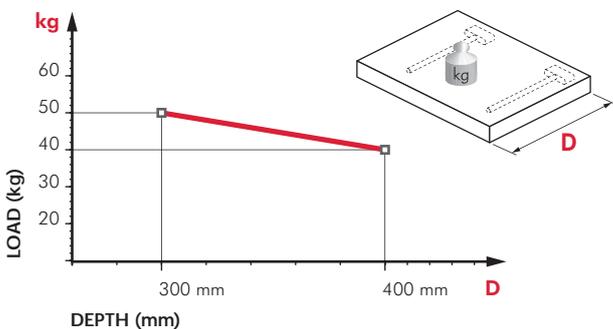


### RECOMMENDED NUMBER OF TRIADE PRO XXL PER SHELF

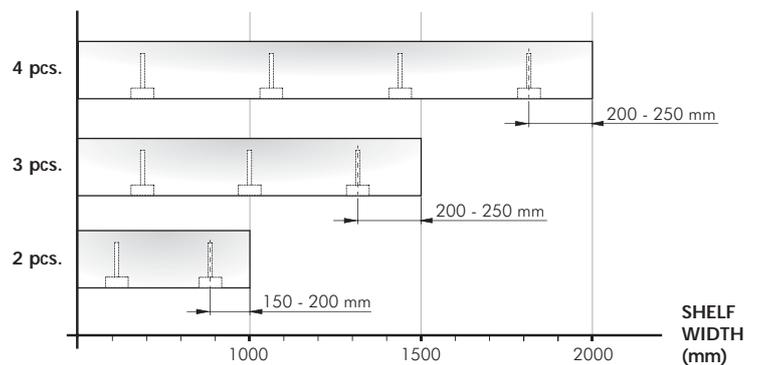







	= PZ2		= open ended wrench 12 mm
	ZA		ST
			= 25 pcs.
<b>P222023000</b>			

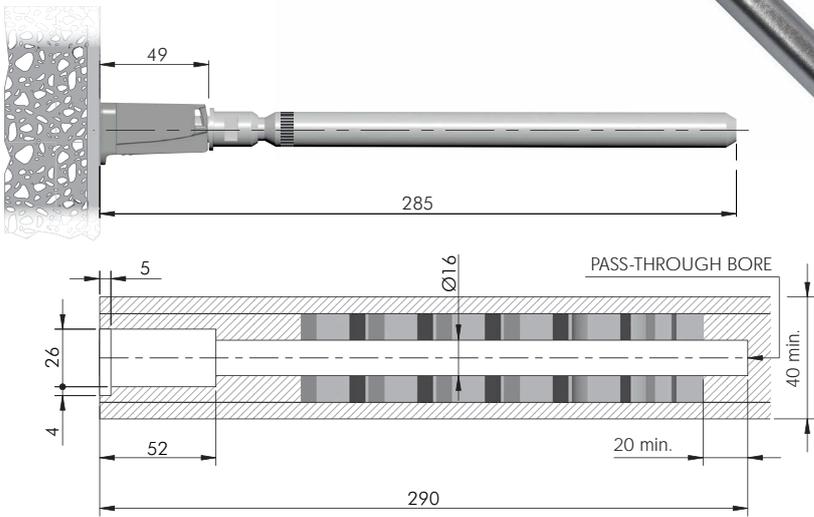



**VERY IMPORTANT**  
Centre of the hole is shifted 3,5 mm upwards. Please keep in mind when levelling the shelf.




### OPTIONAL DRILLING FOR SECURITY LOCKING

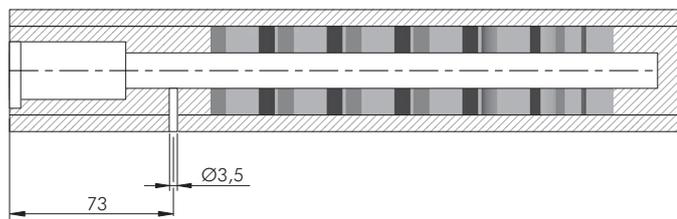



	= S2		= 100 pcs.
	ST		
		14	40
<b>21105190ZN</b>		20	50
<b>21105060ZN</b>			

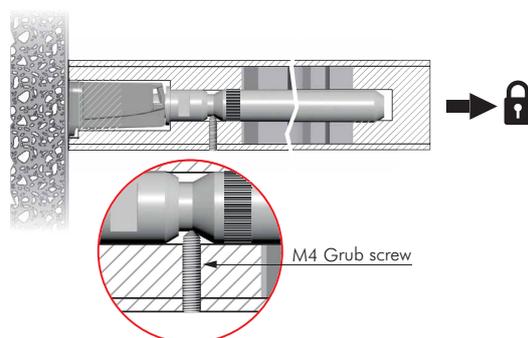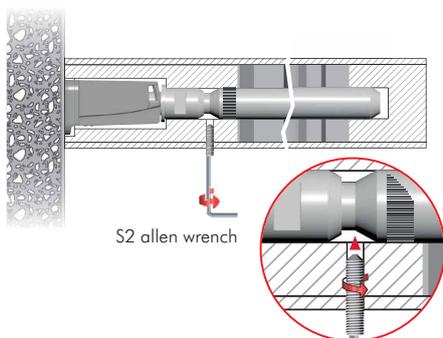


## TRIADE PRO XXL AND BRACKET

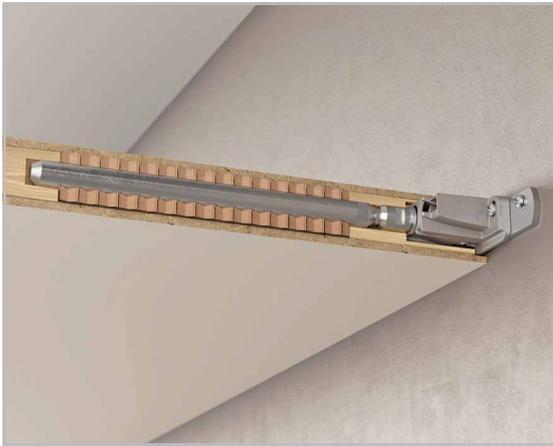


OPTIONAL SECURITY LOCKING

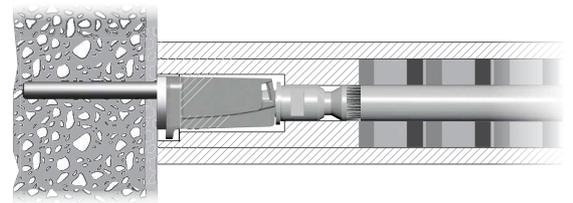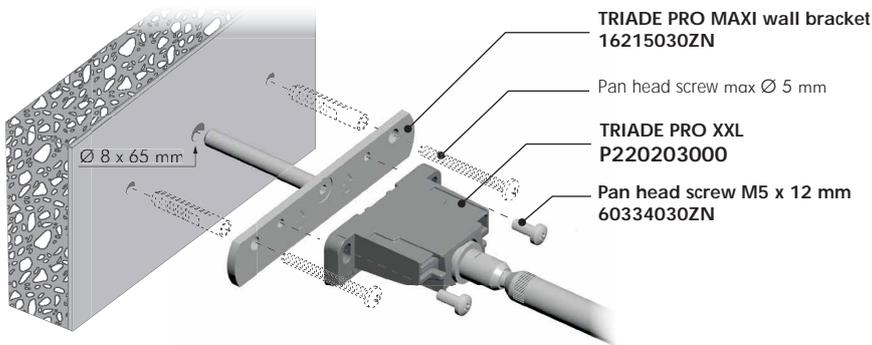

It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

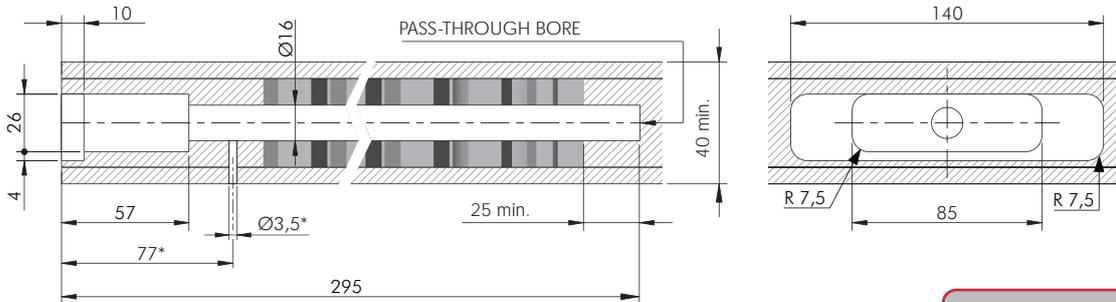

\* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Pro XXL section.

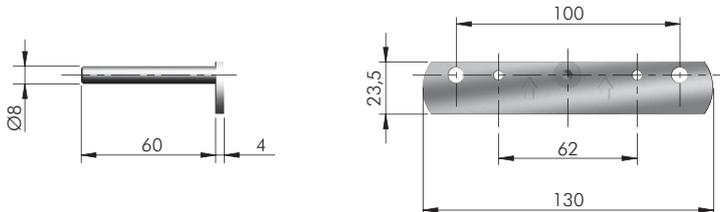

## FIXING ACCESSORY



ST = 100 pcs.

123

**16215030ZN**

= M5 = PZ2

ST = 7000 pcs.

123



**60334030ZN**

## DRILLING JIG FOR TRIADE PRO





50 mm MAX

### GENERAL SPECIFICATIONS

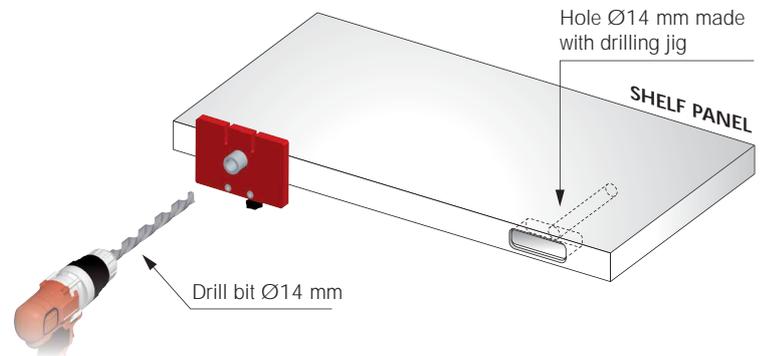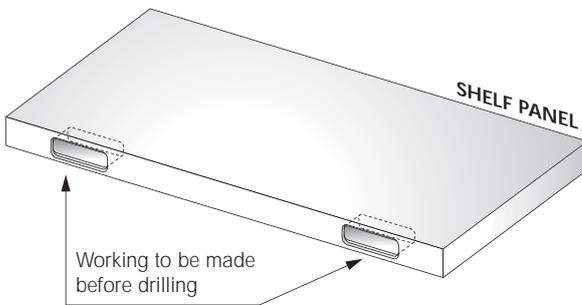

### APPLICATION

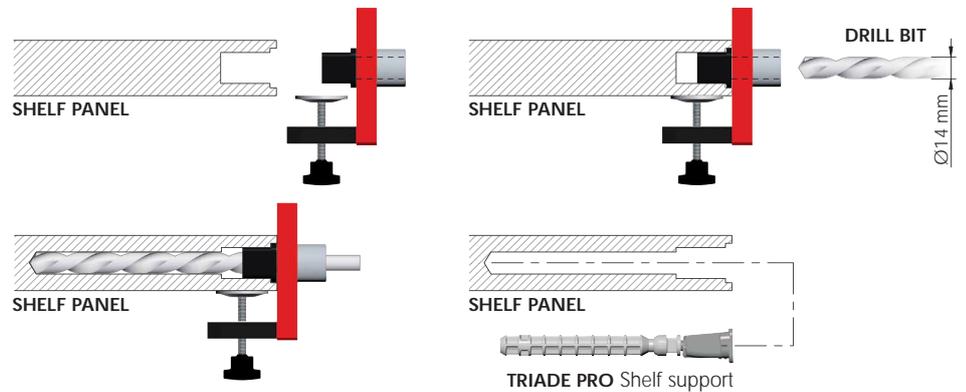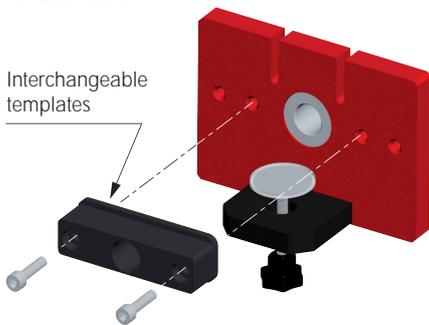

### TEMPLATES AVAILABLE



TEMPLATE FOR TRIADE PRO MINI Part no. YOJG013500	TEMPLATE FOR TRIADE PRO Part no. YOJG013600	TEMPLATE FOR TRIADE PRO MAXI Part no. YOJG013700	TEMPLATE FOR TRIADE PRO MINI AND TRIADE PRO ALUMINIUM PROFILE Part no. YOJG013800	TEMPLATE FOR TRIADE PRO MAXI ALUMINIUM PROFILE Part no. YOJG013900
Triade Pro Mini	Triade Pro	Triade Pro Maxi	Alu. profile for Triade Pro Mini and Triade Pro	Alu. profile for Triade Pro Maxi
Triade Pro Mini and Bracket	Triade Pro and Bracket	Triade Pro Maxi and Bracket	Triade Pro Mini	Triade Pro Maxi

## TRIADE PRO DRILLING JIG




## TRIADE PRO DRILLING JIG TEMPLATES

### TRIADE PRO MINI DRILLING PLAN

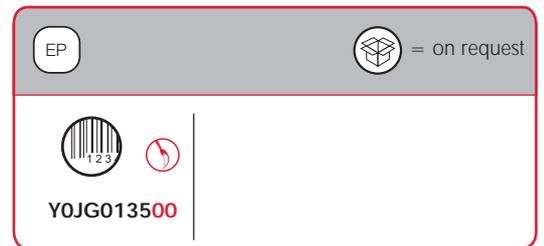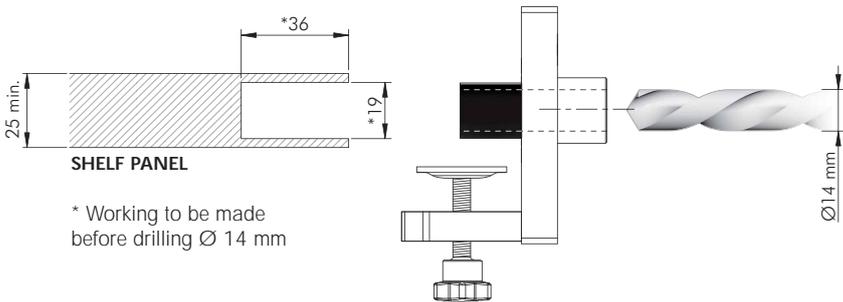


### TRIADE PRO MINI AND BRACKET DRILLING PLAN

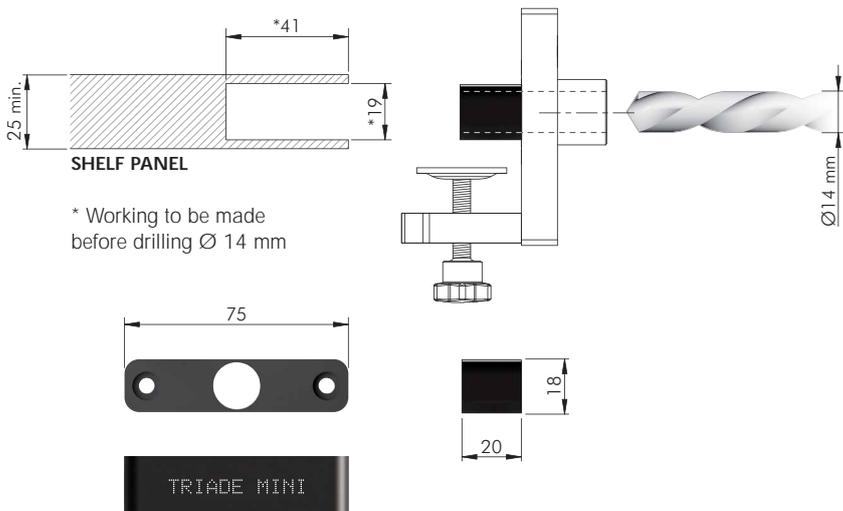


NOTE: The product code includes the fixing screws.




**TRIADE PRO DRILLING PLAN**

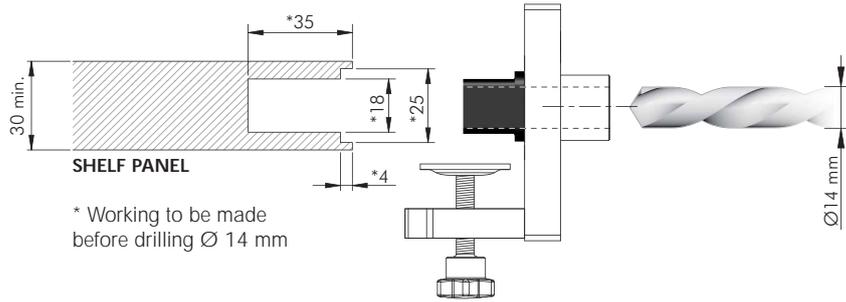


**TRIADE PRO AND BRACKET DRILLING PLAN**

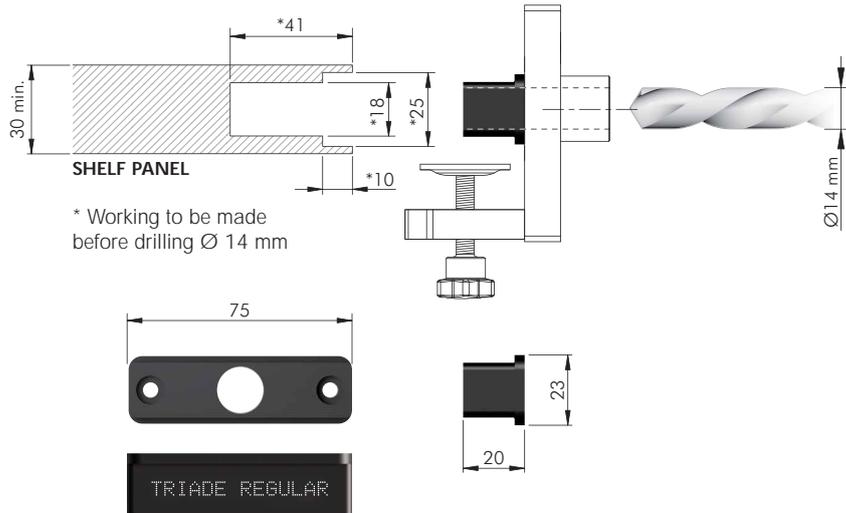

**TRIADE PRO MAXI DRILLING PLAN**

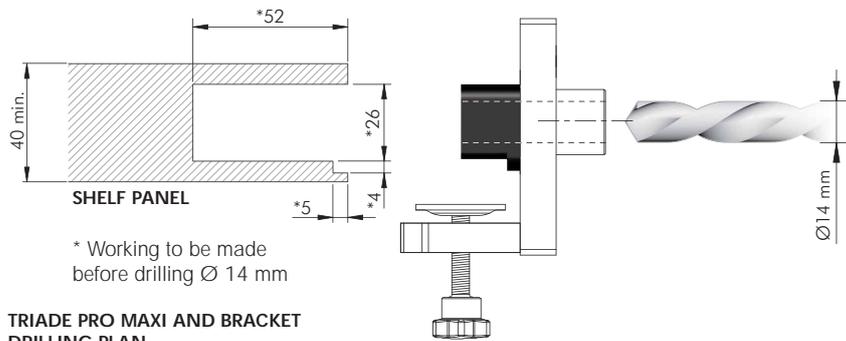

**TRIADE PRO MAXI AND BRACKET DRILLING PLAN**

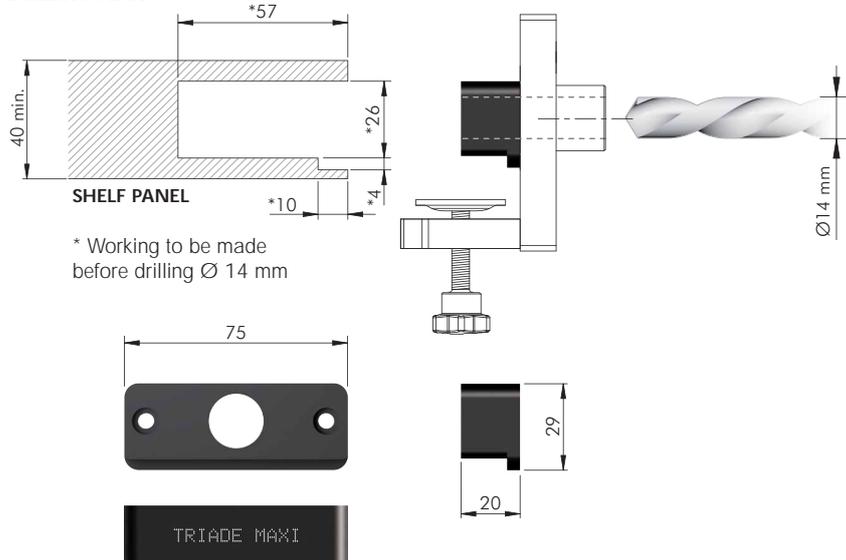

EP = on request

**Y0JG013600**

NOTE: The product code includes the fixing screws.




EP = on request

**Y0JG013700**

NOTE: The product code includes the fixing screws.




**TRIADE PRO MINI WITH ALU PROFILE DRILLING PLAN**


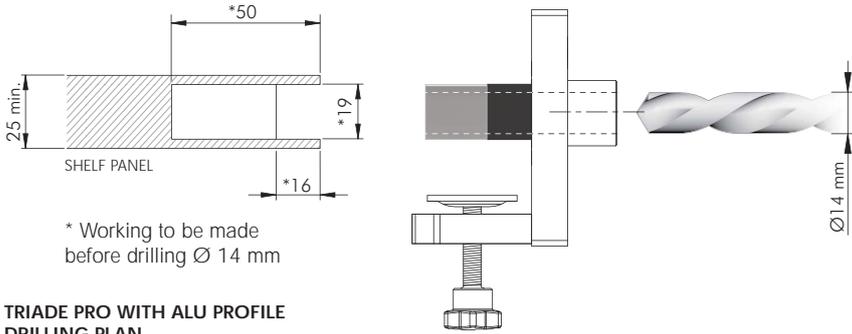


\* Working to be made before drilling Ø 14 mm

**TRIADE PRO WITH ALU PROFILE DRILLING PLAN**

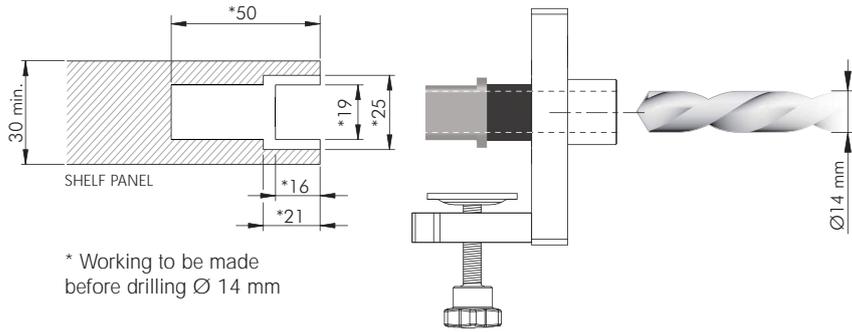

\* Working to be made before drilling Ø 14 mm




ALUMINIUM PROFILE TRIADE MINI TRIADE REGULAR


EP = on request

123


**Y0JG013800**

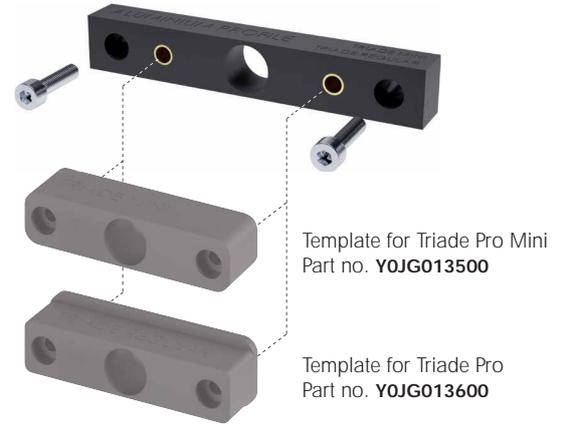

**TRIADE PRO MAXI WITH ALU PROFILE DRILLING PLAN**

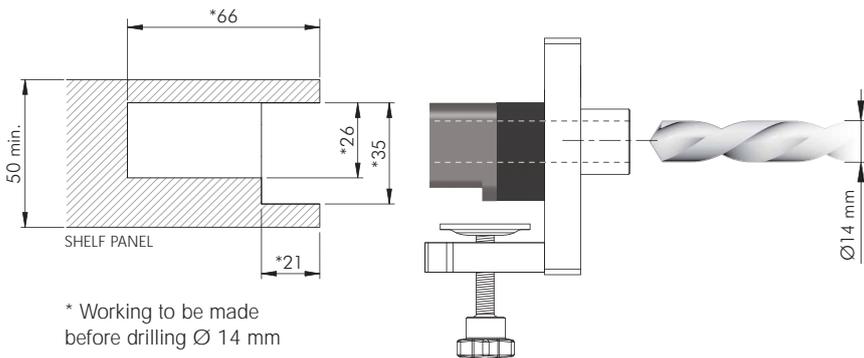

\* Working to be made before drilling Ø 14 mm



ALUMINIUM PROFILE TRIADE MAXI

EP = on request

123



**Y0JG013900**



## TRIADE PRO DRILLING JIG INSERT FOR SECURITY LOCKING




### GENERAL SPECIFICATIONS

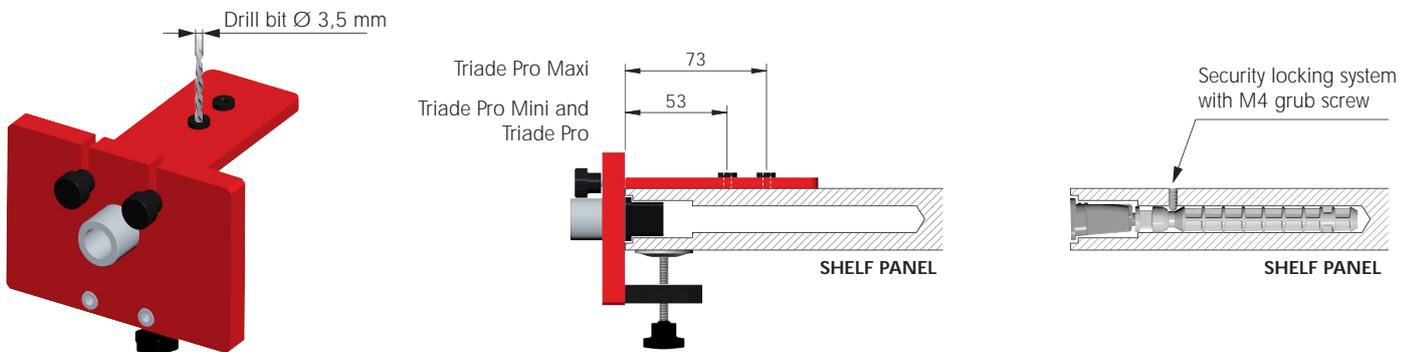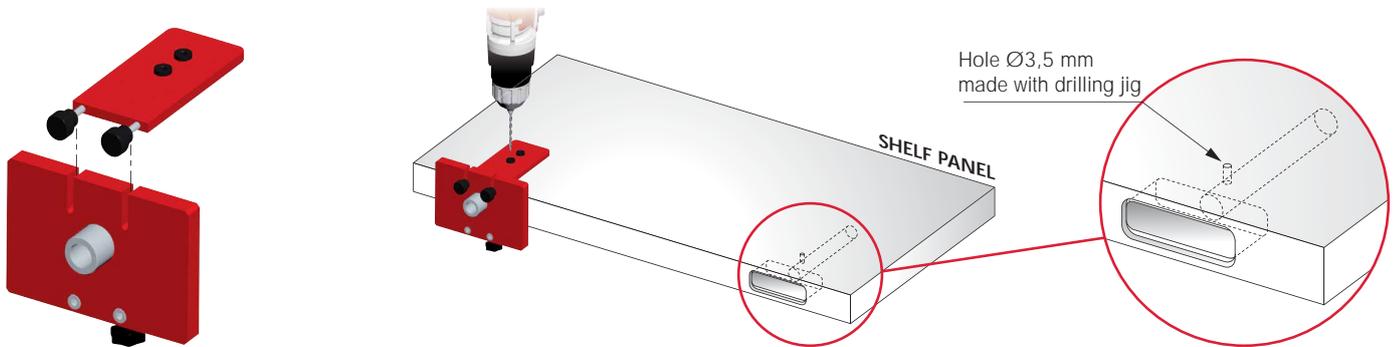

### SPACERS AVAILABLE


#### SPACER FOR TRIADE PRO WALL BRACKETS

Part no. YOJG054900



#### SPACER FOR TRIADE PRO ALUMINIUM PROFILES

Part no. YOJG055000



## DRILLING JIG INSERT FOR SECURITY LOCKING



## SPACERS FOR SECURITY LOCKING

