Technical Specifications

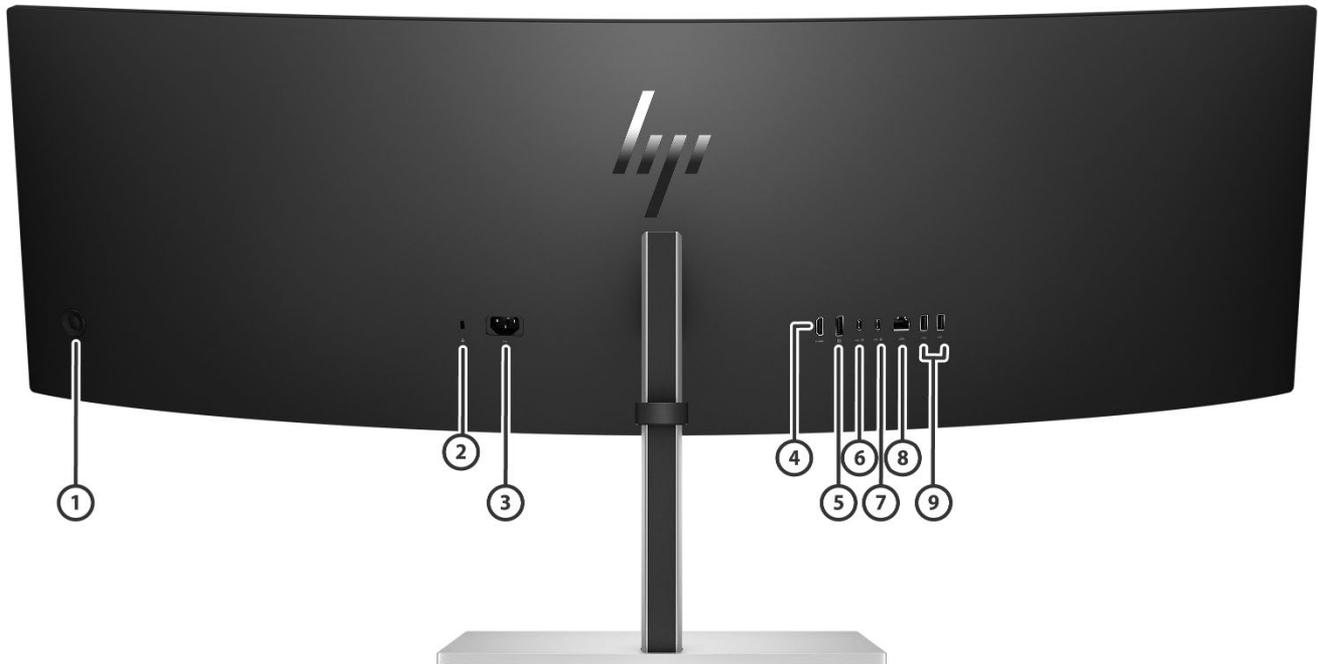**HP E45c G5 DQHD Curved Monitor**

Front

1. SuperSpeed USB Type-A 5Gbps signaling rate (2, 1 charging)
2. Ambient Light Sensor
3. Power Button
4. LED Power

Technical Specifications

HP E45c G5 DQHD Curved Monitor

Back

1. Joypad OSD button

2. Security Cable Slot

3. Power Connector
4. HDMI 2.1 Port
5. DisplayPort™ 1.4

6. SuperSpeed USB Type-C® 5Gbps signaling rate (Up to 65W USB Power Delivery, Alt Mode DisplayPort™ 1.4)

7. SuperSpeed USB Type-C® 5Gbps signaling rate (Up to 65W USB Power Delivery, Alt Mode DisplayPort™ 1.4)

8. RJ-45 Port
9. SuperSpeed USB Type-A 5Gbps signaling rate (2)

Technical Specifications

Model: 6N4C1AA

Panel Specifications	Display Size (Diagonal)	44.5" (113.0 cm)
	Viewable Diagonal Size	44.5" (113.0 cm)
	Panel Technology	VA
	Curved	1500R
	Max Refresh Rate	165Hz
	Native Resolution	DQHD (5120 x 1440)
	Panel Bit Depth	True 8 bit
	Aspect Ratio	32:9
	Brightness (Typical)	400 nits
	Contrast Ratio (Static)	3000:1
	Dynamic Contrast Ratio	8000000:1 =8M:1
	Flicker Free	Yes
	Pixel Pitch	0.21 x 0.21 mm
	Pixels Per Inch (PPI)	120 PPI
	Display Colors	Up to 16.7 million colors supported
	Backlight Lamp Life Minimum (To Half Brightness - In Hours)	30k
	Backlight Type	Edge-lit
	Screen Treatment	Anti-glare
	Hardness	3H
	Haze	25%
	Response Time (Typical)	3ms GtG (with overdrive)
	Horizontal Viewing Angle (Typical Cr>10)	178°
	Vertical Viewing Angle (Typical Cr>10)	178°
	Panel Active Area Metric (W X H)	108.75 x 30.59 cm
	Panel Active Area Imperial (W X H)	42.81 x 12.04inch
	Variable Refresh Rate Technology	FreeSync Premium

NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Color	sRGB	99%

Color Management	Color Space/ Subsampling Support	RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2
	RGB Channel Adjust	Yes, Gain
	Default Color Temperature	Neutral (6500K)
	Factory Color Presets	Warm - 5000K,
		Neutral - 6500K,
		Cool - 9300K

Monitor Specifications	Bezel Type	3-sided borderless
	Color Of Stand	Black & Silver
	Color Of Head	Black
	Tilt	-5°~+20°
	Swivel	±10°
	Height Adjust Range	150 mm
	Vesa Mounting	100 mm x 100 mm

Technical Specifications

	Security Lock	Security lock-ready
	Detachable Stand	Yes
	Warranty	3/3/0 for LA, NA, EMEA, APJ (3/3/3 in select APJ Countries)
	Low Blue Light	Yes, HP Eye Ease (TÜV Low Blue Light Hardware Solution certified)
	Speaker Output Power	2x3 W
	Management Software	HP Display Center* HP Client Management Script Library (CMSL)** *Host PC requires Windows 10 and above. HP Display Center is available on the Microsoft store. ** HP CMSL is only supported on 64-bit PowerShell 5.1 and higher. CMSL Support Windows 10 version 1809 and higher, and Windows 11. Some limitations may apply to legacy displays. Visit support.hp.com to download HP CMSL.
On Screen Display (OSD)	**On Screen Display**	Brightness+, Color, Image, Input, Spilt Screen, Power, Menu, Management, Information
	Native Resolution	DQHD (5120 x 1440)
	Maximum Resolution	DQHD (5120 x 1440 @ 165Hz)
	Preset Graphic Modes/Supported Resolutions	640 x 480 @ 60Hz 720 x 400 @ 60Hz 800 x 600 @ 60Hz 1024 x 768 @ 60Hz 1280 x 720 @ 60Hz 1280 x 800 @ 60Hz 1280 x 1024 @ 60Hz 1440 x 900 @ 60Hz 1600 x 900 @ 60Hz 1680 x 1050 @ 60Hz 1920 x 1080 @ 60Hz 1920 x 1200 @ 60Hz 2560 x 1440 @ 60Hz 2560 x 1440 @120Hz 2560 x 1440 @165Hz 3440 x 1440 @ 60Hz 3440 x 1440 @75Hz 3440 x 1440 @100Hz 5120 x1440 @ 60Hz 5120x1440 @ 70Hz 5120x1440 @ 75Hz 5120x1440 @120Hz 5120x1440 @ 165Hz
	Minimum Vertical Scan Rate	48 Hz
	Maximum Vertical Scan Rate	165 Hz
	Minimum Horizontal Scan Rate	30.0 kHz
	Maximum Horizontal Scan Rate	250.0 kHz
	Maximum Pixel Clock	1400.0 MHz
	User Programmable Modes	Yes, 20

QuickSpecs

Technical Specifications

	User-Assignable Function Buttons	Yes, 4 (9 options)
	Audio	Built-in 2x3W speakers
	Languages	11 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese, S-Chinese and Russian)
Connector Types	**DisplayPort™**	1 DisplayPort™ 1.4
	HDMI	1 HDMI 2.1
	HDCP	Yes, DisplayPort™, HDMI and USB Type-C®
	USB Type-C® Video Input	2 SuperSpeed USB Type-C® 5Gbps signaling rate (up to 100W USB Power Delivery for single PC connection and dynamic power delivery with two PCs is 65W each, Alt Mode DisplayPort™ 1.4)*
		*Dynamic Power Delivery between 2 ports up to 130W, with one port max up to 100W, the other port min 30W.
	USB- A	4 SuperSpeed USB Type-A 5Gbps signaling rate (1 charging)
	ETHERNET	1 RJ-45 (10/100/1000 Mbps)
Special Features	**Picture-in-Picture, Picture-by-Picture**	Yes, PBP only
	SWITCH	Monitor Power button
		PbP / Up button
		Volume / Down button
		Next Active Input / Left button
		Color / Right button
		Menu / Enter button
	Remote Manageability*, **	Through HP Client Management Script Library (CMSL), In-Band MAC Address Pass Through (MAPT), In-Band Wake on LAN (WoL), PXE Boot, Out-of-Band MAC Address Pass Through (MAPT), Out-of-Band Wake on LAN (WoL).
		*Not all notebooks support remote manageability.
		**Out-of-band manageability only available with HP G7, G8 and G9 HP notebooks and not supported on non-HP devices.
	User Presets	23
	User Updateable Firmware	Yes
	KVM	Yes, OSD switch and keyboard switch
	Other Special Features	Ambient Light Sensor, Single Power On, Virtual Dual Display, Device Bridge 2.0
Power & Operating Specs	**Power Supply**	Internal
	Power Source	100 – 240 VAC 50/60 Hz
	Power Consumption- Max	275 W
	Energy Saving/Stand By Mode	0.5 W
	Power Consumption - Typical	55 W
Energy Star Data	**Operational Mode at 100 VAC**	43.68 W
	Operational Mode at 115 VAC	43.6 W

QuickSpecs

Technical Specifications

	Operational Mode at 230 VAC	43.25 W
EU Energy Efficiency Class (ErP LOT-5)	**On-mode Power Consumption for Standard Dynamic Range (SDR)**	38W
	ErP LOT5 Energy Efficiency Class for Standard Dynamic Range (SDR)	A↑G **G**
Operating Conditions	**Operating Temperature - Celsius**	5° – 35°C
	Operating Temperature - Fahrenheit	41° – 95°F
	Non-Operating Temperature - Celsius	–40° – 65°C
	Non-Operating Temperature - Fahrenheit	-40° – 149°F
	Operating Humidity	20 – 80% Relative Humidity (non-condensing)
	Non-Operating Humidity	5 – 95%
	Operating Altitude	0 – 5,000 m (16,400 ft.)
	Non-operating Altitude	0 – 12,192 m (40,000 ft.)
Certifications and Compliances	**Low Halogen**	Yes* *External power supplies, WWAN modules, power cords, cables and peripherals excluded.
	Agency Approvals and Certifications	WW application CE/CB/KC/KCC/NOM/PSB/ICE/TUV-S/ISO 9241-307/ EAC/UL/CSA/ISC/CCC/CEL/CECP/TCO/TCO Certified Edge/Energy Star/ISC/VCCI/FCC/BSMI/WEEE/PSE / cTUVus/ BIS/ UAE/ Ukraine EE/ E-Standy(Korea MEPS)/ NRCS/ TGM
	Microsoft WHQL Certification	Win 10, Win 11
	ENERGY STAR® Certified	Yes
	EPEAT® Registered **Regions need to verify by country**	EPEAT® Gold in United States* *Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit http://www.epeat.net for more information.
	China Energy Label	CEL Grade 2* *Monitors produced from June 2024 comply with China regulation GB 21520-2023.
	TCO Certified Edge	Yes
	TCO Certified	Yes
	SmartWay Transport Partnership - NA only	Yes (NA sku)
Contains Recycled Plastics	**Contains Recycled Plastics**	Contains ocean-bound recycled plastic*; 80% ITE-derived closed loop plastic** *All plastic parts contain ocean-bound plastic. Percentage of ocean-bound plastic contained in each component varies by product. ** ITE Derived Closed Loop Plastic percentage is based on the definition set in the IEEE 1680.1-2018 standard.
	Recycled Aluminum	90% recycled aluminum in the stand

QuickSpecs

Technical Specifications

		Metric	Imperial
	Recyclable Packaging (Box, packing materials)	Outside Box and corrugated cushions are 100% sustainably sourced and recyclable* *100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers.*	
Unit Product/Package Specifications	**Product Dimensions** (Unpacked with stand) (W x D x H)	108.43 x 30.7 x 52.18 cm	42.7x12.1x20.5 inch
	Product Dimensions (Packed) (W x D x H)	126.7 x 28 x 48.5 cm	49.88 x 11.02 x 19.09 inch
	Display Head Dimensions (Unpacked without stand) (W x D x H)	108.43 x 14.81 x 33.56 cm	42.7 x 5.6 x 13.21 inch
	Base Area Footprint (w x d mm)	320 x 267 mm	11.89 x 10.31 inch
	Bezel Measurements	Bottom: 18.6 mm	Bottom: 7.32 in
	Product Weight (Unpacked with stand)	14.6 kg	32.18 lbs
	Product Weight (Packed)	22.47 kg	49.53 lbs
	Product Weight (Head Only)	10.10 kg	22.26 lbs
Pallet Information	**Pallet Dimensions** (L x W x H mm)	Slip Sheet: 1277 x 1130 x 1962mm (20' ft/40' ft) Slip Sheet: 1277 x 1130 x 2450 mm (40' HQ) Pallet: 1277 x 1130 x 2085 mm (20' ft/40' ft) Pallet: 1277 x 1130 x 2085 mm (40' HQ)	Slip Sheet: 50.28 x 44.49 x 77.24 inch (20' ft/40' ft) Slip Sheet: 50.28 x 44.49 x 96.46 inch (40' HQ) Pallet: 50.28 x 44.49 x 82.09 inch (20' ft/40' ft) Pallet: 50.28 x 44.49 x 82.09 inch (40' HQ)
	Pallet Total Weight	Slipsheet: 366.5 kg (20'ft/40'ft), 456.1kg (40'HQ) Pallet: 380.5kg (40'HQ/40'ft)	Slipsheet: 807.8lbs (20'ft/40'ft), 1005.3lbs (40'HQ) Pallet: 838.7lbs (40'HQ/40'ft/20'ft)
	Pallet Layers	Slip Sheet: 4 layers per pallet (20' ft/40' ft) Slip Sheet: 5 layers per pallet (40' HQ) Pallet: 4 layers per pallet (20' ft/40' ft/40' HQ)	
	Pallet Product per Layer	4 per layer	
	Total Products per Pallet	Slip Sheet: 16 sets per pallet (20' ft/40' ft) Slip Sheet: 20 sets per pallet (40' HQ) Pallet: 16 sets per pallet (20' ft/40' ft/40' HQ)	
	Container Load, 20-Foot	128 sets (slip sheet and pallet)	
	Container Load, 40-Foot	288 sets (slip sheet and pallet)	

Technical Specifications

	Container Load, 40-Foot HighQ	288 sets (pallet) 360 sets (slip sheet)
What's in the box?		AC power cord (1.83m) 5.9ft 2 x USB 3.2 C-C cable (1.0m) Warranty Quick Setup Poster
User Guide and Warranty Languages	**User Guide Languages**	Arabic, Bahasa Indonesia, Bulgarian, Chinese-S, Chinese-T, Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Kazakh, Korean, Latvian, Lithuanian, Norwegian, Polish, Portuguese (Brazilian), Portuguese (Iberian), Romanian, Russian, Serbian, Slovak, Slovenian, Spanish, Swedish, Thai, Turkey, Ukrainian
	Warranty Languages	English US (EN), English AP (EN-AP), English LA (EN-LA), English UK (EN-GB), Arabic (AR) -17x, Bahasa Indonesia (ID), Bosnian (BS), Bulgarian (BG), Chinese-S (CN), Chinese-T (TW), Croatian (HR), Czech (CS), Danish (DA), Dutch (NL), Estonian (ET), Finnish (FI), French Canadian (FC), French European (FR), German (DE), Greek (EL), Hebrew (HE), Hungarian (HU), Italian (IT), Japanese (JA), Kazakh (KK), Korean (KO), Latvian (LV), Lithuanian (LT), Norwegian (NO), Polish (PL), Portuguese, Brazilian (BR), Portuguese, Iberian (PT), Romanian (RO), Russian (RU), Serbian (SR), Slovak (SK), Slovenian (SL), Spanish, Castilian (ES-ES), Spanish, Latin America (ES-MX), Swedish (SV), Thai (TH) Turkish (TR), Ukrainian (UK), Vietnamese (VI)

Technical Specifications

ENVIRONMENTAL DATA

Eco-Label Certifications & declarations	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks: • IT ECO declaration • US ENERGY STAR® • US Federal Energy Management Program (FEMP) • EPEAT® Gold registered in the United States. See http://www.epeat.net for registration status in your country. • TCO Certified Edge • China Energy Conservation Program (CECP) • China State Environmental Protection Administration (SEPA) • Taiwan Green Mark • Korea Eco-label • Japan PC Green label*
Sustainable Impact Specifications	• Ocean-bound plastic in Speaker,Stand • 80% post-consumer recycled plastic • Low halogen • Outside Box and corrugated cushions are 100% sustainably sourced and recyclable • Molded Paper Pulp Cushion inside box is 100% sustainably sourced and recyclable • Recycled Plastic cushions
System Configuration	The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a "Typically Configured Notebook".

Energy Consumption (in accordance with US ENERGY STAR® test method)	**115VAC, 60Hz**	**230VAC, 50Hz**	**100VAC, 50Hz**
Normal Operation (Short idle)	43.6 W	43.25 W	43.73 W
Normal Operation (Long idle)	43.6 W	43.25 W	43.73 W
Sleep	0.43 W	0.44 W	0.43 W
Off	0.27 W	0.28 W	0.28 W
	NOTE: Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.		
Heat Dissipation*	**115VAC, 60Hz**	**230VAC, 50Hz**	**100VAC, 50Hz**
Normal Operation (Short idle)	149.1 BTU/hr	147.9 BTU/hr	149.6 BTU/hr
Normal Operation (Long idle)	149.1 BTU/hr	147.9 BTU/hr	149.6 BTU/hr

Technical Specifications

Sleep	1.5 BTU/hr	1.5 BTU/hr	1.5 BTU/hr
Off	0.9 BTU/hr	1.0 BTU/hr	1.0 BTU/hr

	*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.
Longevity and Upgrading	This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.
Additional Information	• This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC. • This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. • This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). • This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net • Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043. • This product is 96.5% recycle-able when properly disposed of at end of life.

Packaging Materials	External:	PAPER/Corrugated	1721 g
		PAPER/Corrugated	2526 g
		PAPER/Paper	3000 g
	Internal:	PLASTIC/EPE (Expanded Polyethylene)	78 g
	The plastic packaging material contains at least 0.0% recycled content.		
	The corrugated paper packaging materials contains at least 80.0% recycled content.		

RoHS Compliance	HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam. We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products. We met our voluntary objective to achieve worldwide compliance with the new EU RoHS requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve. To obtain a copy of the HP RoHS Compliance Statement, see HP RoHS position statement.
Material Usage	This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at

Technical Specifications

	http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html): • Asbestos • Certain Azo Colorants • Certain Brominated Flame Retardants – may not be used as flame retardants in plastics • Cadmium • Chlorinated Hydrocarbons • Chlorinated Paraffins • Bis(2-Ethylhexyl) phthalate (DEHP) • Benzyl butyl phthalate (BBP) • Dibutyl phthalate (DBP) • Diisobutyl phthalate (DIBP) • Formaldehyde • Halogenated Diphenyl Methanes • Lead carbonates and sulfates • Lead and Lead compounds • Mercuric Oxide Batteries • Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user. • Ozone Depleting Substances • Polybrominated Biphenyls (PBBs) • Polybrominated Biphenyl Ethers (PBBEs) • Polybrominated Biphenyl Oxides (PBBOs) • Polychlorinated Biphenyl (PCB) • Polychlorinated Terphenyls (PCT) • Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications. • Radioactive Substances • Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
Packaging Usage	HP follows these guidelines to decrease the environmental impact of product packaging: • Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials. • Eliminate the use of ozone-depleting substances (ODS) in packaging materials. • Design packaging materials for ease of disassembly. • Maximize the use of post-consumer recycled content materials in packaging materials. • Use readily recyclable packaging materials such as paper and corrugated materials. • Reduce size and weight of packages to improve transportation fuel efficiency. • Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
End-of-life Management and Recycling	HP offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These

Technical Specifications

	instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

HP, Inc. Corporate Environmental Information	For more information about HP's commitment to the environment:
	
	Global Citizenship Report
	    http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html
	Eco-label certifications
	    http://www8.hp.com/us/en/hp-information/environment/ecolabels.html
	 ISO 14001 certificates:
	    http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842
	    and
	    http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf

footnotes	• Percentage of ocean-bound plastic contained in each component varies by product • Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard. • External power supplies, WWAN modules, power cords, cables and peripherals excluded. • 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers. • Fiber cushions made from 100% recycled wood fiber and organic materials. • Plastic cushions are made from >90% recycled plastic.

Summary

Change Log			
February 15, 2023	V1 to V2	Added	Environmental Data
April 11, 2023	V2 to V3	Updated	Color Management section
April 29, 2024	V3 to V4	Updated	China Energy Label
December 17, 2024	V4 to V5	Updated	HP Client Management Script Library (CMSL) Footnote
December 20, 2024	V5 to V6	Updated	HP Client Management Script Library (CMSL) and Footnote
July 10, 2025	V6 to V7	Updated	Color Management Section Special Features Section Contains Recycled Plastics Section Environmental Data Section