



D-Link DGS-1018P No administrado Gigabit Ethernet (10/100/1000) Energía sobre Ethernet (PoE) Negro

Marca : D-Link


Código del producto: DGS-1018P/E

Nombre del producto : DGS-1018P



- 16 puertos Gigabit Power Over Ethernet para alimentación y datos por el mismo cable de red LAN
- 2 puertos 1G SFP para uplinks mediante fibra óptica
- IEEE 802.3af/at estándar PoE (hasta 30 W/puerto), PoE Budget 240 W
- Switch DIP frontal para activar Flow Control, Port Isolation, PD Alive, PoE Extend Mode
- Puertos 1 al 8 soportan PoE Extend (hasta 250 metros distancia, en lugar del estándar de 100m)
- Flow control IEEE 802.3x evita la pérdida de paquetes
- Port Isolation/Storm Control para una seguridad robusta
- PD-alive reinicia los dispositivos que no respondan
- Switch gigabit no gestionado de 18 puertos con PoE

Características de administración		Control de energía	
Tipo de interruptor *	No administrado	Fuente de energía *	Corriente alterna
Calidad de servicio (QoS) soporte	✓	Fuente de alimentación incluida *	✓
Puertos e Interfaces		Voltaje de entrada AC	100 - 240 V
Cantidad de puertos básicos de conmutación RJ-45 Ethernet *	16	Frecuencia de entrada AC	50/60 Hz
Puertos tipo básico de conmutación RJ-45 Ethernet *	Gigabit Ethernet (10/100/1000)	Consumo de energía (max)	280,21 W
Cantidad de ranuras del módulo SFP	2	Alimentación a través de Ethernet (PoE)	
Conector eléctrico	Conector de alimentación AC-in	Energía sobre Ethernet (PoE) *	✓
Conexión		Cantidad de puertos Power over Ethernet (PoE)	16
Estándares de red *	IEEE 802.3, IEEE 802.3af, IEEE 802.3at, IEEE 802.3u, IEEE 802.3x	Potencia por puerto de alimentación a través de Ethernet (PoE)	30 W
Soporte 10G *	✗	Potencia a través de Ethernet (PoE) Presupuesto	240 W
Transmisión de datos		Condiciones ambientales	
Capacidad de conmutación *	36 Gbit/s	Intervalo de temperatura operativa	0 - 50 °C
Tasa de reenvío	26,78 Mpps	Intervalo de temperatura de almacenaje	-10 - 70 °C
Guardar y remitir	✓	Intervalo de humedad relativa para funcionamiento	10 - 95%
Jumbo Frames, soporte	✓	Intervalo de humedad relativa durante almacenaje	5 - 95%
Tramas Jumbo	9216	Disipación del calor	956,077 BTU/h
Memoria intermedia de paquetes	4,1 MB	Peso y dimensiones	
Diseño		Ancho	441 mm
Color del producto	Negro	Profundidad	210 mm
Indicadores LED	✓	Altura	44 mm
Desempeño		Peso	3,18 kg
Tiempo medio entre fallos	462928,28 h		

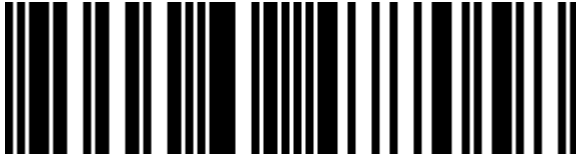

0790069477058



790069477058

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.