


Unit: mm
*Dimension

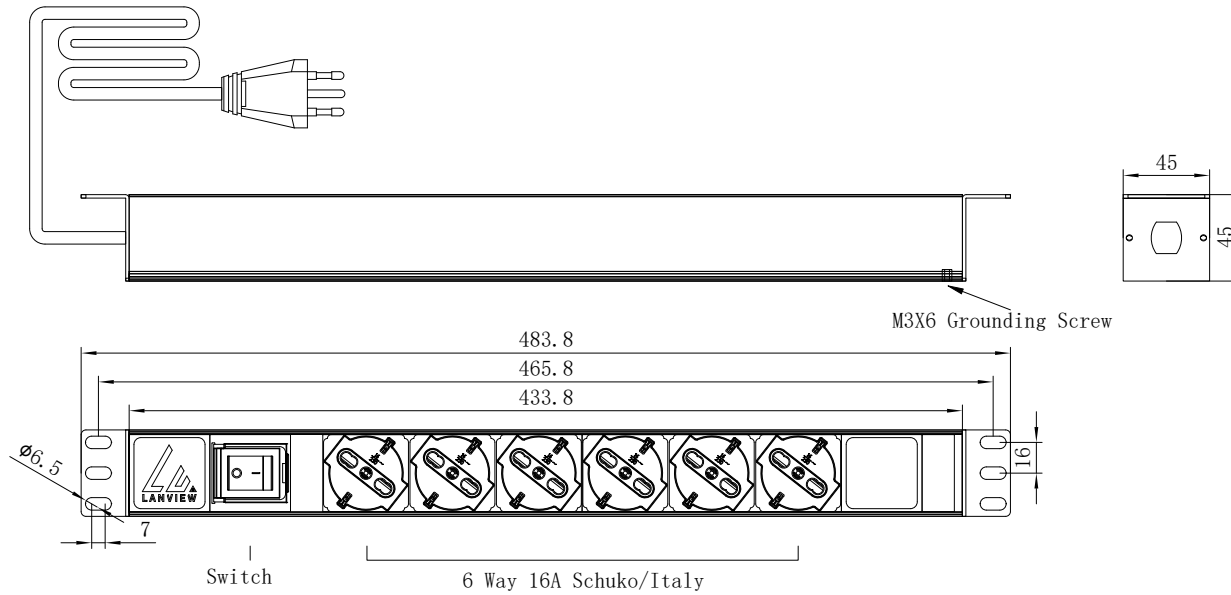

Technical Requirement

| NO. | Items | Description | | | | | |
|-----|------------------|--|---------|----------------|----------|-----------|-------|
| 1 | Electrical | Rated Voltage: | 250V AC | Rated Current: | 10A | Max Power | 2500W |
| 2 | Frame | Height | 1U | Material | Aluminum | Color | Black |
| 3 | Installation | Horizontal | | | | | |
| 4 | Socket/Number | 6 Way 16A Shuko/Italy | | | | | |
| 5 | Indication | Switch | | | | | |
| 6 | Monitoring | | | | | | |
| 7 | Cable Spec | 3G1.5mm ² 2M+Italy 10A Molding Plug (VDE IMQ) | | | | | |
| 8 | Fixed Mode | A4 Cable Buckle | | | | | |
| 9 | Inter Connection | Internal Cable 1.5mm ² , Grounding Cable 1.5mm ² | | | | | |
| 10 | Others | LOGO | WB-370 | LOGO | Lasar | | |

... Note:

Module

Logo Plate+Switch+4/10 Blank+4 Way 16A Schuko/Italy+Blank+4/10 Blank+1/10 Blank

| | | |
|--------------------|-------------------------|--|
| Product Name | Power Distribution Unit | |
| Customer No. | - | |
| Model No. | PDU08-1U-V6-K1 | |
| Drawing No. | 20230922-12 | |
| Tolerance: ± 2 | Scale: | |