
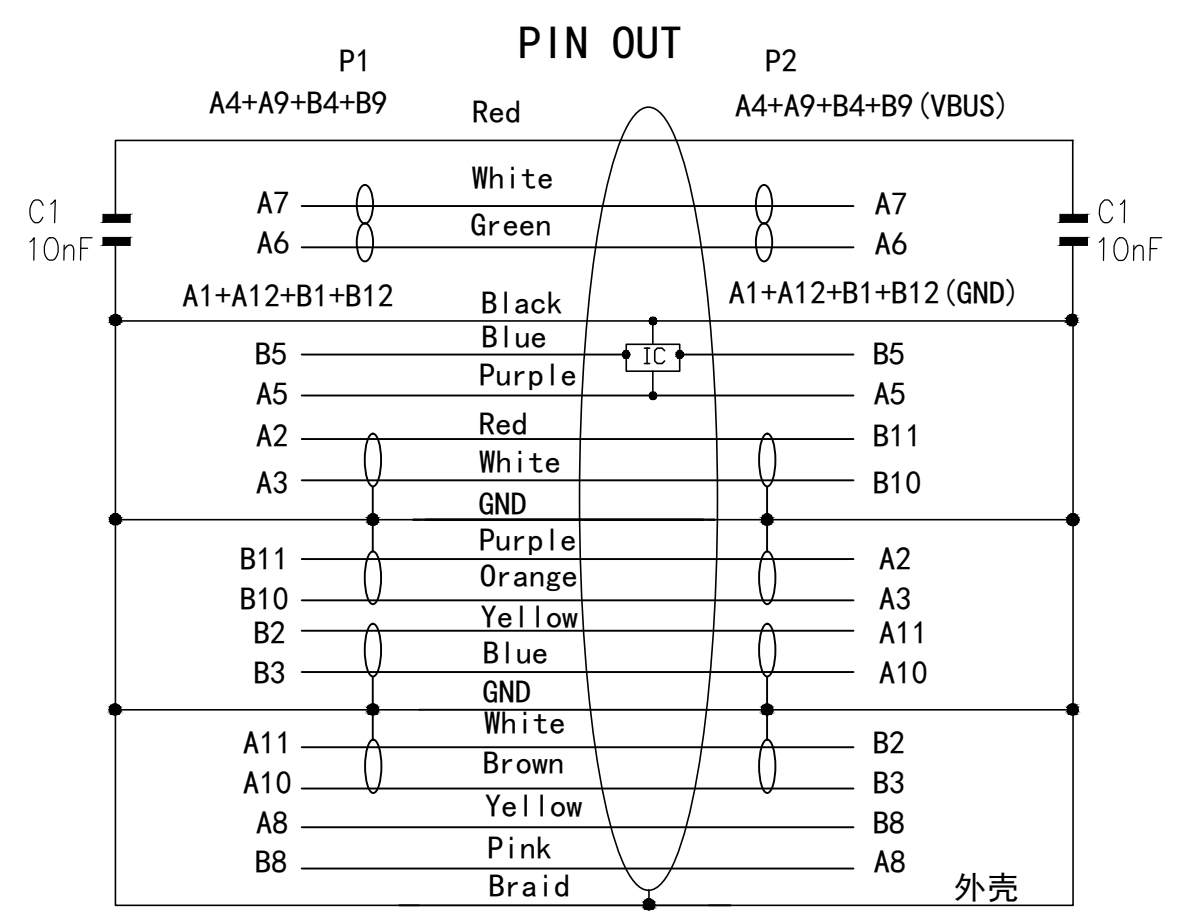


REV	MODIFICATION	DATE
A	发行	2021.02.20

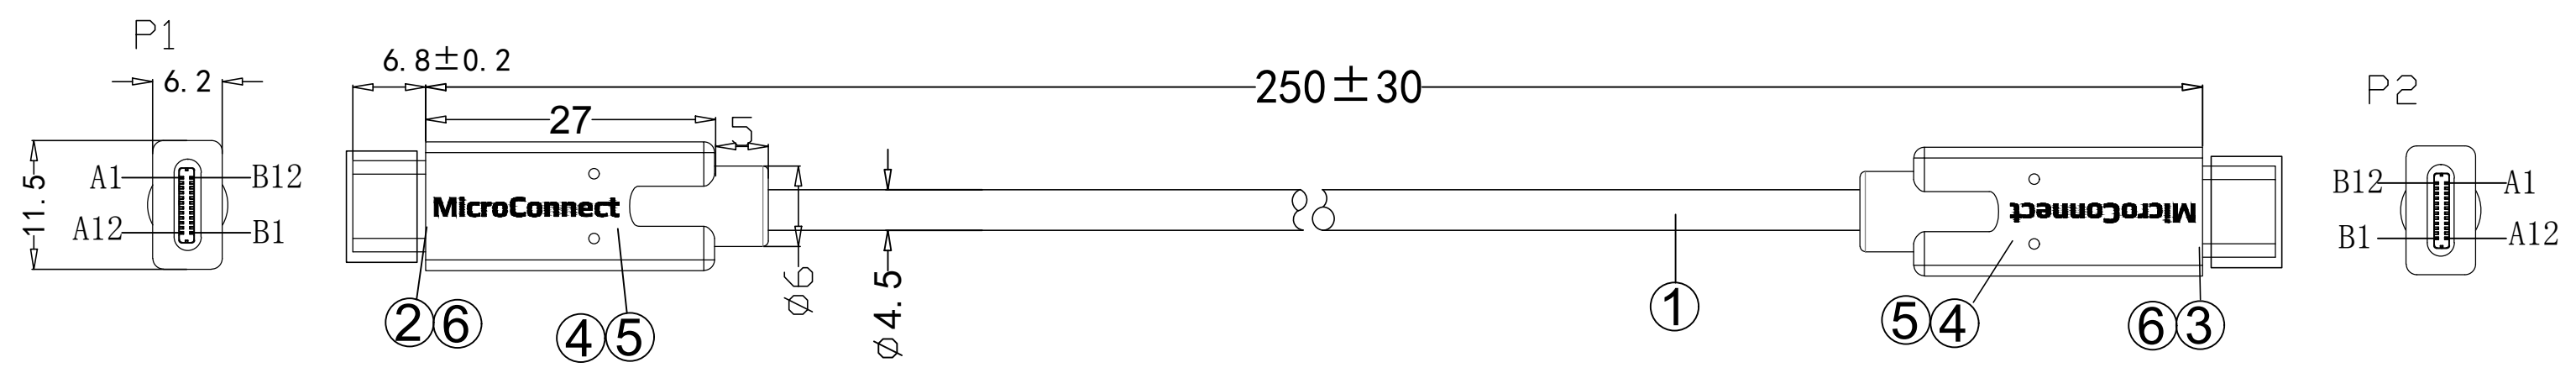

**A. Electronic Tests:**

- A. Open/Short/Intermittence: 100%
  - B. Hi-Pot: AC 100V 0.01S 1mA
  - C. Insulation Resistance: DC 100V 0.01S 5MΩ Min
  - D. Conductive Resistance: 2Ω Max
- B. USB READ WRITE TEST: (GEN2 1M): (READ) 300MB/S (min), (WRITE) 500MB/S(min);

⑥	DUST COVER	USB3.1 Male Dust Cap	2	PCS
⑤	Coppr Foil	Double Conducting Copper Foil 5u*5m	40	MM
④	MOLDED	45P Black PVC	5	G
③	CONNECTOR	USB3.1 C TYPE Male, Pin Gold Plated, Shell Nickel Plated, E-MARK(5A)+EMI Shield	1	PCS
②	CONNECTOR	USB3.1 C TYPE Male, Pin Gold Plated, Shell Nickel Plated +EMI Shield	1	PCS
①	CABLE	USB3.1 CABLE[1P*32#(7/0.08TC)+D+AL+MY] *4C+1P*32#(7/0.08TC)+4C*32#(7/0.08TC)+26#(7/0.16TC)*2C+F+AL+B(16*9/0.08TC) Black PVC Jacket OD:4.5±0.15MM Marking: E***** 兄 AWM STYLE 2725 80°C 30V VW-1 SUPER HIGH SPEED USB Revision	250	MM
NO	NAME		Q'TY	UNIT

PROJ:	TOLERANCE: XX= XXX=	PRODUCT NAME: USB3. 2CC0. 25
SCALE: NONE	REV: A	PART NO: USB3. 2CC0. 25
UNIT: MM	SHEET: 1/3	CUST: EET Group A/S
SUST APPROVED: Emil Olsen		
APPROVED:		
CHECKED:		
DRAWING: 2021.02.20		