

SRP-350V

3-inch Thermal POS Printer



Retail



Restaurants & Bars




Quick Service Restaurant



Coffee

Reliable Steady Seller

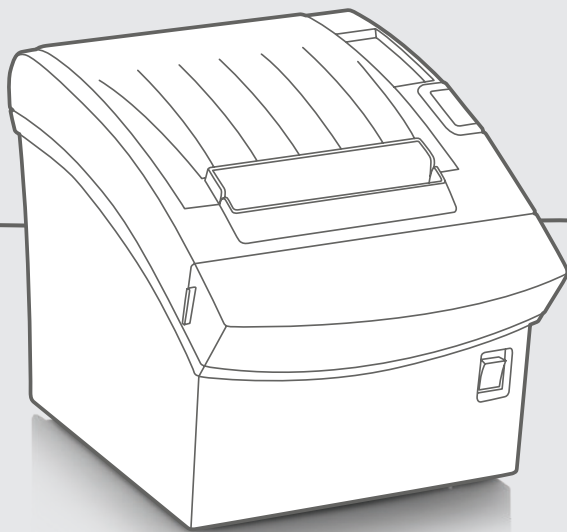

Powerful Printing Performance

- Fast printing speeds up to 300 mm/sec
- Paper saving mode, reducing the length of a receipt up to 25%
- Part of the world-class SRP-350 line
- Energy Star certified



180 dpi 203 dpi



User Convenience

- Supporting a Visibility Intelligence™ function for optimal print quality on Blue4est® paper
- Anti-jam guide
- 180 or 203 dpi options
- Optional B-melodist



Multiple Interface Choice

- Built-in USB
- Optional Serial, Parallel or Ethernet

BIXOLON

a Better Solution for your Business™

SRP-350V

3-inch Thermal POS Printer

Specifications

Print Characteristics

Print Method

Direct Thermal

Print Speed

SRP-350V: Up to 300 mm/sec
SRP-352V: Up to 270 mm/sec

Print Resolution

SRP-350V: 180 dpi
SRP-352V: 203 dpi

Print Width

Up to 72 mm

Sensor

Paper End, Paper Near End, Cover Open,
Visibility Intelligence Sensor

Media Characteristics

Media Type

Receipt

Media Width

80 mm
Optional 58 mm

Media Roll Diameter

Up to 83 mm

Media Thickness

0.05 ~ 0.08 mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (W x D x H)

145 x 204 x 146 mm
(5.70 x 8.03 x 5.74 inch)

Weight

1.6 kg (3.52 lbs.)

Electrical

EnergyStar Certified,
External Power Adaptor 100-240 V AV, 50/60 Hz

Drawer Port

2 ports (Via y-type adaptor)

Performance Characteristics

Memory

64 Mb SDRAM, 64 Mb Flash

NV Image Memory

256 Kbytes (Mono)

Receive Buffer

4 Kbytes

User Define Buffer

12 Kbytes

Interface

Standard: USB V2.0 FS
Optional: ① USB V2.0 FS + Serial
② USB V2.0 FS + Parallel
③ USB V2.0 FS + Ethernet
④ USB V2.0 FS + Dual Serial

Environment Characteristics

Temperature

Operating: 0 ~ 40 °C (32 ~ 104 °F)
Storage: -20 ~ 60 °C (-4 ~ 140 °F)

Humidity

Operating: 10 ~ 80 % RH
Storage: 10 ~ 90 % RH

Software

Emulation

BXL / POS

Driver / Utility

Windows Driver
OPOS/JPOS Driver
Linux/Mac CUPS Driver
Virtual COM USB/Ethernet Driver
Utility Program
Network Auto Installer

SDK / Plugin

Android/iOS/Windows SDK
Linux SDK
Xamarin SDK
Web Print SDK
Cordova Plugin

Application

mPrint App (Android, iOS)

Fonts / Graphics / Symbologies

Character Size

Font A: 12 x 24, Font B: 9 x 17, Font C: 9 x 24,
KOR, CHN, JPN: 24 x 24

Characters Per Line

SRP-350V: Font A: 42, Font B, C: 56,
KOR, CHN, JPN: 21

SRP-352V: Font A: 48, Font B, C: 64,
KOR, CHN, JPN: 24

Character Sets

Alphanumeric: 95
Extended Graphics: 128 x 35 page
International: 32

Graphics

Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbologies

1D: Coda Bar, Code39, Code93, Code128, EAN-8,
EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR Code

Accessories

Standard

USB A-B Cable 1.8 m

Optional

Built-in SMPS, Vertical stand, Wall mount,
Splash Proof Cover, External buzzer, B-Melodist,
Serial Cable (9-9/25-9 pin), Parallel Cable



BR_SRP-350V_EN_MAR23_V1

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON

www.BIXOLON.com

BIXOLON Co.,Ltd.

+82 31 218 5500
sales@bixolon.com

BIXOLON America Inc.

+1 858 764 4580
sales@bixolonusa.com

BIXOLON Mexico

+521 55 8852 7880
marcelo@bixolonusa.com

BIXOLON Europe GmbH

+49 211 68 78 54 0
sales@bixolon.de

BIXOLON MEA

+971 4 222 6480
russell@bixolon.com