

Hybrid NVR 16CH



Item no.: 0070-10403-A



FEATURES

- Supports AHD, TVI, CVI, CVBS, IP video inputs
- Max 24-ch IP camera inputs , each channel up to 5MP
- Up to 4K-N/5MP resolution for recording
- Support HDMI and VGA output
- Smart search and playback
- Support multiple languages
- Easy to use same Interface of GUI/WEB

OVERVIEW

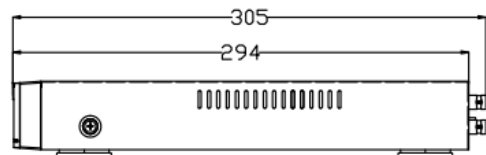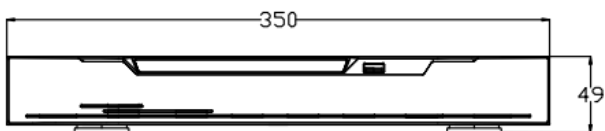

Video and Audio

Analog Video Input	16-ch BNC
AHD Input	8MP, 5MP, 4MP, 3MP, 1080P, 720P, D1
TVI Input	8MP, 5MP, 4MP, 3MP, 1080P, 720P, D1
CVI Input	8MP, 5MP, 4MP, 3MP, 1080P, 720P, D1
CVBS Input	PAL/NTSC
IP Video Input	16+8ch, each channel up to 5MP
Audio In/Out	6/1
Two-way Talk	N/A
HDMI Output	3840×2160, 1920×1080, 1280×1024, 1024×768
VGA Output	1920×1080, 1280×1024, 1024×768
CVBS Output	Support
Synchronous Playback	16/9/4/1

Recoding

Encoding Resolution	4K-N, 5MP, 4MP, 1080P, 720P, 960H, D1, CIF
Frame Rate	4K-N@8fps, 5MP@7fps, 4MP@8fps, 1080P@15fps, 720P@30fps
Video Bit Rate	Main stream: 16Kbps~4096Kbps, Sub stream: 16Kbps~1024Kbps
Dual Stream	Support

Network

Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
Protocols	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP
Remote Users	4

Hard Disk

SATA	2 SATA interfaces
Capacity	Up to 8TB capacity for each disk

Interface

Alarm In/Out	4/1
USB Interface	2 ports (USB 2.0 x 2)
RS485	Support

General

Power Supply	DC12V/4A
Power Consumption	Max 15W (without HDD)
Working Temperature	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Working Humidity	Less than 90% RH
Dimensions (W×D×H)	350 x 305 x 49 mm (13.78 × 12.01 × 1.93 inch)
Net Weight	1.8 kg (3.97 lb)