


MPN: V-6UTP-05BL

CAT6 U/UTP CCA PVC Ethernet Cable Blue 5m

The ProXtend CAT6 U/UTP CCA ethernet cables are produced with a copper-clad aluminum strands and an AWG of 26 to create a cost-effective product.

The cable is reinforced with strain relief for increased durability and latch protection allowing for secure installation.

Supporting a variety of cable standards, lengths and shieldings, ProXtend is your one stop shop for ethernet cables ensuring that you are always able to find a cable that best suits your network requirements.

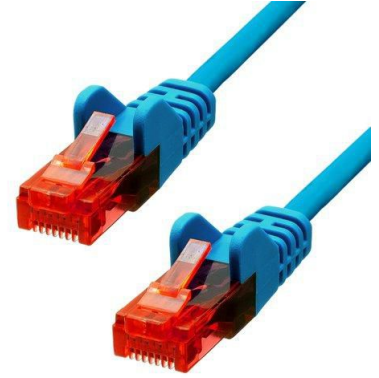

Especificaciones

| | | | |
|--------------------------|--|--|-------------|
| Certificates | Certificación | REACH | |
| Features | Blindaje de cable | U/UTP (UTP) | |
| | Cable estándar | Cat6 | |
| | Color producto | Blue | |
| | Conector 1 | RJ45 | |
| | Conector 1 género | Male | |
| | Conector 2 | RJ45 | |
| | Conector 2 género | Male | |
| | Estándares de red | IEEE 802.3af | |
| | Longitud del cable | 5 m | |
| | Material conductor | Copper-Clad Aluminium (CCA) | |
| | Material cubierta | Polyvinyl chloride (PVC) | |
| | Plug and play | Yes | |
| | Revestimiento de contactos del conector | Gold | |
| | Tamaño de cable AWG | 26 | |
| | Tecnología de cableado | 10/100/1000Base-T(X) | |
| | Tipo de conductor | Stranded | |
| | Velocidad de transferencia de datos | 1000 Mbit/s | |
| | Operational conditions | Temperatura de almacenamiento (T-T) | -15 - 60 °C |
| | | Temperatura de funcionamiento (T-T) | -10 - 60 °C |
| Packaging data | Cantidad por pack | 1 pieza(s) | |
| | Manual | No | |
| Technical details | Certificados de sostenibilidad | RoHS | |

| | | |
|--------------------------------|--------------------------------|----------|
| Technical details | Compliance certificates | RoHS |
| Vendor information | Brand Name | ProXtend |
| | Warranty | 30 Año/s |
| Weight & dimensions | Díámetro exterior | 5 mm |

Otras imágenes

