

# DATASHEET

## CRONO CPK400

### aluminium side opening housing cable managed

- side opening housing made of die-cast aluminium
- cable managed
- IP66/67 weatherproof rating
- **IK10** protection with anti-breaking glass
- integrated wiper (optional, on request)
- extremely easy installation and maintenance
- wide range of optional accessories



indoor version



safety lock

#### Side opening housing cable managed

The **CRONO CPK400** cable managed housing has been developed in order to ensure a simple mounting and maintenance of all the most common cameras, also of medium-large size, IP and megapixels, with various lenses. The housing, thanks to its built-in accessories, is ready to fit any installation requirement: analog, IP, fiber optics (ex. MediaConverter, UMTS router) etc.

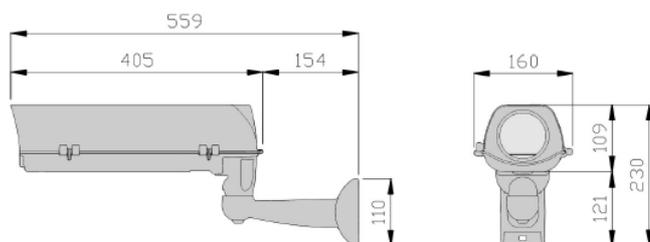
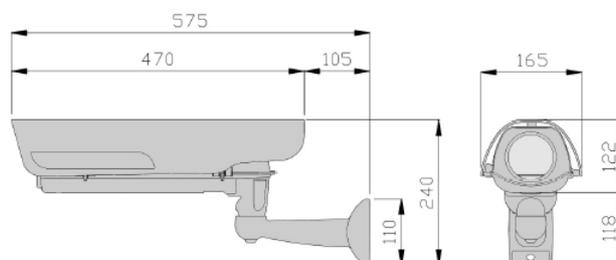
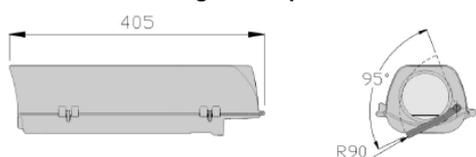
The die-cast aluminum construction provides high impact resistance and good heat dissipation toward the outside in combination with special anti-breaking glass this housing is IK10 compliant, while the side opening notably simplifies the processes of mounting and maintenance. The aluminium cable managed bracket ensures vandal resistance action and meantime good accessibility for installation and maintenance.

A wide range of optional accessories is available: double heater, anti-condensation glass, anti-tamper switch, camera power supply, built-in blower, forced-air cooling set for high temperatures, closing with safety lock on rear side.

**CRONO CPK400** is compatible with many cameras with different lenses.

# DATASHEET

## TECHNICAL DRAWINGS

**indoor version**

**outdoor version**

**integrated wiper version**


*the values are in millimeters*

## TECHNICAL DATA

### GENERAL

- Aluminium body
- UV-resistant technopolymer sunshield with wide range of adjustments.
- RAL 7035 polyester powder coating (light grey).
- Stainless steel bolts and screws.
- Side opening body with captive screws.
- Cable managed.
- Thermostatically controlled heater.
- Wide range of accessories.
- Supplied with instruction manual.
- According to RoHS compliance.

### ELECTRICAL

- thermostatically controlled heater  
available voltages: 230V, 110V, 24V, 12V  
max. power: 30W  
t on: +15°C, t off: +22°C (+/- 3°C)
- thermostatically controlled blower  
available voltages: 230V, 110V, 24V, 12V  
max. power: 2W  
t on 37°C t off 27°C +/- 3°C
- integrated wiper:  
input 230Vac 5W  
input 24Vac 5W

### MECHANICAL

- Usable internal space: 90x70mm (WxH).
- Usable length: 260mm.
- Glass window: Ø 75mm.
- IK10 protection with anti-breaking glass.
- Weatherproof rating: IP66/67.
- Weatherproof rating with forced-air cooling set: IP44.
- Operating temperature with built-in heater: -20°C to +60°C.
- Weight: 2,9 Kg. (kit version).

### ACCESSORIES

- VA400** anti-breaking glass
- VC400** anti-condensation glass
- AL400/A** 230/12Vdc 1,3A power supply
- AL400/B** 230/24Vac 500mA power supply
- AL400/C** 230/12Vdc 2,1A power supply
- RP400** double heater
- VI400** built-in blower set
- VE400** high efficiency external ventilation system
- TP400** anti-tamper switch set
- LC400** safety lock for locking the back side of the housing
- WTP5** 5l. washer tank with integrated pump, 5m/11m/19m delivery head, (three models available)
- WTP25** 25l. washer tank with integrated pump, 5m/11m/19m delivery head, (three models available)

# DATASHEET

**RELATED PRODUCTS****STS700** ceiling bracket**SP/A** pole adaptor**SA/A** corner adaptor**PA1** reinforced wall plate for poor consistency walls**PA1/SD** reinforced wall plate with junction box for poor consistency walls

model	unit weight (Kg.)	package dimensions (cm.) WxHxL	gross weight (Kg.)
CRONO CPK400	2,9	21,0 x 18,8 x 50,0	3,20