


Vertiv PSA6-1600IT-SCH sistema de alimentación ininterrumpida (UPS) Línea interactiva 1,6 kVA 1000 W 6 salidas AC

Marca : Vertiv

Código del producto: PSA6-1600IT-SCH

Nombre del producto : PSA6-1600IT-SCH

Vertiv PSA6-1600IT-SCH. Topología UPS: Línea interactiva, Capacidad de potencia de salida (VA): 1,6 kVA, Potencia de salida: 1000 W. Conector: C14 acoplador, Cantidad de salidas AC: 6 salidas AC. Tecnología de batería: Sealed Lead Acid (VRLA), Tiempo típico de respaldo a carga completa: 2 min, Tiempo típico de respaldo a media carga: 10 min. Factor de forma: Torre, Color del producto: Negro, Longitud de cable: 1,8 m. Certificados de conformidad: CB, CE, EAC, RCM, REACH, RoHS, UKCA, WEEE

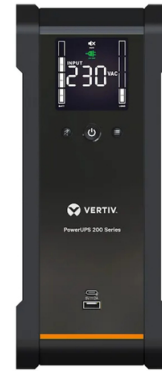

Características		Batería	
Topología UPS *	Línea interactiva	Tiempo típico de respaldo a media carga	10 min
Capacidad de potencia de salida (VA) *	1,6 kVA	Diseño	
Potencia de salida *	1000 W	Factor de forma *	Torre
Forma de onda *	Seno	Longitud de cable	1,8 m
Voltaje de entrada de operación (min) *	140 V	Color del producto *	Negro
Voltaje de entrada de operación (max) *	290 V	Tipo de visualizador	LCD
Frecuencia de entrada *	50/60 Hz	Condiciones ambientales	
Voltaje de operación de salida (min)	195 V	Intervalo de temperatura operativa	0 - 40 °C
Voltaje de operación de salida (max)	255 V	Intervalo de temperatura de almacenaje	-20 - 40 °C
Frecuencia de salida	50/60 Hz	Intervalo de humedad relativa para funcionamiento	0 - 90%
Índice de aumento de energía	600 J	Altitud de funcionamiento	0 - 3000 m
Eficiencia	95%	Altitud no operativa	0 - 3000 m
Protección de sobrecarga	✓	Aprobaciones reguladoras	
Funciones de protección de poder	Sobreintensidad, Sobrecarga, Sobrecarga, Cortocircuito	Certificados de conformidad	CB, CE, EAC, RCM, REACH, RoHS, UKCA, WEEE
Puertos e Interfaces		Peso y dimensiones	
Conector	C14 acoplador	Ancho	120 mm
Cantidad de salidas AC	6 salidas AC	Profundidad	430 mm
Batería		Altura	290 mm
Tecnología de batería	Sealed Lead Acid (VRLA)	Peso	11,8 kg
Tiempo típico de respaldo a carga completa	2 min	Empaquetado	
		Ancho del paquete	215 mm
		Profundidad del paquete	510 mm
		Altura del paquete	370 mm
		Peso del paquete	14 kg



0767041045123



767041045123

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.