

ZYXEL

Zyxel USGFLEX50HP-EU0102F cortafuegos (hardware) 0,35 Gbit/s

Marca : Zyxel


Código del producto: USGFLEX50HP-EU0102F

Nombre del producto : USGFLEX50HP-EU0102F

Zyxel USGFLEX50HP-EU0102F. Rendimiento del cortafuegos: 0,35 Gbit/s, Rendimiento de VPN: 0,09 Gbit/s. Disipación del calor: 40,92 BTU/h, Usuarios concurrentes: 15 usuario(s), Tiempo medio entre fallos: 655130 h. Protocolos de gestión: SNMP v1, v2c, v3. Ethernet LAN, velocidad de transferencia de datos: 10,100,1000 Mbit/s, Conexión WAN: Ethernet (RJ-45). Corriente de entrada: 2 A, Voltaje de entrada DC: 12 V, Consumo de energía (max): 12 W



Transmisión de datos		Diseño	
Rendimiento del cortafuegos *	0,35 Gbit/s	Ventilador integrado	✗
Rendimiento de VPN	0,09 Gbit/s	Control de energía	
Número máximo de conexiones de firewall	20000	Corriente de entrada	2 A
Desempeño		Voltaje de entrada DC	12 V
Procesador incorporado	✗	Consumo de energía (max)	12 W
Disipación del calor	40,92 BTU/h	Aprobaciones reguladoras	
Usuarios concurrentes	15 usuario(s)	Certificación	FCC Part 15 (Class B), IC, CE EMC (Class B), RCM, BSMI
Syslog	✓	Condiciones ambientales	
Tiempo medio entre fallos	655130 h	Intervalo de temperatura operativa	0 - 40 °C
Conexión		Intervalo de temperatura de almacenaje	-30 - 70 °C
Wifi	✗	Intervalo de humedad relativa para funcionamiento	10 - 90%
Conexiones simultáneas VPN/SSL (máximo)	15	Intervalo de humedad relativa durante almacenaje	10 - 90%
VPN, cantidad de túneles	10	Peso y dimensiones	
Seguridad		Ancho	216 mm
Protección DDoS	✓	Profundidad	143 mm
Seguridad con cortafuegos	✓	Altura	33 mm
Protocolos		Peso	880 g
Protocolos de gestión	SNMP v1, v2c, v3	Empaquetado	
Características de administración		Ancho del paquete	276 mm
Indicadores LED	✓	Altura del paquete	185 mm
Administración basada en web	✓	Profundidad del paquete	98 mm
Filtro de URL	✓	Peso del paquete	1,41 kg
Puertos e Interfaces		Contenido del embalaje	
Ethernet LAN, velocidad de transferencia de datos	10,100,1000 Mbit/s	Cables incluidos	LAN (RJ-45)
Conexión WAN	Ethernet (RJ-45)		
Enchufe de entrada de CC	✓		

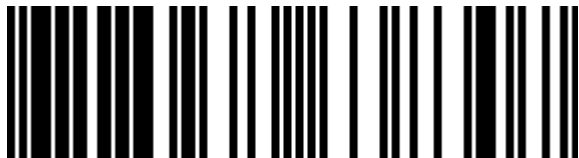

4718937638307

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.