


7 6 5 4 3 2 1

ECN NO.	REV	DESCRIPTION	DATE	REVISER	APPROVED
---------	-----	-------------	------	---------	----------

L(30000±20)

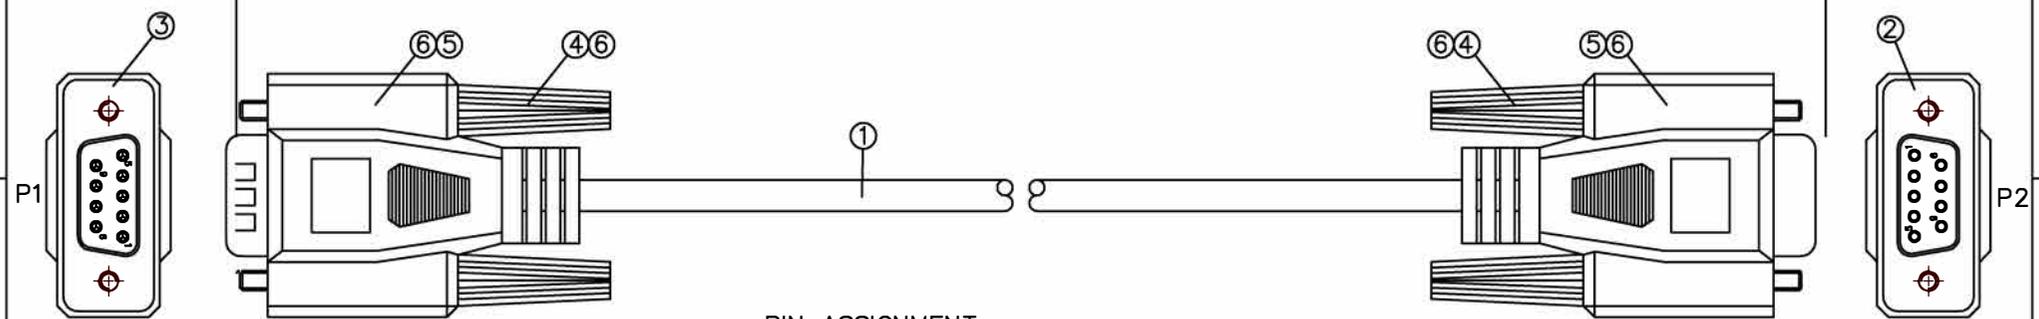

PIN ASSIGNMENT:

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
SHELL	SHELL

ELECTRICAL CHARACTER:
1.100% OPEN & SHORT TESTING.

				GENERAL TOLERANCES (UNLESS SPECIFIED)		CUST PART NO.:				
6	PVC: BEIGE WHITE.	g	15	.XXX: ±0.15	ANGULAR: ±3°	DESIGN: ERIC				
5	PE: LD-PE.	g	8	.XX: ±0.25		CHECKED: ERIC		TITLE: DB 9P F TO DB 9P M		
4	SCREW: #4-40UNC SCREW, NICKEL PLATED.	PCS	4	.X: ±0.50		APPROVED:		CABLE PART NO.: SCSEHN30		REV:A
3	CONN: DB 9P M, CONTACT: TIN PLATED, SHELL: NICKEL PLATED, BLUE INSULATOR.	PCS	1							
2	CONN: DB 9P F, CONTACT: TIN PLATED, SHELL: NICKEL PLATED, BLUE INSULATOR.	PCS	1							
1	CABLE: 9C+1/28AWG, OD: 4.8mm, PVC JACKET, BEIGE WHITE.	mm	SEE TABLE	SIZE A4	DATE: 2023.01.30	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO LUSHENG COMPANY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
ITEM	DESCRIPTION	UNIT	QT'Y		SHEET NO.: 1 OF 1					

7 6 5 4 3 2 1