

x.±0.3	x.'±	
.x±0.2	.x'±	
.xx±0.1	.xx'±	
.xxx±0.05	.xxx'±	




Physical Characteristics

Body Material Housing: PC
 Body: zinc die-casting

Jack Contact phosphor bronze, 6-50μ inch gold plated over nickel

IDC Contacts 100μ inch nickel plated over phosphor bronze

PCB FR-4 ,UL94V-0

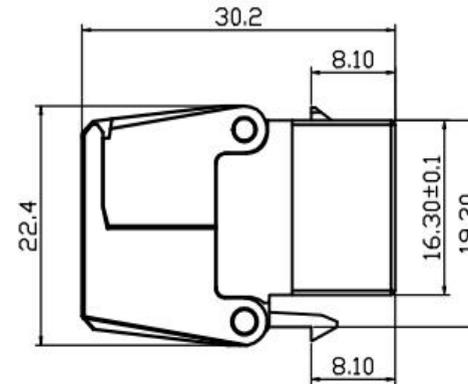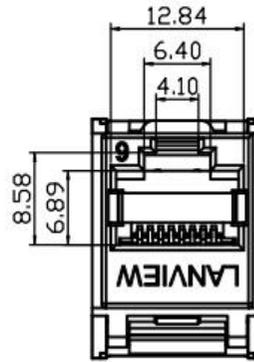

Electrical Characteristics

Dielectric Strength 1000V RMS for 1min

Current Rating 1.5Amp Max.

Insulation Resistance 10MΩ Min.




Contact Resistance 2mΩ per contact

Temperature Range -10°C to 60°C

Humidity 10%~90%; non condensing

Insertion Life >2000 mating cycles

IDC Accept 22-26 AWG Solid Cable

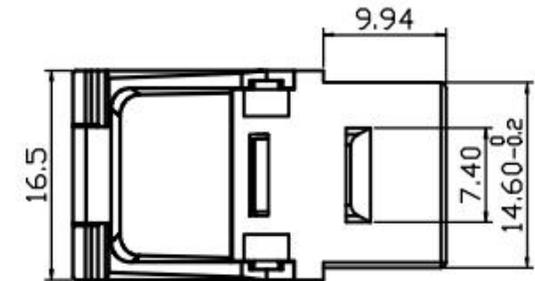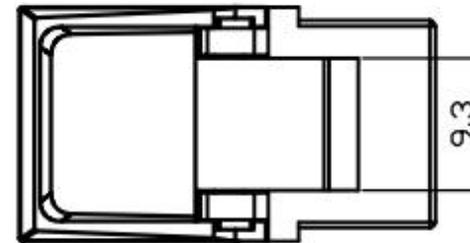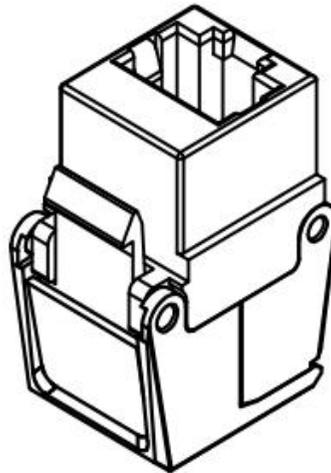

Applications

1000BASE-T Gigabit Ethernet

100BASE-TX Fast Ethernet.

10BASE-T Ethernet.

Voice, Video and other applications.

All the products are verified to the electrical characteristics required in the directive.

Yuyao Simante Network Communication Equipment Co.,LTD		
MATERIAL: PC		P/N: LVN128082 (SMT-1049T8C6-SFTP)
APPROVED:WGQ	DATE:	FTP flip jack C6 keystone
CHECKED: JIN LIANG	DATE:	MPN: LVN128082, Lanview
DESIGN: JIN YU LIANG	DATE:	Our Item N W125941378
SCALE: 1:3	PAGE:1/1	REV:A