

DS-KB8113-IME1


Vandal-Resistant Doorbell



Key Feature

- Call the mobile APP directly
- Remote unlocking via the indoor station or the mobile APP
- 2MP HD Camera with IR supplement
- Standard PoE
- Noise suppression and echo cancellation
- Configuration remotely via Web

Physical Interface

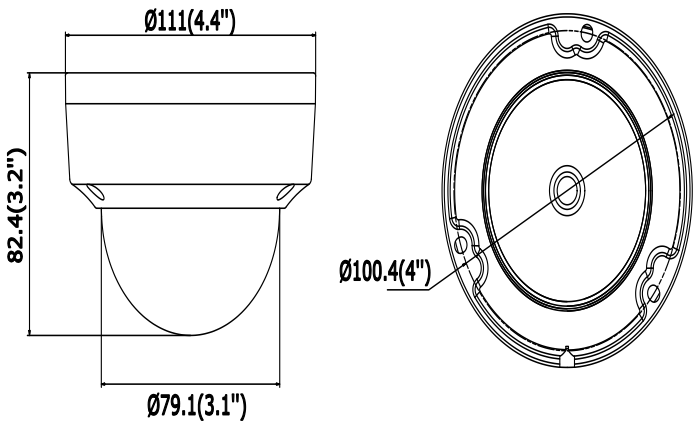

| No. | Description                       |
|-----|-----------------------------------|
| 1   | Microphone                        |
| 2   | Built-in Camera                   |
| 3   | Low Illumination Supplement Light |
| 4   | Call Button                       |
| 5   | Loudspeaker                       |

Specification


| Video parameters           |                                         |
|----------------------------|-----------------------------------------|
| Video compression standard | H.264                                   |
| Audio parameters           |                                         |
| Audio input                | Built-in omnidirectional microphone     |
| Audio output               | Built-in loudspeaker                    |
| Audio compression bitrate  | 64 Kbps                                 |
| Audio quality              | Noise suppression and echo cancellation |
| Network parameters         |                                         |
| Ethernet                   | PoE, 10/100 Mbps self-adapted           |
| Network protocol           | TCP/IP, RSTP                            |
| Device interfaces          |                                         |
| Alarm input                | 1                                       |

|                          |                                                                                                                                                                                          |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging port           | 1                                                                                                                                                                                        |
| <b>General</b>           |                                                                                                                                                                                          |
| Power supply             | IEEE802.3af, standard PoE<br>12 VDC                                                                                                                                                      |
| Power consumption        | < 10 W                                                                                                                                                                                   |
| Working temperature      | -30° C to +50° C (-22° F to 122° F)                                                                                                                                                      |
| Working humidity         | 10% to 90%                                                                                                                                                                               |
| Impact protection        | IK 09                                                                                                                                                                                    |
| Ingress protection level | IP 65                                                                                                                                                                                    |
| Dimensions (L x W x H)   | 161.85 mm × 74.13 mm × 53.2 mm (6.37" × 2.92" × 2.09")                                                                                                                                   |
| Installation             | Surface mounting                                                                                                                                                                         |
| Language                 | English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian |

## Available Model

DS-KB8113-IME1(海外标配),DS-KB8113-IME1(海外中性),DS-KB8113-IME1(海外标配)/HIKVISION USA INC,DS-KB8113-IME1(海外标配)/OSOO VIP,DS-KB8113-IME1(海外标配)DS-KIS606/套包专用,DS-KB8113-IME1(海外标配)/巴西,

## Dimension

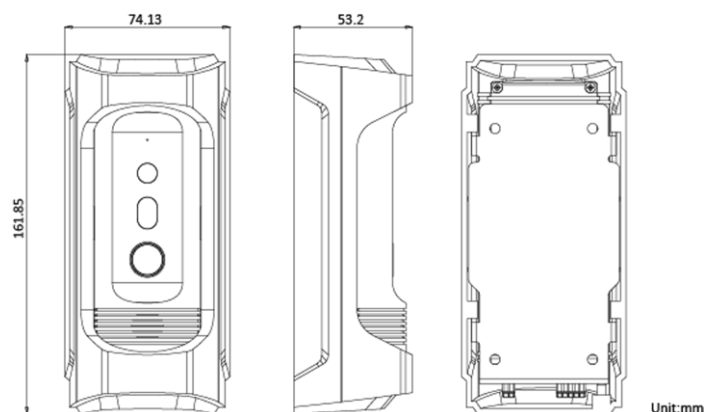

#### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.

