

## KUBIKA K6700 Bisagra aplicable en puertas de interior y puertas enrasadas

Hinge suitable for interior doors, flush doors

Krona  
Koblenz



ZINC  
ALLOY

Sin mano

REGULABLE  
3R

180°



mín 40mm.

Ø16mm

RESISTENCIA  
A LA CORROSIÓN

EN 1634-1  
30min

K=Max  
5,5mm.

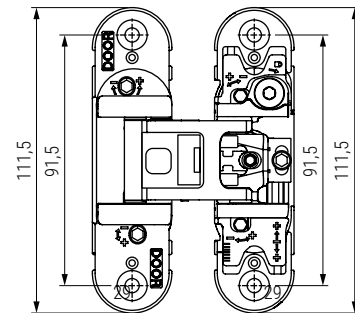

PUERTA  
DOOR

JAMBA  
JAMB



Instrucciones de montaje  
Assembly Instructions



Vídeo de montaje  
Assembly video

- Bisagra de 5 pivotes regulables a través de 3 ejes:
  - Horizontal +3 -2 mm.
  - Vertical ±3 mm.
  - Plano ± 1 mm.
- Las regulaciones se deben efectuar en todas las bisagras de la puerta.
- Bujes antidesgaste sin necesidad de lubricación ni mantenimiento.
- Ideal para marcos de madera, acero y aluminio.
- Tapas de aluminio.
- Testado con cierrapuertas.

- Hinge with 5 adjustable pivots on 3 axes:
  - Horizontal +3 -2 mm.
  - Vertical ±3 mm.
  - Plane ± 1 mm.
- The adjustments must be made on all door hinges.
- Anti-wear bushings without the need for lubrication or maintenance.
- Ideal for wood, steel and aluminum frames.
- Aluminum covers.
- Tested with door closer.

Código  
Code

Material

Acabado  
Finish



797.103

zamak/zinc alloy

chromo sat/satin chrome

3/27