

DS-KD-M/E Card Reader Module



The DS-KD-M/E Card Reader Module can be installed with the DS-KD8003-IME1 Video Intercom Module Door Station and other Hikvision video intercom module products.

It can unlock doors via the swiping of EM or Mifare card, and allows for the issuance of new cards.

Available Models:


DS-KD-M
DS-KD-E

- Door Unlock Via Card Swiping
- Backlight Compensation
- Supports the Issuance of New Card

Specifications

	DS-KD-M	DS-KD-E
System Parameters		
Processor	Embedded MCU processor	
Internal Card Reader	Built-In card reader	
Interfaces		
Module-Connecting	2 (1 input, 1 output)	
General		
Card Type	Mifare card	EM card
DIP Switch	8	
Power Input	12 VDC: powered by another module	
Power Output	12 VDC: powers another module	
Power Consumption	≤2 W	
Working Temperature	-40° F to 140° F (-40° C to 60° C)	
Working Humidity	10% to 95%	
IP Protection Level	IP65	
Installation	Flush and surface mounts	
Dimensions (L x W x H)	3.87" x 3.95" x 1.33" (98.21 mm x 100.21 mm x 33.7 mm)	

Appearance and Interface

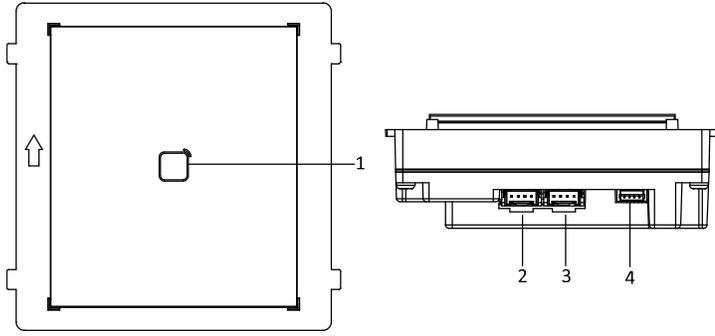

Number	Description
1	Card Reading Area
2	Output
3	Input
4	Debug Port

Typical Application

