


MPN: FO-SCSCOM2D-010

## SC-SC UPC OM2 Duplex MM Fibre Cable 10M

When engineering a high speed and bandwidth heavy network over long distances, there is no doubt that a fiber optic cable network is the most efficient and cost-effective choice.

The ProXtend fiber optic patch cable range supports full duplex singlemode and multimode communication through cables with a transparent glass core, that are coated in a LSZH jacket and able to withstand temperatures from -20 up to 70 degrees Celsius.

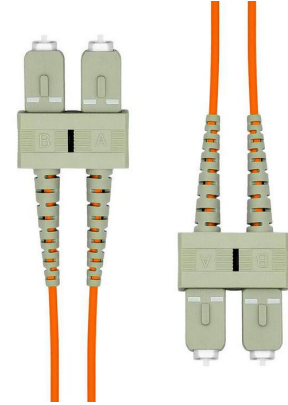

### Especificaciones

|                    |                                     |                                     |             |
|--------------------|-------------------------------------|-------------------------------------|-------------|
| Features           | Color producto                      | Orange                              |             |
|                    | Conector 1                          | SC                                  |             |
|                    | Conector 1 género                   | Male                                |             |
|                    | Conector 2                          | SC                                  |             |
|                    | Conector 2 género                   | Male                                |             |
|                    | Diámetro del núcleo                 | 50 µm                               |             |
|                    | Diámetro del revestimiento          | 125 µm                              |             |
|                    | Estructura modo fibra               | Multi-mode                          |             |
|                    | Full duplex                         | Yes                                 |             |
|                    | Género del conector                 | Male                                |             |
|                    | Longitud del cable                  | 10 m                                |             |
|                    | Material cubierta                   | Low smoke zero halogen (LSZH)       |             |
|                    | Pérdida de devolución               | 55 dB                               |             |
|                    | Pérdida de inserción                | 30 dB                               |             |
|                    | Plug and play                       | Yes                                 |             |
|                    | Tipo de fibra óptica                | OM2                                 |             |
|                    | Tipo de pulido de conector          | UPC                                 |             |
|                    | Velocidad de transferencia de datos | 2 Gbit/s                            |             |
|                    | Operational conditions              | Temperatura de funcionamiento (T-T) | -20 - 70 °C |
|                    | Packaging data                      | Cantidad por pack                   | 1 pieza(s)  |
| Technical details  | Certificados de sostenibilidad      | RoHS                                |             |
|                    | Compliance certificates             | RoHS                                |             |
| Vendor information | Brand Name                          | ProXtend                            |             |
|                    | Warranty                            | 30 Año/s                            |             |

Weight & dimensions

|                    |      |
|--------------------|------|
| Díámetro del cable | 2 mm |
| Radio de curvatura | 5 cm |

## Otras imágenes

