





Compliance with Standards: TS EN 61587-1 / TS EN IEC 62208 / IEC 60917 / IEC 60297




FRONT DOOR OPENING ANGLE: 110°

MATERIAL: 1.2 mm Steel / Powder Coating RAL7035 / 9005			
Load Capacity: 2000kg			
DIMENSIONS			
SIZE	W	H	D
RDL12U66	600	710	600
RDL16U66	600	887	600
RDL20U66	600	1065	600
RDL22U66	600	1154	600
RDL26U66	600	1332	600
RDL32U66	600	1599	600
RDL36U66	600	1776	600
RDL40U66	600	1954	600
RDL42U66	600	2043	600
RDL46U66	600	2221	600

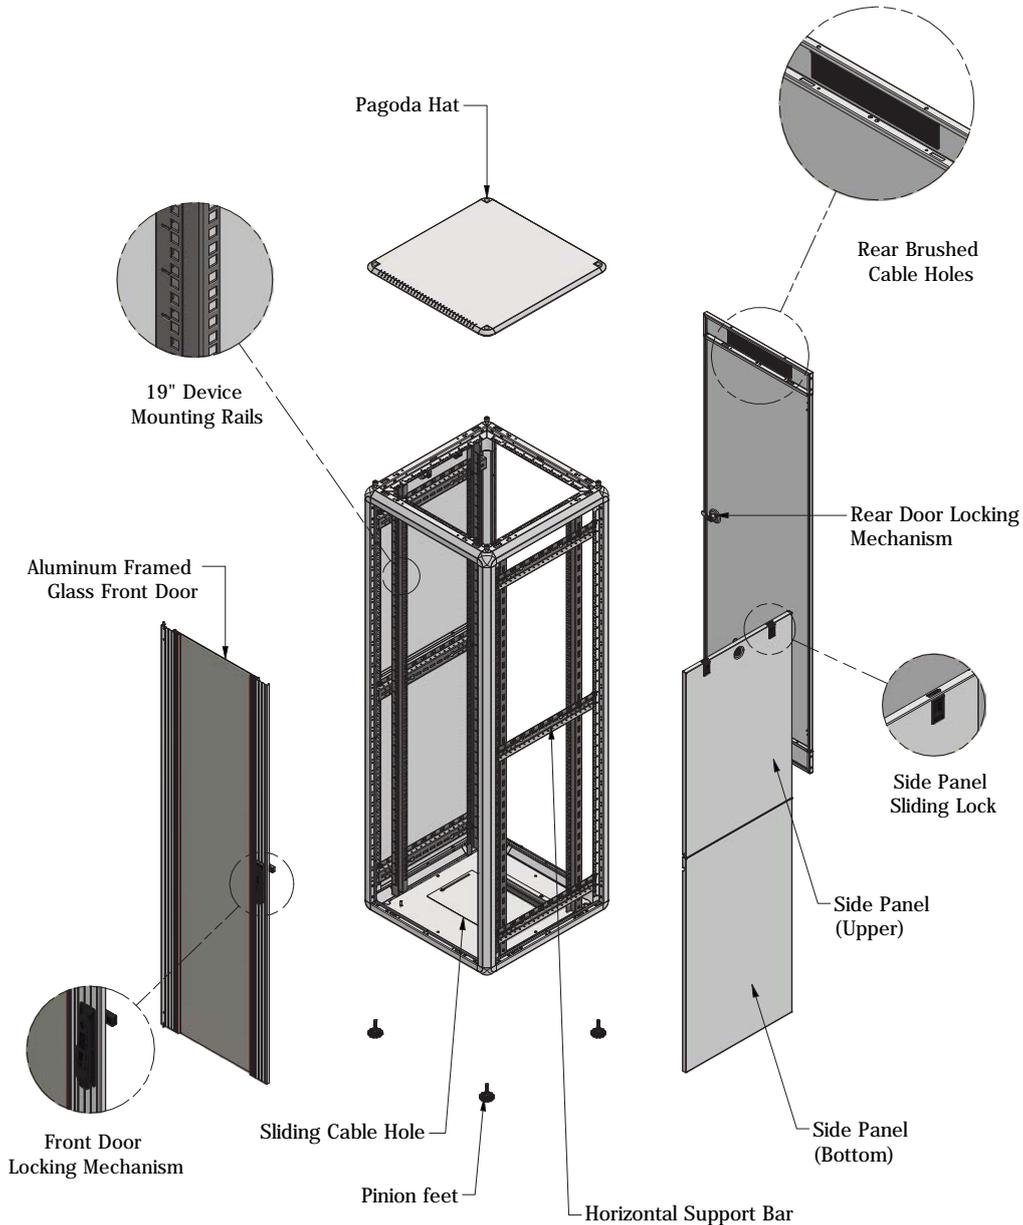


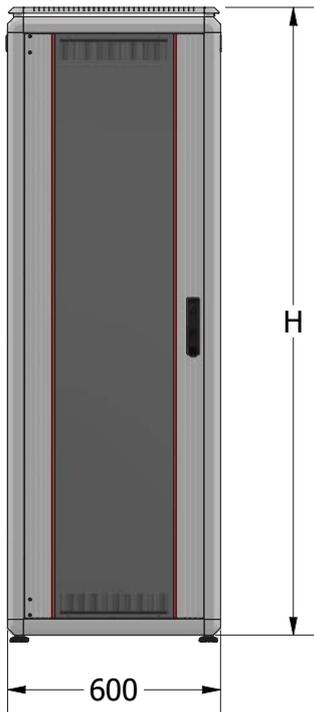


Front View

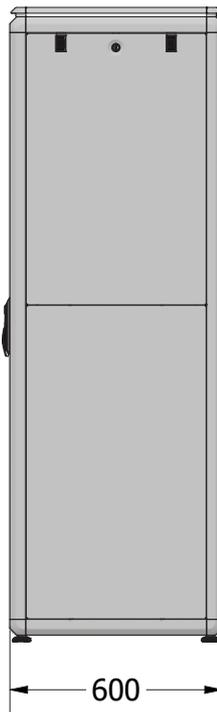


Side View

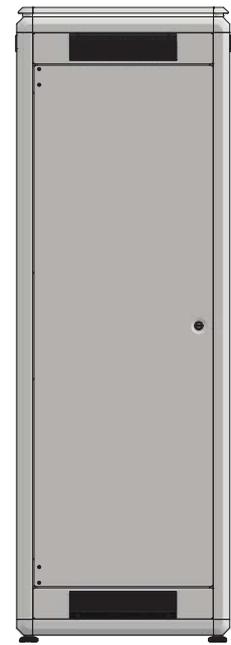


Rear View




Top View

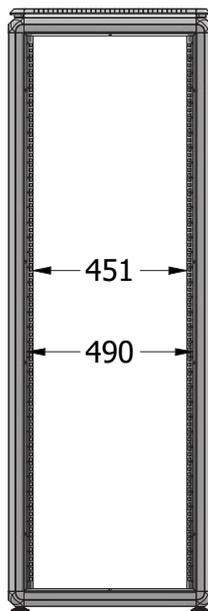

Front View

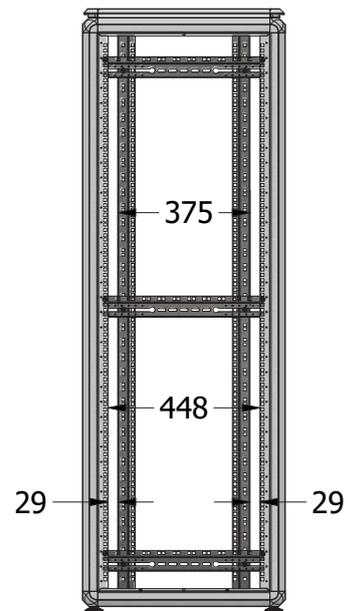

Side View



Bottom View





Compliance with Standards: TS EN 61587-1 / TS EN IEC 62208 / IEC 60917 / IEC 60297




FRONT DOOR OPENING ANGLE: 110°

MATERIAL: 1.2 mm Steel / Powder Coating RAL 7035 / 9005			
Load Capacity: 2000kg			
DIMENSIONS			
SIZE	W	H	D
RDL12U68	600	710	800
RDL16U68	600	887	800
RDL20U68	600	1065	800
RDL22U68	600	1154	800
RDL26U68	600	1332	800
RDL32U68	600	1599	800
RDL36U68	600	1776	800
RDL40U68	600	1954	800
RDL42U68	600	2043	800
RDL46U68	600	2221	800

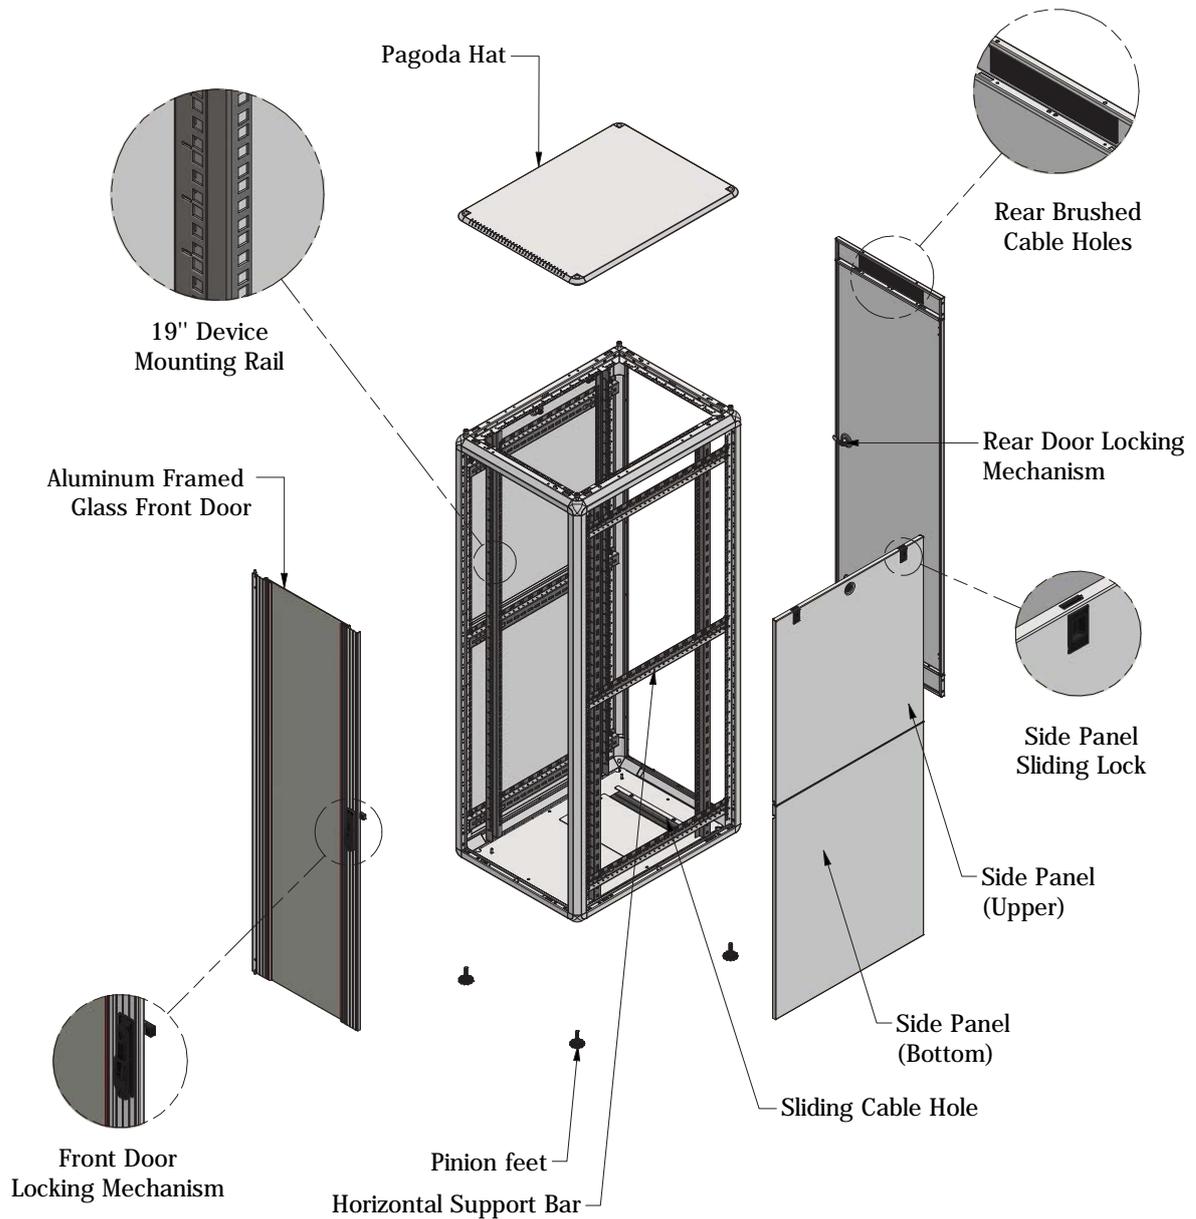


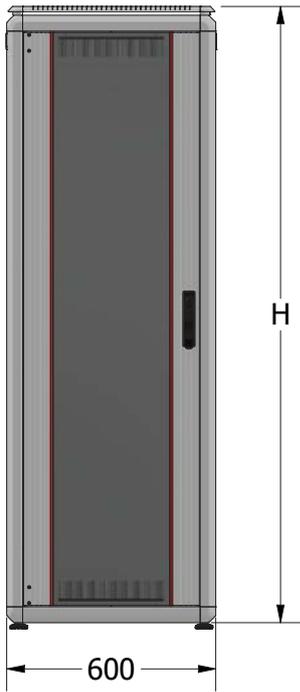


Front View

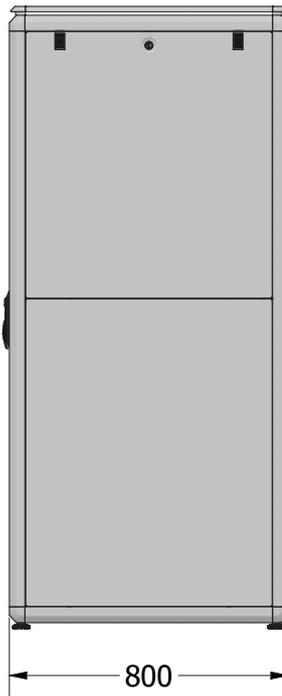


Side View

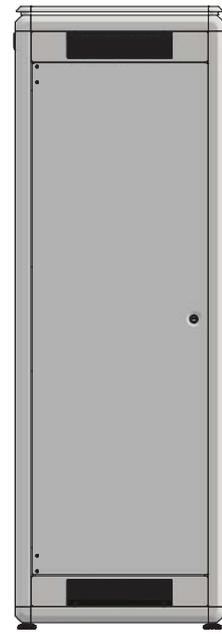


Rear View




Top View



Bottom View

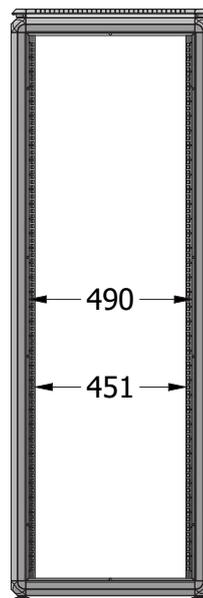

Front View

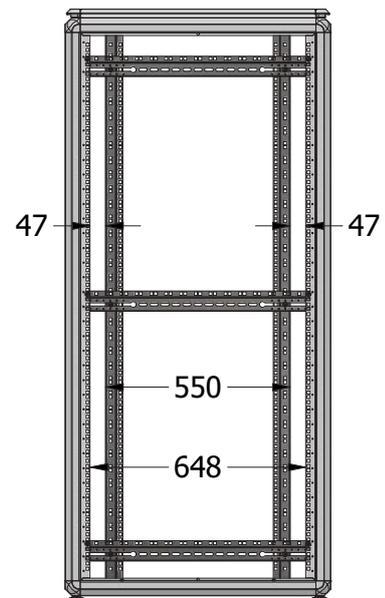

Side View








Compliance with Standards: TS EN 61587-1 / TS EN IEC 62208 / IEC 60917 / IEC 60297




FRONT DOOR OPENING ANGLE: 110°

MATERIAL: 1.2 mm Steel / Powder Coating RAL7035 / 9005			
Load Capacity: 2000kg			
DIMENSIONS			
SIZE	W	H	D
RDL22U61	600	1154	1000
RDL26U61	600	1332	1000
RDL32U61	600	1599	1000
RDL36U61	600	1776	1000
RDL40U61	600	1954	1000
RDL42U61	600	2043	1000
RDL46U61	600	2221	1000

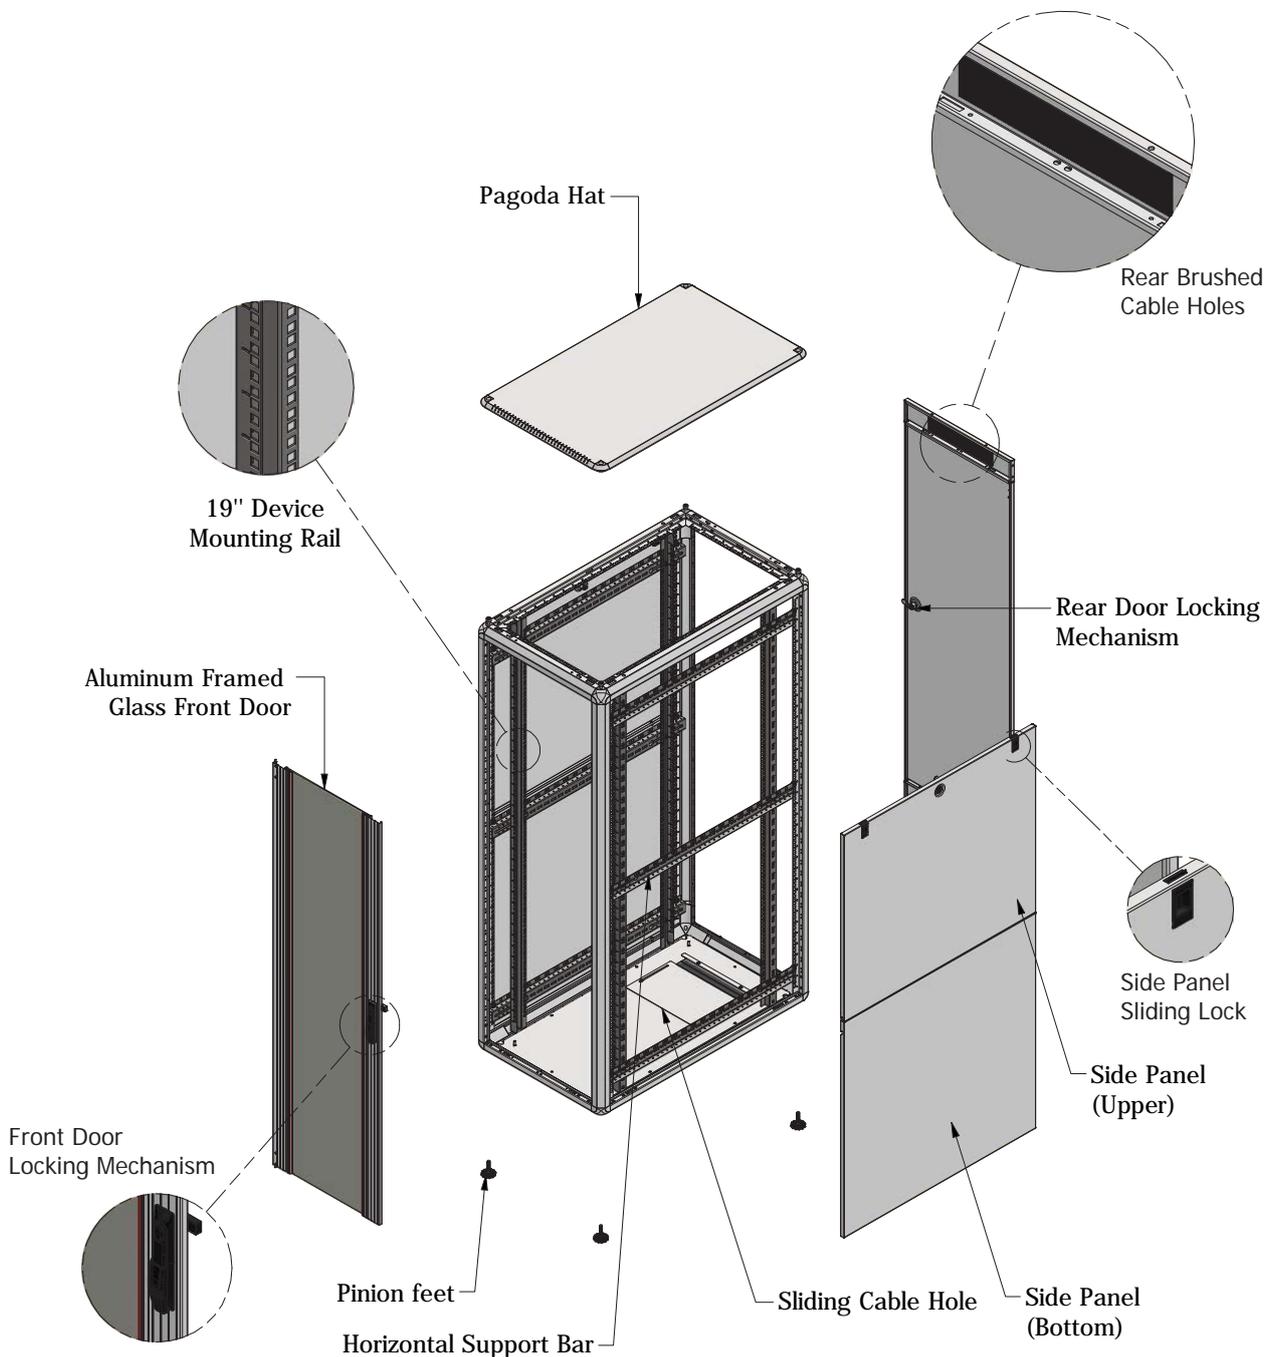


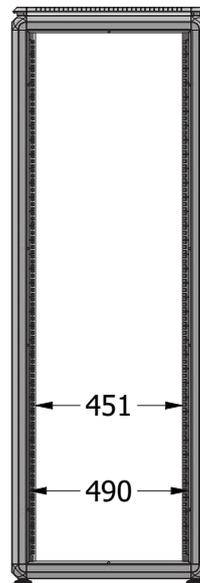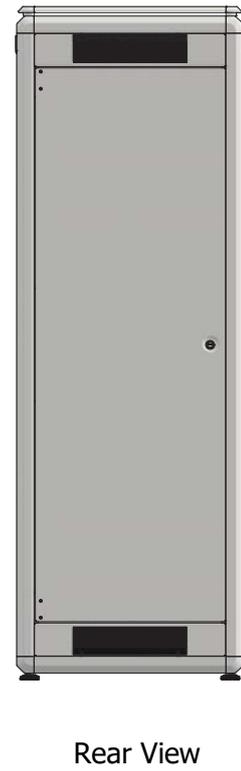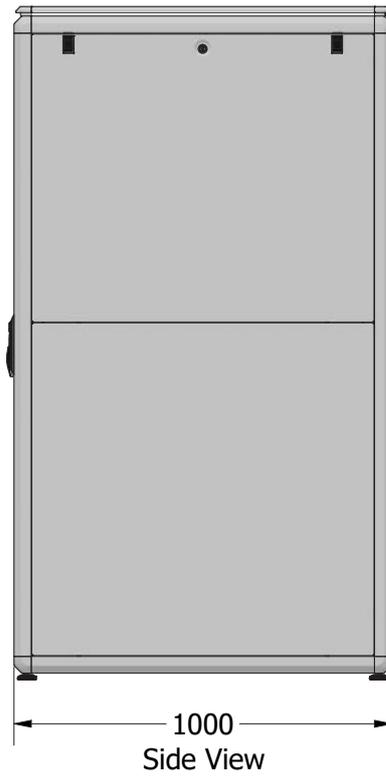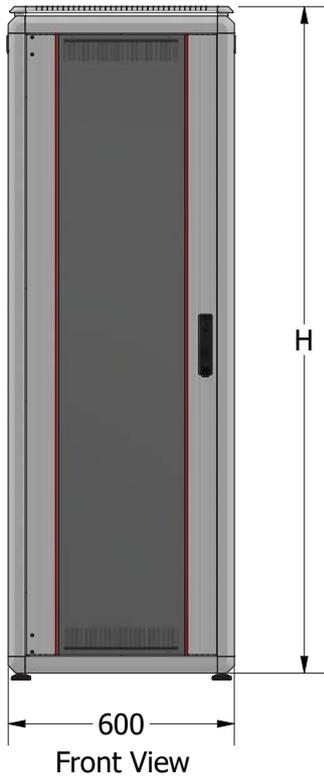


Front View

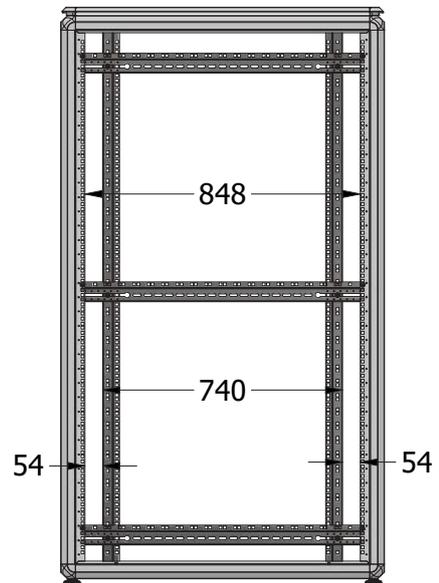

Side View

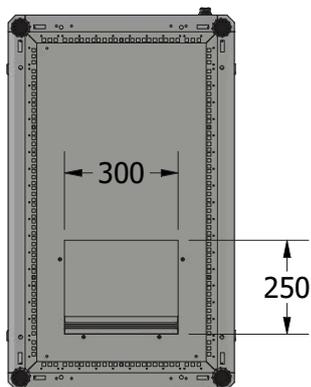

Bottom View

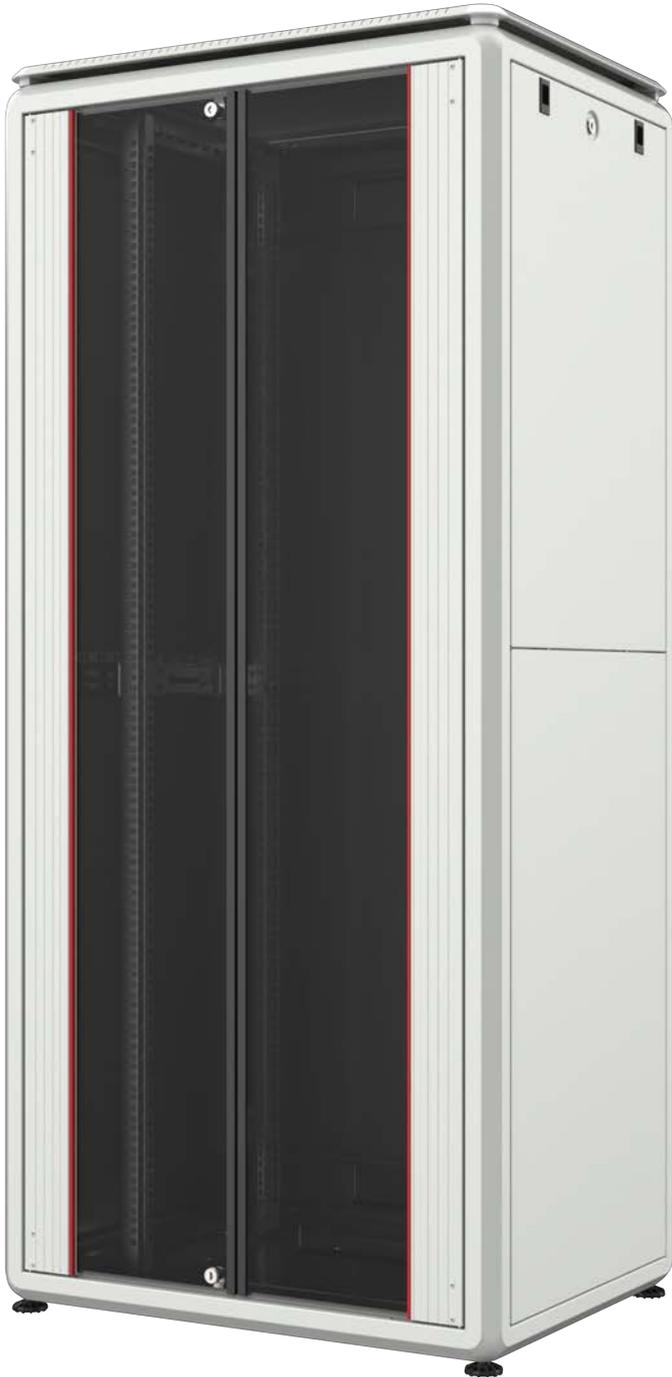



Compliance with Standards: TS EN 61587-1 / TS EN IEC 62208 / IEC 60917 / IEC 60297




FRONT DOOR OPENING ANGLE: 110°

MATERIAL: 1.2 mm Steel / Powder Coating RAL7035 / 9005			
Load Capacity: 2000kg			
DIMENSIONS			
SIZE	W	H	D
RDL22U86	800	1154	600
RDL26U86	800	1332	600
RDL32U86	800	1599	600
RDL36U86	800	1776	600
RDL40U86	800	1954	600
RDL42U86	800	2043	600
RDL46U86	800	2221	600

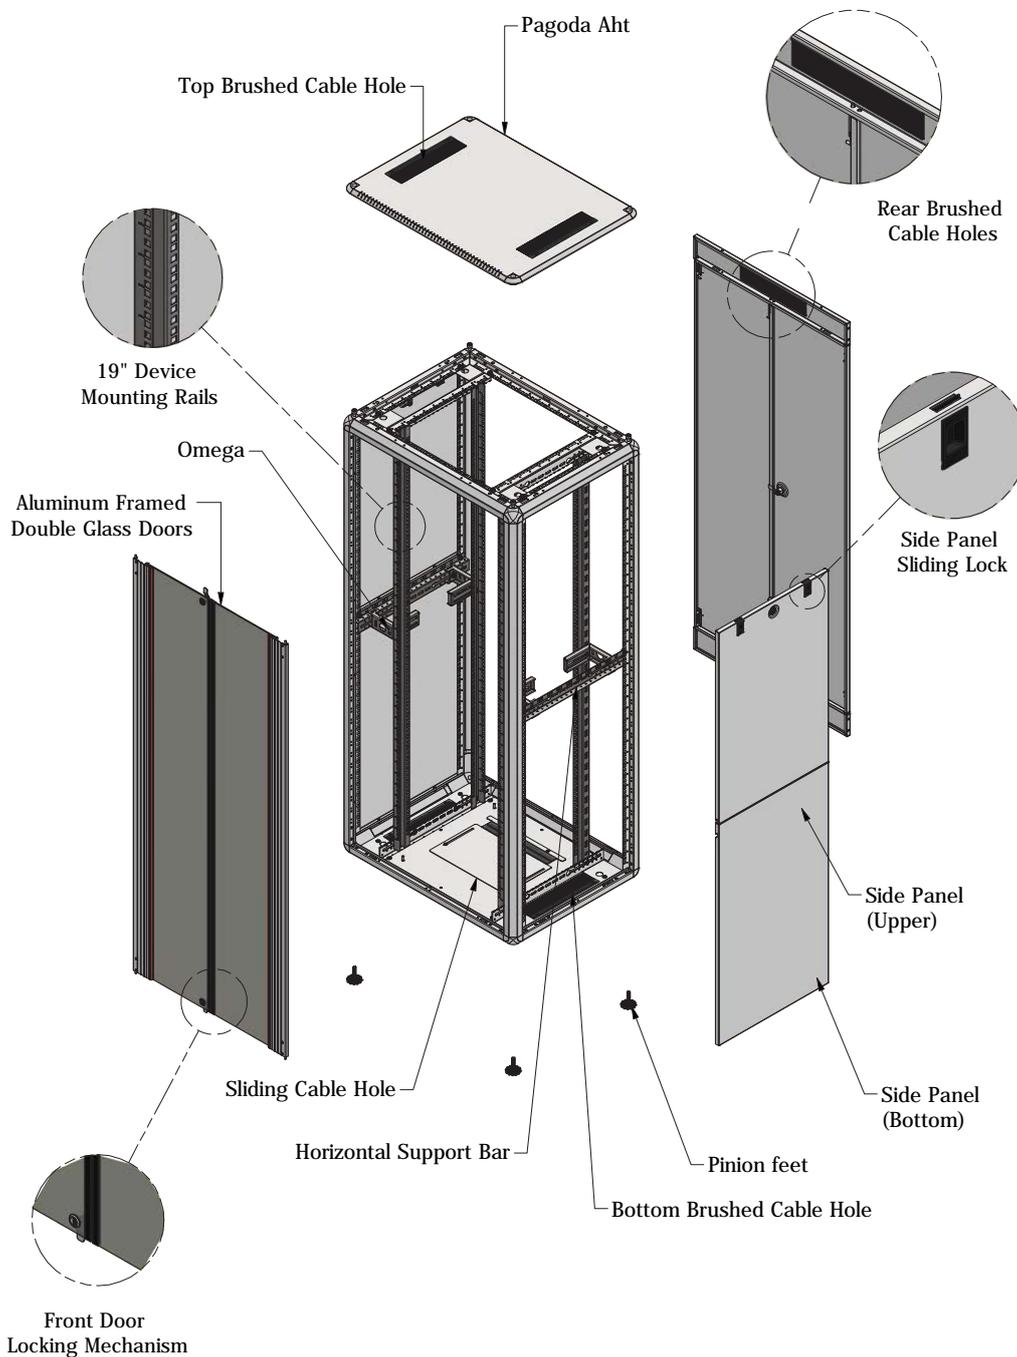

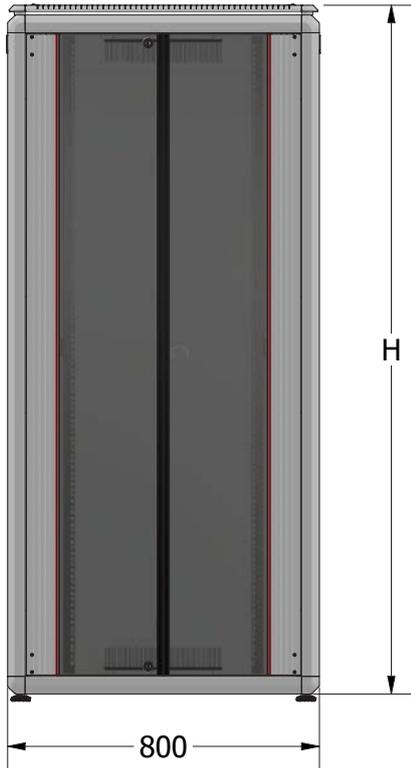


Front View

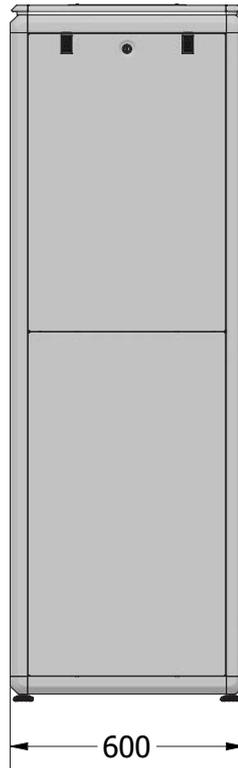


Side View




Rear View

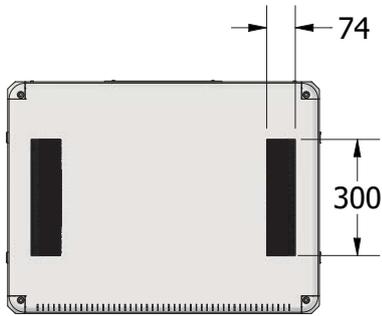


Top View

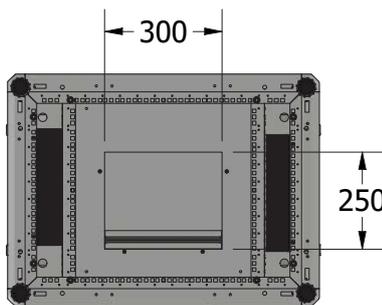

Bottom View

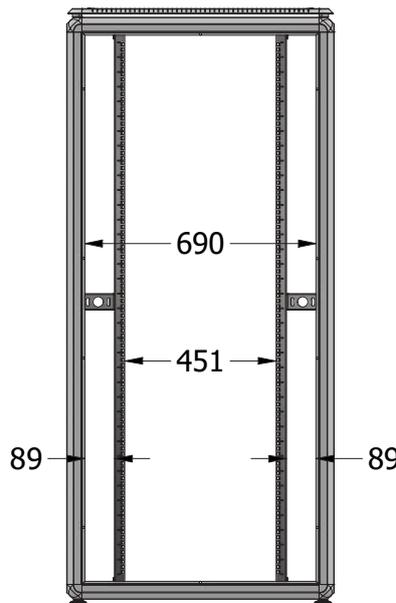

Front View

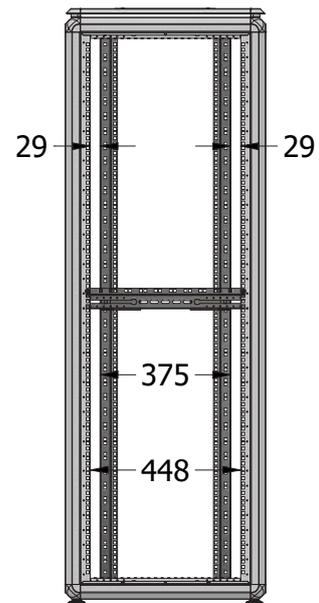

Side View





Compliance with Standards: TS EN 61587-1 / TS EN IEC 62208 / IEC 60917 / IEC 60297




FRONT DOOR OPENING ANGLE: 110°

MATERIAL: 1.2 mm Steel / Powder Coating RAL7035 / 9005			
Load Capacity: 2000kg			
DIMENSIONS			
SIZE	W	H	D
RDL22U88	800	1154	800
RDL26U88	800	1332	800
RDL32U88	800	1599	800
RDL36U88	800	1776	800
RDL40U88	800	1954	800
RDL42U88	800	2043	800
RDL46U88	800	2221	800

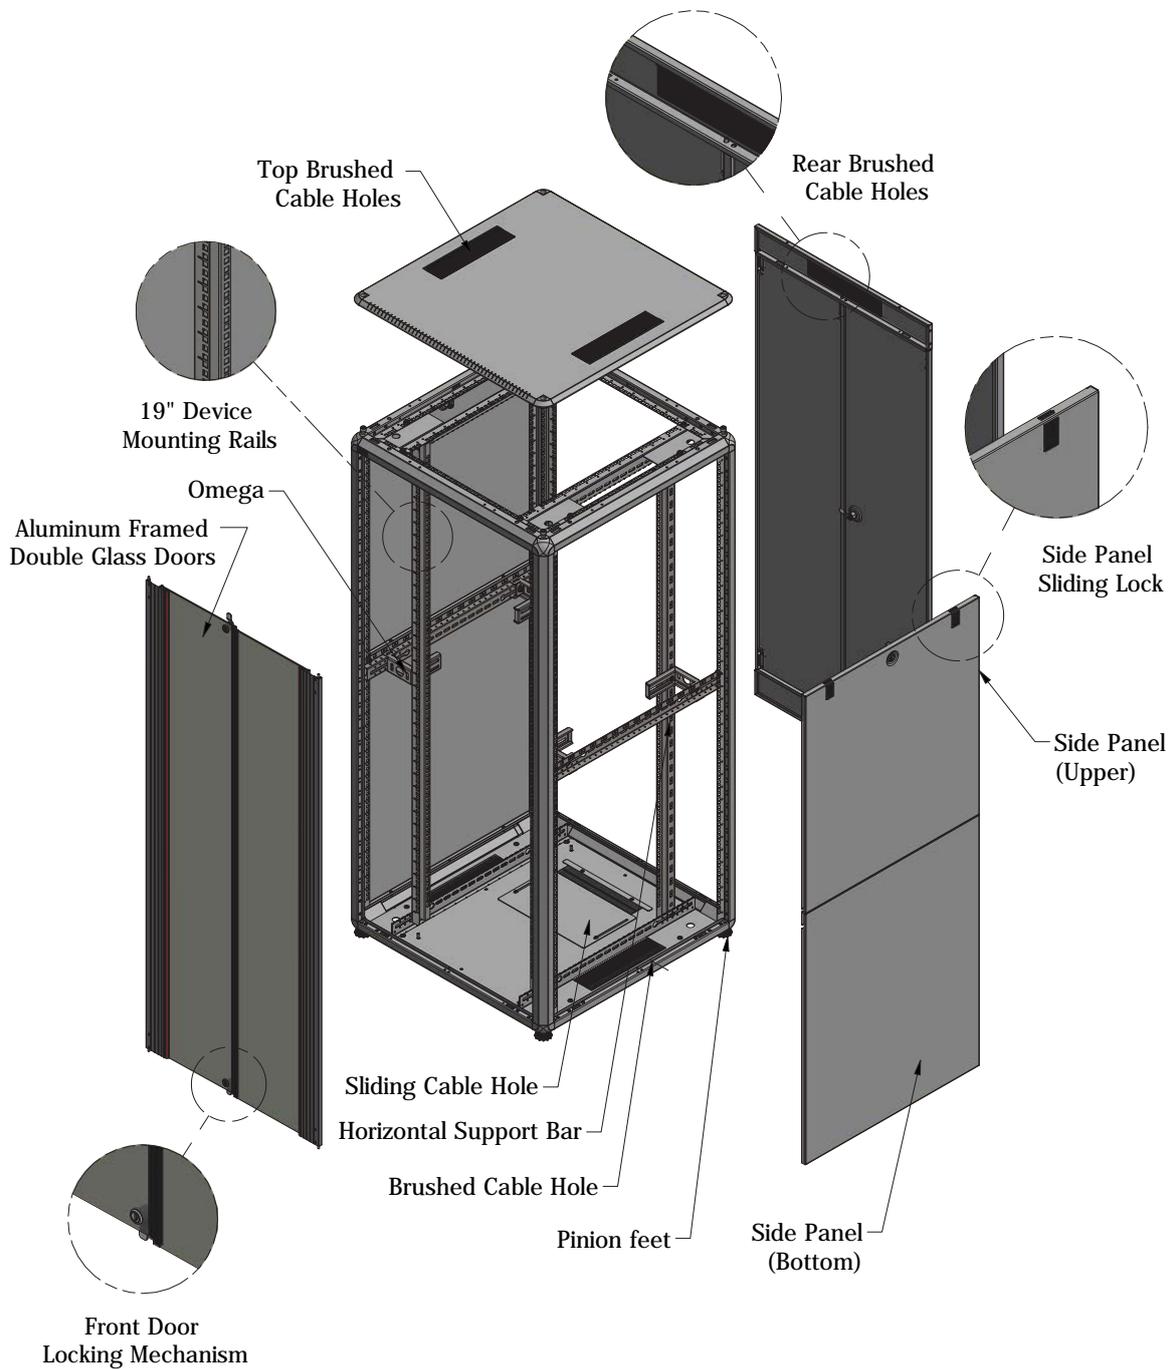

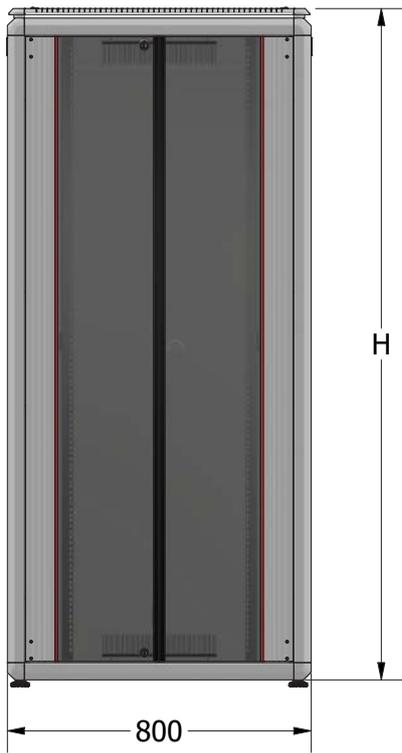


Front View

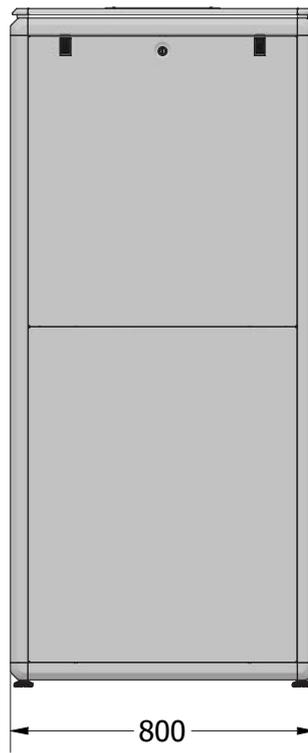


Side View




Rear View

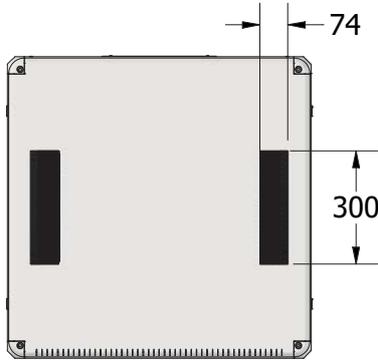


Top View

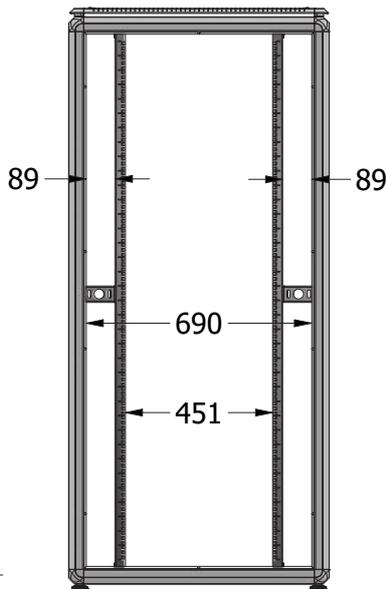


Front View

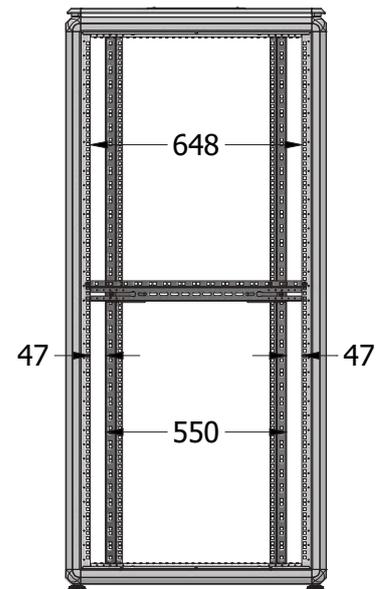

Side View

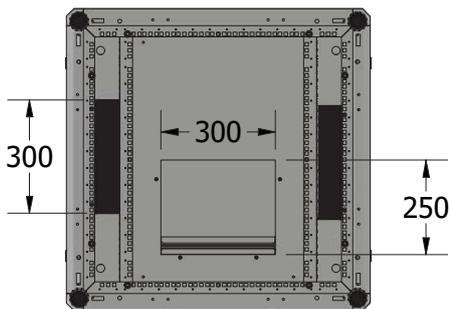

Bottom View

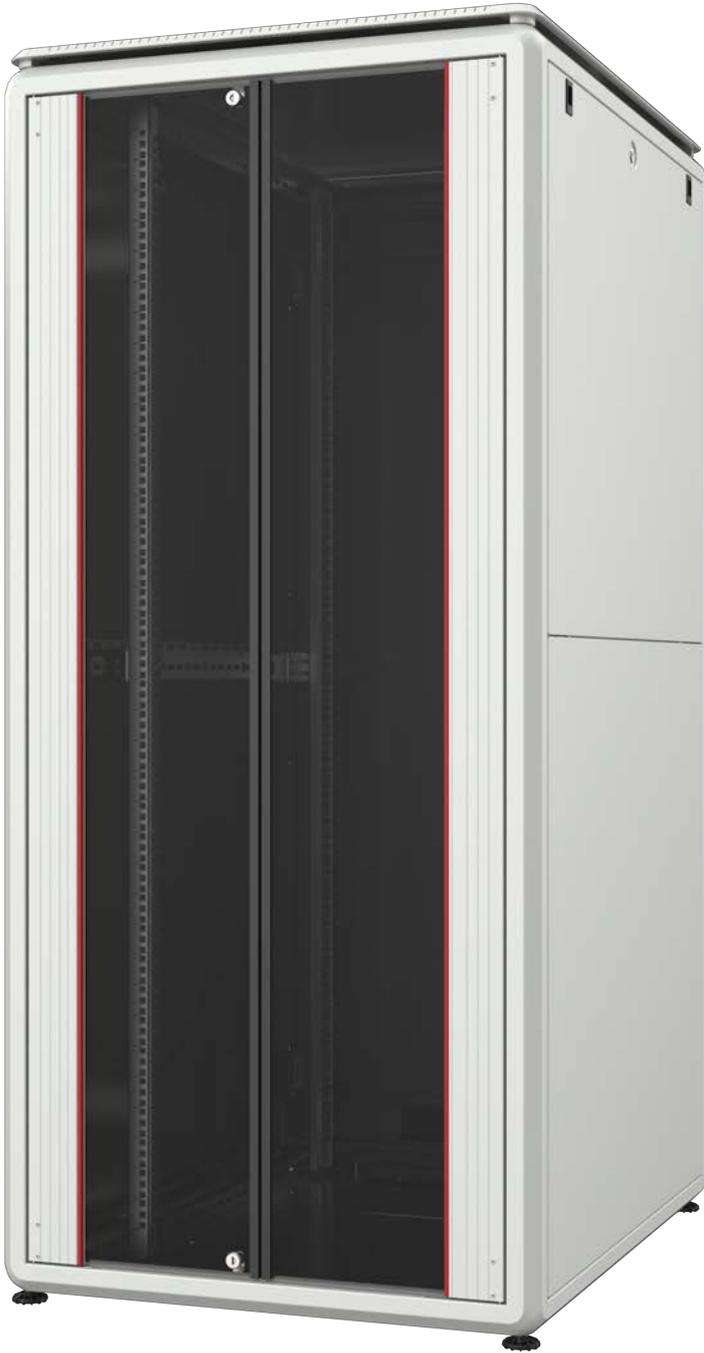



Compliance with Standards: TS EN 61587-1 / TS EN IEC 62208 / IEC 60917 / IEC 60297




FRONT DOOR OPENING ANGLE: 110°

MATERIAL: 1.2 mm Steel / Powder Coating RAL7035 / 9005			
Load Capacity: 2000kg			
DIMENSIONS			
SIZE	W	H	D
RDL22U81	800	1154	1000
RDL26U81	800	1332	1000
RDL32U81	800	1599	1000
RDL36U81	800	1776	1000
RDL40U81	800	1954	1000
RDL42U81	800	2043	1000
RDL46U81	800	2221	1000

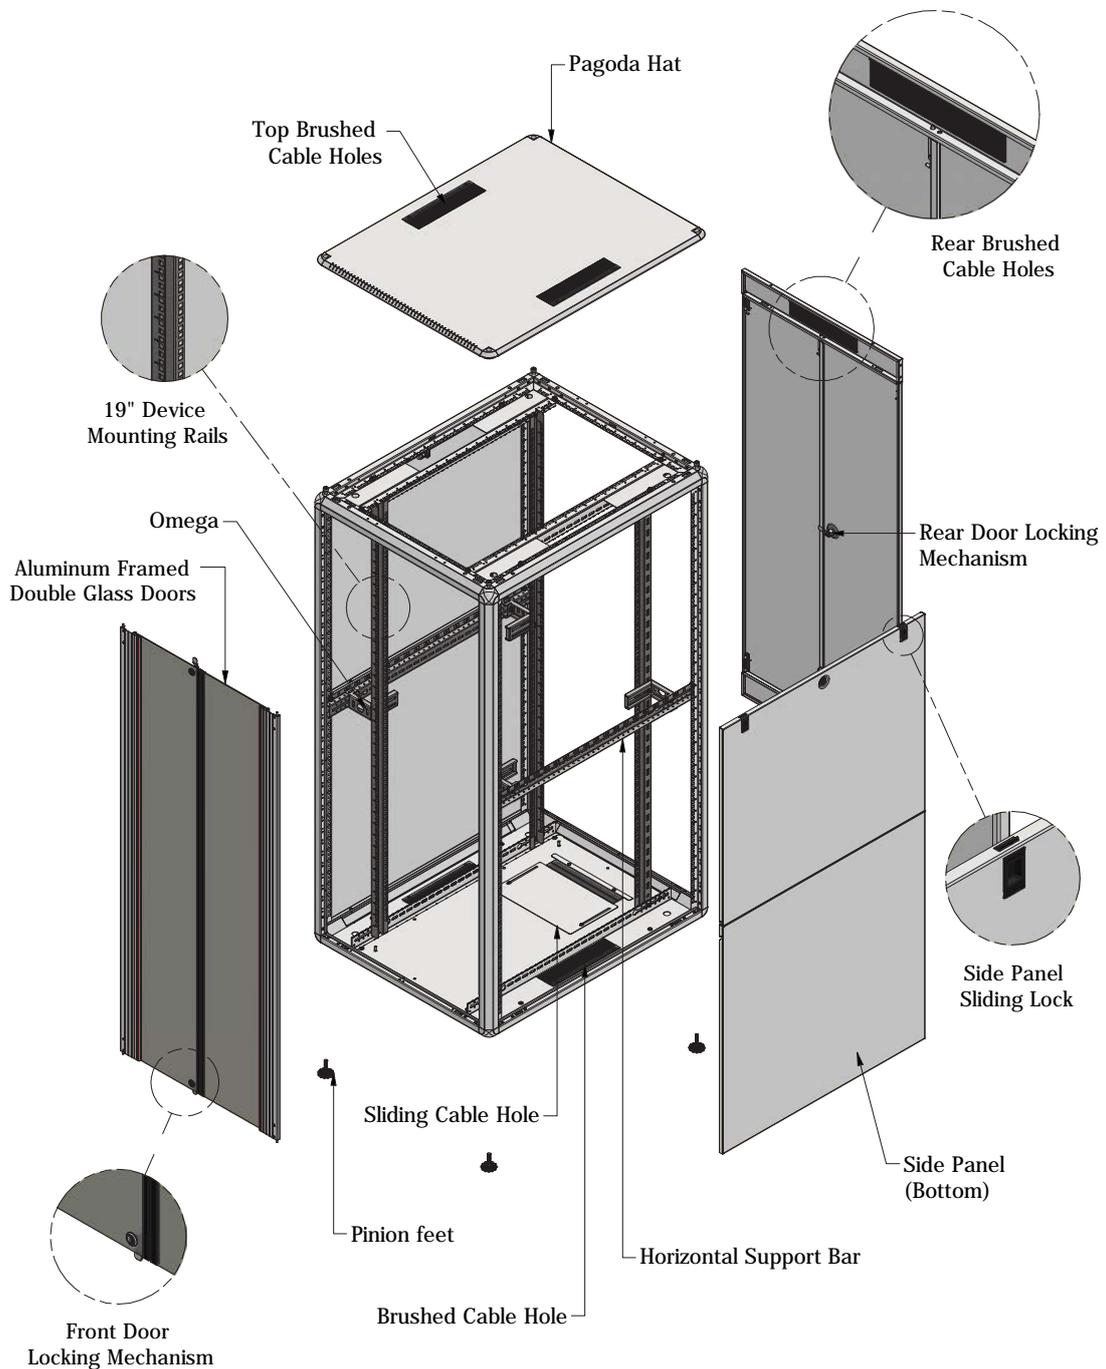

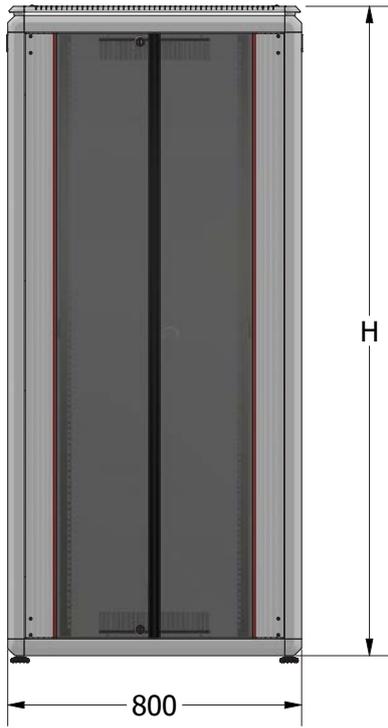


Front View

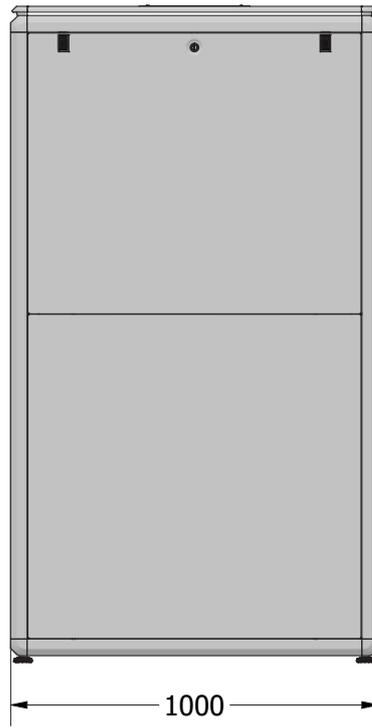


Side View




Rear View

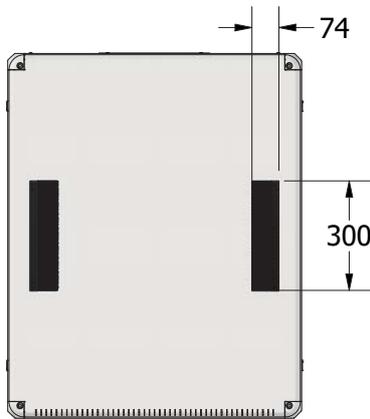


Top View

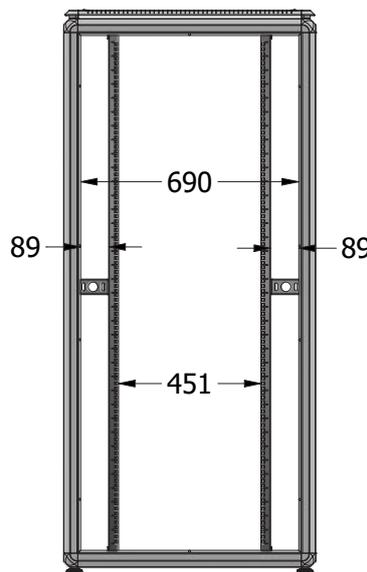

Front View

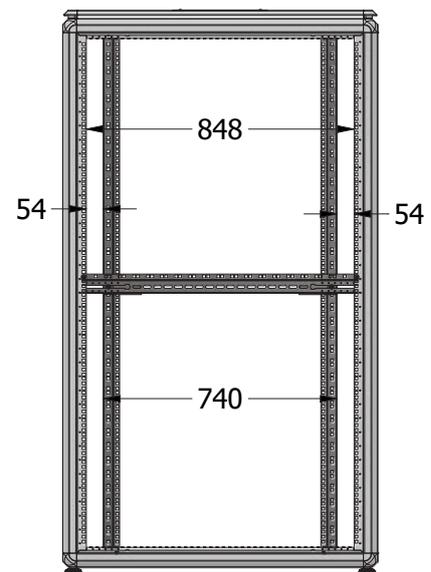

Side View

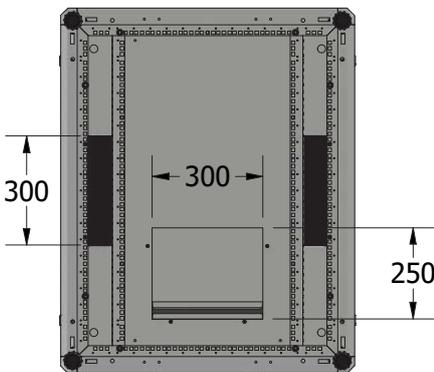

Bottom View