Cable specifications

1. Cable construction
28 AWG 1/0.32BC*1P+1/0.254BC*1C+AL*5P+
1/0.254BC*4C+AL+1/0.0.254BC+64#/0.12AL*1C OD7.3

2. Connectors: P1 & P2: HDMI 19P female; black, gold-plated shell.

3. Support: HDMI 2.0, 4K 60 Hz

4. Hood (P1 & P2): Molded 45P PVC

5. Testing: 100% electrical testing

6. Pinout: 1:1

Technical notes

1. Insertion force: 4.5 kgf max.
2. Withdrawal force: 1.0 kgf min.; 4.0 kgf max.
3. Durability: 10,000 cycles min.
4. Rated current: 0.5 A
5. Rated voltage: 40 V max.
6. Dielectric withstanding voltage: 500 V AC min. (unmated); 300 V AC min. (mated).
7. Contact resistance: 30 mΩ max.
8. Insulation resistance: 100 MΩ min. (unmated); 10 MΩ min. (mated).
9. Operating temperature: -20 °C to +85 °C
10. This panel is designed for use only in a compatible wall box or slot matching this dimension.

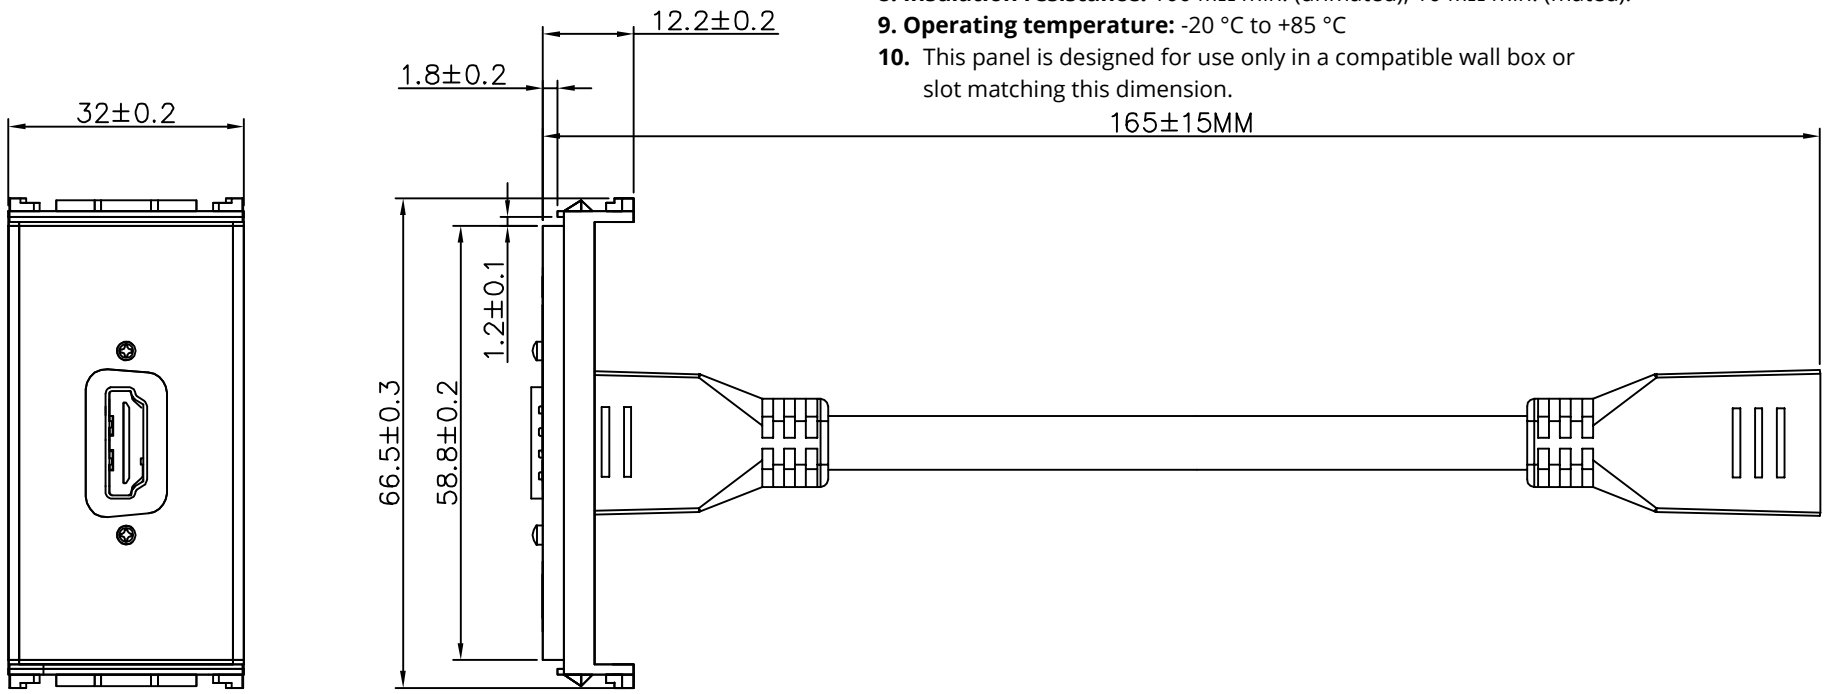


Plate materials

Plastic: ABS

Screw: Iron

HDMI shell & pin: Brass plated with gold

				Description	Finished products	Scale	FIT	Units: mm	3rd angle
				Model no.	**WI221273**				
Approved	Checked	Drawing	Designed	Drawing no.					
				Finishing		▲	11/11/2026		A3
						SYM	Date		Revision