

ZYXEL

Zyxel USGFLEX50HP-EU0101F cortafuegos (hardware) 0,35 Gbit/s

Marca : Zyxel


Código del producto: USGFLEX50HP-EU0101F

Nombre del producto : USGFLEX50HP-EU0101F

Zyxel USGFLEX50HP-EU0101F. Rendimiento del cortafuegos: 0,35 Gbit/s, Rendimiento de VPN: 0,09 Gbit/s. Disipación del calor: 40,92 BTU/h, Usuarios concurrentes: 15 usuario(s), Tiempo medio entre fallos: 655130 h. Algoritmos de seguridad soportados: 3DES, 256-bit AES, DES, HTTPS, IPSec, MD5, SHA-1, SHA-2. Protocolos de gestión: SNMP v1, v2c, v3. Ethernet LAN, velocidad de transferencia de datos: 10,100,1000 Mbit/s, Conexión WAN: Ethernet (RJ-45)



Transmisión de datos		Puertos e Interfaces	
Rendimiento del cortafuegos *	0,35 Gbit/s	Enchufe de entrada de CC	✓
Rendimiento de VPN	0,09 Gbit/s	Diseño	
Número máximo de conexiones de firewall	20000	Ventilador integrado	✗
Desempeño		Control de energía	
Procesador incorporado	✓	Corriente de entrada	2 A
Disipación del calor	40,92 BTU/h	Voltaje de entrada DC	12 V
Usuarios concurrentes	15 usuario(s)	Consumo de energía (max)	12 W
Syslog	✓	Aprobaciones reguladoras	
Tiempo medio entre fallos	655130 h	Certificación	FCC Part 15 (Class B), IC, CE EMC (Class B), RCM, BSMI
Conexión		Condiciones ambientales	
Wifi	✗	Intervalo de temperatura operativa	0 - 40 °C
Conexiones simultáneas VPN/SSL (máximo)	15	Intervalo de temperatura de almacenaje	-30 - 70 °C
VPN, cantidad de túneles	10	Intervalo de humedad relativa para funcionamiento	10 - 90%
Seguridad		Intervalo de humedad relativa durante almacenaje	10 - 90%
Algoritmos de seguridad soportados	3DES, 256-bit AES, DES, HTTPS, IPSec, MD5, SHA-1, SHA-2	Peso y dimensiones	
Protección DDoS	✓	Ancho	216 mm
Seguridad con cortafuegos	✓	Profundidad	143 mm
Protocolos		Altura	33 mm
Protocolos de gestión	SNMP v1, v2c, v3	Peso	880 g
Características de administración		Empaquetado	
Indicadores LED	✓	Ancho del paquete	276 mm
Administración basada en web	✓	Altura del paquete	185 mm
Filtro de URL	✓	Profundidad del paquete	98 mm
Puertos e Interfaces		Peso del paquete	1,41 kg
Ethernet LAN, velocidad de transferencia de datos	10,100,1000 Mbit/s	Contenido del embalaje	
Conexión WAN	Ethernet (RJ-45)	Cables incluidos	LAN (RJ-45)

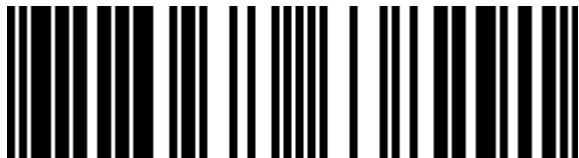

4718937638291

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.