

## StarTech.com Tarjeta Adaptador de Red PoE/PSE PCI Express PCIe Gigabit Ethernet con 2 Puertos RJ45

**Marca :** StarTech.com

**Código del producto:** ST2000PEXPSE

**Nombre del producto :** Tarjeta Adaptador de Red PoE/PSE PCI Express PCIe Gigabit Ethernet con 2 Puertos RJ45

StarTech Tarjeta Adaptador Red PoE/PSE PCI Express PCIe Gigabit Ethernet 2 Puertos RJ45 - 1x LP4

Macho - 1x Conector SATA Alimentacion

StarTech.com Tarjeta Adaptador de Red PoE/PSE PCI Express PCIe Gigabit Ethernet con 2 Puertos RJ45.

Interno. Tecnología de conectividad: Alámbrico, Interfaz de host: PCI Express, Interfaz: Ethernet. Rango máximo de transferencia de datos: 2000 Mbit/s



### Puertos e Interfaces

|                                               |             |
|-----------------------------------------------|-------------|
| Tecnología de conectividad *                  | Alámbrico   |
| Interfaz de host *                            | PCI Express |
| Interfaz *                                    | Ethernet    |
| Ethernet LAN (RJ-45) cantidad de puertos      | 2           |
| Cantidad de puertos Power over Ethernet (PoE) | 2           |

### Conexión

|                                                   |                                                                                            |
|---------------------------------------------------|--------------------------------------------------------------------------------------------|
| Rango máximo de transferencia de datos *          | 2000 Mbit/s                                                                                |
| Estándares de red *                               | IEEE 802.1Q, IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3at, IEEE 802.3u, IEEE 802.3x |
| Ethernet                                          | ✓                                                                                          |
| Ethernet LAN, velocidad de transferencia de datos | 10,100,1000 Mbit/s                                                                         |
| Tecnología de cableado                            | 10/100/1000BaseT(X)                                                                        |
| IEEE Auto MDIX                                    | ✓                                                                                          |
| Bidireccional completo (Full duplex)              | ✓                                                                                          |
| Jumbo Frames, soporte                             | ✓                                                                                          |
| Etiquetado VLAN                                   | ✓                                                                                          |
| Controlador LAN                                   | Realtek RTL8111E                                                                           |

### Diseño

|                           |                        |
|---------------------------|------------------------|
| Componente para *         | PC                     |
| Interno *                 | ✓                      |
| Circuito integrado        | Realtek - RTL8111E     |
| Indicadores LED           | Actividad, Enlace, PoE |
| Tiempo medio entre fallos | 140981 h               |
| Certificación             | CE, FCC, REACH         |

### Requisitos del sistema

|                                         |                                                                                                                                    |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Sistema operativo Linux soportado       | ✓                                                                                                                                  |
| Sistema operativo de servidor soportado | Windows Server 2003, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019 |

### Condiciones ambientales

|                                                   |             |
|---------------------------------------------------|-------------|
| Intervalo de temperatura operativa                | 0 - 55 °C   |
| Intervalo de temperatura de almacenaje            | -20 - 85 °C |
| Intervalo de humedad relativa para funcionamiento | 5 - 95%     |

### Peso y dimensiones

|             |        |
|-------------|--------|
| Ancho       | 19 mm  |
| Profundidad | 195 mm |
| Altura      | 68 mm  |
| Peso        | 104 g  |

### Empaquetado

|                         |        |
|-------------------------|--------|
| Controladores incluidos | ✓      |
| Soporte de bajo perfil  | ✓      |
| Ancho del paquete       | 164 mm |
| Profundidad del paquete | 229 mm |
| Altura del paquete      | 44 mm  |
| Peso del paquete        | 246 g  |

### Contenido del embalaje

|                   |   |
|-------------------|---|
| Manual de usuario | ✓ |
|-------------------|---|

### Detalles técnicos


| Control de energía                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Detalles técnicos                      |             |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|-------------|
| Voltaje de salida                   | 48 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Certificados de conformidad            | RoHS        |
| Requisitos del sistema              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Datos logísticos                       |             |
| Sistema operativo Windows soportado | Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 IOT Core, Windows 10 Pro, Windows 10 Pro x64, Windows 10 x64, Windows 2000, Windows 7, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 7 x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64, Windows 98SE, Windows ME, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows Vista x64, Windows XP, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64 | Código de Sistema de Armomización (SA) | 85176990    |
|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Ancho de la caja principal             | 444 mm      |
|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Longitud de la caja                    | 522 mm      |
|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Alto de la caja principal              | 344 mm      |
| Sistema operativo MAC soportado     | Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Cantidad por caja                      | 40 pieza(s) |
|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Otras características                  |             |
|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Tamaño de buffer                       | 48 KB       |
|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Soporte de control de flujo            | ✓           |



0065030849128




065030849128

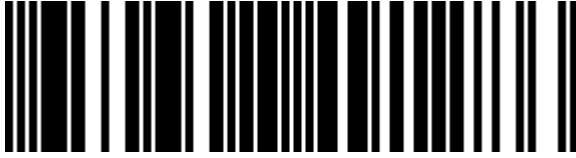

0650308491286



650308491286

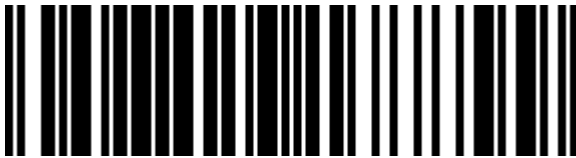

4058829177799

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.