

StarTech.com Mini Adaptador de Red Inalámbrico USB 2.0 a Wireless N de 300 Mbps - Wifi Externo 802.11n 2T2R

Marca : StarTech.com

Código del producto:
USB300WN2X2C

Nombre del producto : Mini Adaptador de Red Inalámbrico USB 2.0 a Wireless N de 300 Mbps - Wifi Externo 802.11n 2T2R

- Diseño ultra compacto y liviano
- Configuración de antenas: 2 Transmisoras/2 Receptoras (2x2:2)
- Cumple con las normas IEEE 802.11n, con tasas de transferencia de datos de hasta 300 Mbps
- Retrocompatible con 802.11b/g (11/54 Mbps, respectivamente)
- Soporte para seguridad inalámbrica WEP (64 y 128 bits), WPA y WPA2
- Soporte de calidad de servicio WMM

StarTech Mini Adaptador de Red Inalámbrico USB 2.0 a Wireless N de 300 Mbps - NIC Wifi Externo 802.11n 2T2R

StarTech.com Mini Adaptador de Red Inalámbrico USB 2.0 a Wireless N de 300 Mbps - Wifi Externo 802.11n 2T2R. Tecnología de conectividad: Inalámbrico, Interfaz de host: USB, Interfaz: Ethernet / WLAN.

Rango máximo de transferencia de datos: 300 Mbit/s, Estándar Wi-Fi: Wi-Fi 4 (802.11n), Banda Wi-Fi: Banda única (2,4 GHz). USB con suministro de corriente. Color del producto: Negro



Puertos e Interfaces		Requisitos del sistema	
Tecnología de conectividad *	Inalámbrico	Sistema operativo de servidor soportado	Windows Server 2003, Windows Server 2008 R2, Windows Server 2012, Windows Server 2016, Windows Server 2019
Interfaz de host *	USB		
Interfaz *	Ethernet / WLAN		
Conexión		Condiciones ambientales	
Rango máximo de transferencia de datos *	300 Mbit/s	Intervalo de temperatura operativa	0 - 40 °C
Estándares de red *	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n	Intervalo de temperatura de almacenaje	-40 - 70 °C
Wifi	✓	Intervalo de humedad relativa para funcionamiento	10 - 90%
Banda Wi-Fi	Banda única (2,4 GHz)	Peso y dimensiones	
Estándar Wi-Fi	Wi-Fi 4 (802.11n)	Ancho	16 mm
Wi-Fi estándares	802.11b, 802.11g, Wi-Fi 4 (802.11n)	Profundidad	22 mm
WLAN velocidad de transferencia de datos, soportada	11,54,300 Mbit/s	Altura	6 mm
Algoritmos de seguridad soportados	128-bit WEP, 64-bit WEP, TKIP, WPA, WPA2	Peso	2 g
Diseño		Empaquetado	
Color del producto	Negro	Ancho del paquete	124 mm
Interno *	✗	Profundidad del paquete	90 mm
Circuito integrado	RTL8192EU	Altura del paquete	23 mm
Indicadores LED	Actividad, Enlace	Peso del paquete	65 g
Control de energía		Contenido del embalaje	
USB con suministro de corriente	✓	Manual de usuario	✓
Detalles técnicos			
		Certificados de conformidad	RoHS
Datos logísticos			
		Código de Sistema de Armomización (SA)	85176990

Requisitos del sistema		Datos logísticos	
Sistema operativo Windows soportado	Windows 10, Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 IOT Core, Windows 10 Pro, Windows 10 Pro x64, Windows 10 x64, Windows 7, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 7 x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows Vista x64, Windows XP, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64	Ancho de la caja principal	550 mm
		Longitud de la caja	274 mm
Sistema operativo MAC soportado	Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.13 High Sierra, Mac OS X 10.14 Mojave, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks	Alto de la caja principal	404 mm
		Cantidad por caja	200 pieza(s)
Sistema operativo Linux soportado	✓		



0065030858243




065030858243



0650308582434



650308582434

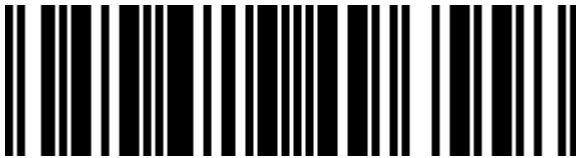

5054629496558

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.