

### Overview

Shape the Future of QuickSpecs – Your Input Matters

### HPE Aruba Networking 610 Series Campus Access Points

#### Fast, Resilient, and Secure Wi-Fi 6E Connectivity in a Compact and Affordable Platform

For enterprises who need more wireless capacity and/or wider channels, HPE Aruba Networking 610 Series Campus Access Points are designed to take advantage of the newly available 6 GHz spectrum using a unique dual-radio/tri-band architecture. Adding support for the 6 GHz band to the traditional 2.4 GHz and 5 GHz bands more than doubles the available wireless capacity in a wireless network – so you can meet growing demand due to bandwidth-hungry video, increasing numbers of client and IoT devices, and growth in cloud.

The 610 series features two radios that can be tuned to any two of the three available spectrum bands for Wi-Fi (2.4 GHz, 5 GHz, 6 GHz). This flexibility provides a cost-effective and compact platform that delivers full tri-band coverage as part of a multi-access point deployment and can be used with software that will intelligently and flexibly configure the radios of each of these dual-radio access points.



HPE Aruba Networking 610 Series Campus Access Points

## Overview

### Key Features

- Unlocks the 6 GHz band to more than double the available capacity in wireless networks
- Comprehensive dual radio/tri-band coverage across 2.4 GHz, 5 GHz, and 6 GHz to deliver up to 3.6 Gbps combined peak data rate<sup>1</sup>
- Compact and low power consumption – virtually unrestricted operation from an 802.3af (class 3) PoE source<sup>2</sup>
- Up to seven 160 MHz channels in 6 GHz to support low-latency, bandwidth-hungry applications like high-definition video, and augmented reality/virtual reality applications
- 2.5 Gbps Smart Rate Ethernet port to minimize wired bottlenecks
- Built-in GPS receivers and fine time measurement (802.11mc) to enable APs to automatically locate themselves and serve as reference points for accurate indoor location measurements
- Offered as optional eco-friendly 10-packs

### Notes:

- <sup>1</sup>When configured for 5 GHz + 6 GHz operation
  - <sup>2</sup>By default (with IPM disabled) the AP-615 will disable the USB port and limit the speed of the Ethernet port to 1Gbps when on class 3 POE. The Intelligent Power Monitoring feature can be used to avoid these restrictions
- 



---

## Standard Features

### More Capacity and Wider Channels

The HPE Aruba Networking 610 Series access points are designed to take advantage of Wi-Fi 6E and the 6 GHz band, which translates into far greater speeds, wider channels for multi-gigabit traffic, and less interference. Its two 2x2 MIMO radios deliver a combined peak data rate of up to 3.6 Gbps when configured for concurrent 5 GHz and 6 GHz operation.

---

### Advantages of 6 GHz

Wi-Fi 6E provides up to 1200 MHz of additional unlicensed spectrum in the 6 GHz band for higher throughput and improved application performance. With up to seven 160 MHz channels, Wi-Fi 6E can better support low-latency, bandwidth hungry applications like high-definition video and augmented reality/virtual reality applications. Only Wi-Fi 6E capable devices can use the 6 GHz band so there is no interference or slowdowns due to legacy devices.

---

### Device Class Support

The 610 series access points are part of the low power indoor (LPI) device class. This fixed indoor-only class uses lower power levels and does not require an Automated Frequency Coordination service (AFC) to manage incumbent outdoor services, which is required for standard class APs.

---

### Global Readiness

While the need for more Wi-Fi capacity is recognized across the globe, countries are approaching the 6 GHz band differently. The 610 Series APs are set up to automatically update regulatory rules once Wi-Fi 6E regulations have been approved and certified.

---

### Extend the Benefits of Wi-Fi 6

The 610 series access points are based on the 802.11ax (Wi-Fi 6) standard, which means that all its efficiency and security enhancements are also available on the 6 GHz band. Wi-Fi 6 features such as Orthogonal Frequency Division Multiple Access (OFDMA), BSS coloring etc. are fully supported on the HPE Aruba Networking Wi-Fi 6E access points as well.

---

### Advantages of OFDMA

The 610 series is equipped with OFDMA to handle multiple 802.11ax capable clients on each channel simultaneously, regardless of device or traffic type. Channel utilization is optimized by handling each transaction via smaller sub-carriers or resource units (RUs), which means that clients are sharing a channel and not competing for airtime and bandwidth.

---

### Wi-Fi Optimization

#### Client Optimization

HPE Aruba Networking's patented AI-powered technology eliminates sticky client issues by steering a client to the AP where it receives the best radio signal. ClientMatch steers traffic from the noisy 2.4 GHz band to the preferred 5 GHz or 6 GHz band depending on client capabilities and access point settings. ClientMatch also dynamically steers traffic to load balance access points to improve the user experience.

#### Automated Wi-Fi Radio Frequency Management

To optimize the user experience and provide greater stability, HPE Aruba Networking AirMatch allows organizations to automate network optimization using machine learning. AirMatch provides dynamic bandwidth adjustments to support changing device density, enhanced roaming using an even distribution of Effective Isotropic Radiated Power (EIRP) to radios, and real-time channel assignments to mitigate co-channel interference.

AirMatch also ensures that the two radios of the 610 series access points are automatically configured in the most effective and efficient way to deliver full tri-band coverage.

### HPE Aruba Networking Advanced Cellular Coexistence (ACC)

Unique to HPE Aruba Networking, Advanced Cellular Coexistence uses built-in filtering to automatically minimize the impact of interference from cellular networks, distributed antenna systems (DAS), and commercial small cell or femtocell equipment.

### Intelligent Power Monitoring(IPM)

For better insights into energy consumption, HPE Aruba Networking access points continuously monitor and report hardware energy usage. Unlike other vendor's access points, HPE Aruba Networking access points can also be configured to enable or disable capabilities based on available PoE power – ideal when wired switches have exhausted their power budget. Enterprises can deploy Wi-Fi 6E access points and update switching and power at a later if needed based on their actual usage.



## Standard Features

### Self-Locating APs

Indoor location shouldn't require guesswork or costly overlay technologies. HPE Aruba Networking's Wi-Fi 6 and 6E access points help organizations leverage their wireless investment to deliver indoor location – everywhere.

HPE Aruba Networking 610 Series Campus access points include built-in GPS receivers and intelligent software to allow them to automatically locate themselves accurately within the universal framework of latitude and longitude. As part of HPE Aruba Networking's indoor location services solution, they serve as reference points for client devices using fine time measurements (802.11mc) and other location technologies.

In addition, HPE Aruba Networking's Wi-Fi 6 and 6E APs support Open Locate, an emerging standard that allows access points to share their location over the air and through cloud-based APIs, enabling mobile devices to locate themselves and applications to support network analytics.

### APs as an IoT transport platform

The 610 series includes an integrated Bluetooth 5 and 802.15.4 radio for Zigbee support to simplify deploying and managing IoT-based location services, asset tracking services, security solutions, and IoT sensors. There is also a USB-port extension to provide IoT connectivity to a wider range of devices. These IoT capabilities allows organizations to leverage HPE Aruba Networking access points as an IoT transport platform, which eliminates the need for an overlay infrastructure and additional IT resources and can accelerate IoT initiatives.

In addition, Target Wake Time (TWT), part of the 802.11ax standard, establishes a schedule for when clients need to communicate with an access points. This helps improve client power savings and reduces airtime contention with other clients, which is ideal for IoT.

### HPE Aruba Networking Secure Infrastructure

The 610 series includes build-security capabilities such as:

- **WPA3 and Enhanced Open** Support for stronger encryption and authentication is provided via the latest version of WPA for enterprise-protected networks. Enhanced Open offers seamless new protection for users connecting to open networks where each session is automatically encrypted to protect user passwords and data on guest networks.
- **WPA2-MPSK** MPSK enables simpler passkey management for WPA2 devices – should the Wi-Fi password on one device or device type change, no additional changes are needed for other devices. This capability requires HPE Aruba Networking ClearPass Policy Manager.
- **Simple and Secure Access** To improve security and ease of management, IT can centrally configure and automatically enforce role-based policies that define proper access privileges for employees, guests, contractors, and other user groups – no matter where users connect on wired and WLANs. Dynamic Segmentation eliminates the time consuming and error-prone task of managing complex and static VLANs, ACLs, and subnets by dynamically assigning policies and keeping traffic secure and separated.
- **Seamless Handoffs to Cellular** Built on the technical foundations of Passpoint® and Wi-Fi Calling, HPE Aruba Networking Air Pass creates a roaming network across the HPE Aruba Networking enterprise customer footprint, extending cellular coverage and enhancing the visitor and subscriber experience to deliver a great experience for your guests while reducing costs and management overhead for DAS.
- **Flexible Operation and Management** Our access points can operate as standalone access points or with a gateway for greater scalability, security, and manageability. access points can be deployed using zero touch provisioning – without on-site technical expertise – for ease of implementation in branch offices and for remote work. HPE Aruba Networking access points can be managed using cloud-based or on-premises solutions for any campus, branch, or remote work environment. HPE Aruba Networking Central provides a single pane of glass for overseeing every aspect of wired and wireless LANs, WANs, and VPNs. AI-powered analytics, end-to-end orchestration and automation, and advanced security features are built natively into the solution.

---

## Summary

HPE Aruba Networking 610 Series Campus Access Points are designed to take advantage of the 6 GHz band using two radios that can deliver comprehensive tri-band coverage in a multi-access point environment and better meet the growing demands of Wi-Fi due to increased use of video, growth in client and IoT devices, and expanded use of cloud.

With a 3.6 Gbps combined peak data rate for higher throughput and faster speeds for indoor use, the 610 series delivers a cost-effective enterprise Wi-Fi 6E solution with increased capacity, wider channels, reduced power consumption.

---



## Configuration Information

### BTO Models

#### 615 Internal Antenna Access Points

Rule #	Description	SKU
3	HPE Aruba Networking AP-615-EG Dual Radio Tri Band 2x2 Wi-Fi 6E Int Antennas Campus AP	R7J46A
4	HPE Aruba Networking AP-615-IL Dual Radio Tri Band 2x2 Wi-Fi 6E Int Antennas Campus AP	R7J47A
5	HPE Aruba Networking AP-615-JP Dual Radio Tri Band 2x2 Wi-Fi 6E Int Antennas Campus AP	R7J48A
1, 6	HPE Aruba Networking AP-615-RW Dual Radio Tri Band 2x2 Wi-Fi 6E Int Antennas Campus AP	R7J49A
2, 7	HPE Aruba Networking AP-615-US Dual Radio Tri Band 2x2 Wi-Fi 6E Int Antennas Campus AP	R7J50A
8	HPE Aruba Networking AP-615 (ID) Dual Radio Tri Band 2x2 802.11ax Wi-Fi 6E Internal Ants Campus AP	S5E06A

#### Configuration Rules

Rule #	Description	SKU
1	Available everywhere except US, Israel, Egypt, Indonesia and Japan. Partners must have an SOT (Cross border agreement).	
2	Available in US only. Partners must have an SOT (Cross border agreement).	
3	Available in Egypt only. Partners must have an SOT (Cross border agreement).	
4	Available in Israel only. Partners must have an SOT (Cross border agreement).	
5	Available in Japan only. Partners must have an SOT (Cross border agreement).	
6	If the ordered qty of this AP is greater than or equal to 10, then the default will be the following Eco-Friendly 10-Pack(s) with the remainder as individual packs. Allow user to change the full quantity easily back to individual packs; HPE Aruba Networking AP-615 (RW) 2-Radio 3-Band 2x2 Wi-Fi 6E Internal Antennas 10-pack Campus AP	S3J33A
	If ordering greater than or equal to qty10 of this AP, consider ordering the Eco-Friendly 10-Packs(S1J33A). Please revert back to single pack if individual sale is desired.	
7	If the ordered qty of this AP is greater than or equal to 10, then the default will be the following Eco-Friendly 10-Pack(s) with the remainder as individual packs. Allow user to change the full quantity easily back to individual packs HPE Aruba Networking AP-615 (US10) 2-radio 3-band 2x2 Wi-Fi 6E Internal Antennas 10-Pack Campus AP	S1J34A
	If ordering greater than or equal to qty10 of this AP, consider ordering the Eco-Friendly 10-Packs(S1J34A). Please revert back to single pack if individual sale is desired.	
8	Available in Indonesia only. Partners must have an SOT (Cross border agreement).	

**Notes:** [OCA Only Model Selection Form - HPE Aruba Networking > Access Points > Indoor Campus: 610 Series Campus AP](#)

#### 615 Internal Antenna Access Points - TAA Models

Rule #	Description	SKU
	HPE Aruba Networking AP-615-EG Dual Radio Tri Band 2x2 Wi-Fi 6E Int Antennas TAA Campus AP	R7J51A
	HPE Aruba Networking AP-615-IL Dual Radio Tri Band 2x2 Wi-Fi 6E Int Antennas TAA Campus AP	R7J52A
	HPE Aruba Networking AP-615-JP Dual Radio Tri Band 2x2 Wi-Fi 6E Int Antennas TAA Campus AP	R7J53A
	HPE Aruba Networking AP-615-RW Dual Radio Tri Band 2x2 Wi-Fi 6E Int Antennas TAA Campus AP	R7J54A
	HPE Aruba Networking AP-615-US Dual Radio Tri Band 2x2 Wi-Fi 6E Int Antennas TAA Campus AP	R7J55A

**Notes:**

- [Add Mount Kit](#)
- [OCA Only Model Selection Form - HPE Offering > HPE Aruba Networking > Wireless > Access Points > Campus: HPE Aruba Networking 610 Series Campus Access Points](#)

#### 615 Internal Antenna Access Points - 10-Pack Eco-Friendly Bundle

	HPE Aruba Networking AP-615 (RW) 2-Radio 3-Band 2x2 Wi-Fi 6E Internal Antennas 10-pack Campus AP	S3J33A
	HPE Aruba Networking AP-615 (US) 2-Radio 3-Band 2x2 Wi-Fi 6E Internal Antennas 10-pack Campus AP	S3J34A



## Configuration Information

### Mount Accessories

#### AP Mount Kits

Rule #	Description	SKU
1	HPE Aruba Networking AP-MNT-A Campus AP Type A Suspended Ceiling Rail Flat 9/16 Mount Bracket Kit	R3J15A
1	HPE Aruba Networking AP-MNT-MP10-A Campus AP 10-Pack 9/16 Flat Ceiling Rail Mount Bracket Kit	JZ370A
1	HPE Aruba Networking AP-MNT-B Campus AP Type B Suspended Ceiling Rail Flat 15/16 Mount Bracket Kit	R3J16A
1	HPE Aruba Networking AP-MNT-MP10-B Campus AP 10-Pack 15/16 Flat Ceiling Rail Mount Bracket Kit	Q9G69A
1	HPE Aruba Networking AP-MNT-MP10-B1 Campus AP 10-Pack 15/16 Adj Flat Ceiling Rail Mount Bracket Kit	R6T34A
1	HPE Aruba Networking AP-MNT-C Campus AP Type C Suspended Ceiling Rail 9/16 Profile Mnt Bracket Kit	R3J17A
1	HPE Aruba Networking AP-MNT-MP10-C Campus AP 10-Pack Profile 9/16 Ceiling Rail Mount Bracket Kit	Q9G70A
1	HPE Aruba Networking AP-MNT-D Campus AP Type D Solid Surface Mount Bracket Kit	R3J18A
1	HPE Aruba Networking AP-MNT-MP10-D Campus AP 10-Pack Solid Surface Mount Bracket Kit	Q9G71A
1	HPE Aruba Networking AP-MNT-E Campus AP Type E Wall-Box Mount Bracket Kit	R3J19A
1	HPE Aruba Networking AP-MNT-MP10-E Campus AP 10-Pack Wall-box Mount Bracket Kit	R1C72A
1	HPE Aruba Networking AP-MNT-U Campus Access Point Type U Universal Mount Bracket Kit	S4K79A
1	HPE Aruba Networking AP-MNT-MP10-U Campus AP Universal 10-pack Mount Bracket Kit	S0J40A
1	HPE Aruba Networking AP-MNT-MP10-X Campus AP 10-Pack Mount Adapter Kit	R3T20A

#### Configuration Rules

Rule #	Description
1	<b>OCA Display Notes:</b> Kit contains mounts for 10 access points
<b>Notes:</b>	<b>Clic Warning:</b> Access Points do not include a Mount. Qty 1 Mount kits should be selected.

### Power Options

#### Power Options

Rule #	Description	SKU
1	HPE Aruba Networking AP-AC2-12B 12V/48W AC/DC Desktop Style Power Adapter with 2.1/5.5mm Connector	R3K00A
1	<ul style="list-style-type: none"> <li>Add AC power cord</li> </ul> HPE Aruba Networking AP-POE-AFGE 1-Port GbE 802.3af 15.4W Midspan Injector	R6P68A
1	<ul style="list-style-type: none"> <li>Add AC power cord</li> <li>USB port disabled (when IPM disabled)</li> </ul> HPE Aruba Networking AP-POE-ATSR 1-Port Smart Rate 802.3at 30W Midspan Injector	R6P67A

#### Configuration Rules

Rule #	Description
1	If this Power Supply is selected, bring in (Min 1 // Max 1) Localized power cord based on the HPE Aruba Networking Wireless Power Cord Table Menu
<b>Notes:</b>	<b>OCA Display Notes:</b> Most devices are PoE powered from switch so these are optional

### Accessories

#### Snap-on Covers

Rule #	Description	SKU
	HPE Aruba Networking AP-615-CVR-20 20-pack White Non-glossy Snap-on Covers	R7J56A
<b>Notes:</b>	Kit contains covers for 20 access points	

#### Configuration Rules

Rule #	Description
<b>Notes:</b>	<b>OCA Display Notes:</b> Kit contains 20 optional snap-on covers



---

## Configuration Information

### Other Accessories

Rule #	Description	SKU
	HPE Aruba Networking AP-CBL-EXT10 10-pack CAT6A Ethernet Extension Cables	R8L34A
	<ul style="list-style-type: none"><li>10-pack Extension Cables</li></ul>	
	HPE Aruba Networking AP-CBL-SERU Micro-USB TTL3.3V to USB2.0 AP Console Adapter Cable	JY728A
	<ul style="list-style-type: none"><li>Drivers available on the HPE Aruba Networking Support Center</li></ul>	
	HPE Aruba Networking AP-MOD-SERU Micro-USB TTL3.3V to RJ45 RS232 AP Console Adapter Module	R6Q99A
	HPE Aruba Networking USB LTE Modem for Access Points and Gateways	R8F34A
	HPE Aruba Networking USB Extender Cable Kit	R8G76A
	<ul style="list-style-type: none"><li>Optional extender cable kit for USB LTE Modem</li></ul>	

---



## Technical Specifications

### Hardware Variants

AP-615: Internal antenna models

### Wi-Fi Radio Specifications

- 2.4 GHz radio: Two spatial stream Single User (SU) MIMO for up to 574 Mbps wireless data rate with 2SS HE40 802.11ax client devices (287 Mbps for HE20)
- 5 GHz radio: Two spatial stream Single User (SU) MIMO for up to 1.2 Gbps wireless data rate with 2SS HE80 802.11ax client devices
- 6 GHz radio: Two spatial stream Single User (SU) MIMO for up to 2.4 Gbps wireless data rate with 2SS HE160 802.11ax client devices
- Up to 512 associated client devices per radio, and up to 16 BSSIDs per radio (limited to 8 for the 6 GHz radio when using version 8 software)
- Supported frequency bands (country-specific restrictions apply)
  - 2.400 to 2.4835GHz ISM
  - 5.150 to 5.250GHz U-NII-1
  - 5.250 to 5.350GHz U-NII-2A
  - 5.470 to 5.725GHz U-NII-2C
  - 5.725 to 5.850GHz U-NII-3/ISM
  - 5.850 to 5.895GHz U-NII-4
  - 5.925 to 6.425GHz U-NII-5
  - 6.425 to 6.525GHz U-NII-6
  - 6.525 to 6.875GHz U-NII-7
  - 6.875 to 7.125GHz U-NII-8

**Notes:** When configured for concurrent operation in 5GHz and 6GHz (only), the U-NII-5 band will be disabled.

- Available bands and channels: Dependent on configured regulatory domain (country)
- Dynamic frequency selection (DFS) optimizes the use of available RF spectrum in the 5GHz band
- Supported radio technologies: 802.11b: Direct-sequence spread-spectrum (DSSS)
  - 802.11a/g/n/ac: Orthogonal frequency-division multiplexing (OFDM)
  - 802.11ax: Orthogonal frequency-division multiple access (OFDMA) with up to 8 resource units
- Supported modulation types:
  - 802.11b: BPSK, QPSK, CCK
  - 802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM and 256-QAM (proprietary extension)
  - 802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM and 1024-QAM (proprietary extension)
  - 802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM and 1024-QAM
- 802.11n high-throughput (HT) support: HT20/40
- 802.11ac very high throughput (VHT) support: VHT20/40/80
- 802.11ax high efficiency (HE) support: HE20/40/80/160
- Supported data rates (Mbps):
  - 802.11b: 1, 2, 5.5, 11
  - 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54
  - 802.11n: 6.5 to 300 (MCS0 to MCS15, HT20 to HT40), 400 with 256-QAM (proprietary extension)
  - 802.11ac: 6.5 to 867 (MCS0 to MCS9, NSS = 1 to 2, VHT20 to VHT80); 1,083 with 1024-QAM (MCS10 and MCS11, proprietary extension)
  - 802.11ax (2.4GHz): 3.6 to 574 (MCS0 to MCS11, NSS = 1 to 2, HE20 to HE40)
  - 802.11ax (5GHz): 3.6 to 1,201 (MCS0 to MCS11, NSS = 1 to 2, HE20 to HE80)
  - 802.11ax (6GHz): 3.6 to 2,402 (MCS0 to MCS11, NSS = 1 to 2, HE20 to HE160)
- 802.11n/ac packet aggregation: A-MPDU, A-MSDU
- Transmit power: Configurable in increments of 0.5 dBm
- Maximum (aggregate, conducted total) transmit power (limited by local regulatory requirements):
- Per radio/band (2.4GHz / 5GHz / 6GHz): +21 dBm (18dBm per chain)

**Notes:** Conducted transmit power levels exclude antenna gain. For total (EIRP) transmit power, add antenna gain.

## Technical Specifications

- Advanced Cellular Coexistence (ACC) minimizes the impact of interference from cellular networks
- Maximum ratio combining (MRC) for improved receiver performance
- Cyclic delay/shift diversity (CDD/CSD) for improved downlink RF performance
- Space-time block coding (STBC) for increased range and improved reception
- Low-density parity check (LDPC) for high-efficiency error correction and increased throughput
- Transmit beam-forming (TxBF) for increased signal reliability and range
- 802.11ax Target Wait Time (TWT) to support low-power client devices
- 802.11mc Fine Timing Measurement (FTM) for precision distance ranging

---

## Wi-Fi Antennas

- AP-615: Integrated downtilt omni-directional antennas for 2x2 MIMO with peak antenna gain of 2.8dBi in 2.4GHz, 4.5dBi in 5GHz and 4.5dBi in 6GHz. Built-in antennas are optimized for horizontal ceiling mounted orientation of the access points. The downtilt angle for maximum gain is roughly 30 to 40 degrees.
  - Combining the patterns of each of the antennas of the MIMO radios, the peak gain of the combined, average pattern is 2.0dBi in 2.4GHz, 3.5dBi in 5GHz and 3.4dBi in 6GHz.

---

## Other Interfaces and Features

- E0: Ethernet wired network ports (RJ-45)
  - Auto-sensing link speed (100/1000/2500BASE-T) and MDI/MDX
  - 2.5Gbps speed complies with NBase-T and 802.3bz specifications
  - POE-PD: 48Vdc (nominal) 802.3af/at POE (class 3 or higher)
  - 802.3az Energy Efficient Ethernet (EEE)
- DC power interface: 12Vdc (nominal, +/- 5%), accepts 2.1mm/5.5mm center-positive circular plug with 9.5mm length
- USB 2.0 host interface (Type A connector)
  - Capable of sourcing up to 1A / 5W to an attached device
- Bluetooth Low Energy (BLE5.0) and Zigbee (802.15.4) radio
  - BLE: up to 5dBm transmit power (class 1) and -100dBm receive sensitivity (125kbps)
  - Zigbee: up to 5dBm transmit power and -97dBm receive sensitivity (250kbps)
  - Integrated omnidirectional antenna with roughly 30 to 40 degrees downtilt and peak gain of 2.6dBi
- GNSS L1 (1575.42MHz) receiver supporting GPS, Galileo, GLONASS and BeiDou signals
  - Receive sensitivity: -162dBm (tracking)
  - Integrated omnidirectional antenna with roughly 30 to 40 degrees downtilt and peak gain of 2.3dBi
- Built-in Trusted Platform Module (TPM) for enhanced device assurance
- Visual indicators (four multi-color LEDs): for System (1x) and Radio (3x) status
- Reset button: factory reset, LED mode control (normal/off)
- Serial console interface (proprietary, micro-B USB physical jack)
- Kensington security slot
- Automatic thermal shutdown and recovery function

---

## Power Sources and Power Consumption

- The AP supports direct DC power and Power over Ethernet (POE) on port E0
- When both DC and POE power sources are available, DC power takes priority over POE
- Power sources are sold separately; see the 610 Series Ordering Guide for details
- When powered by DC or 802.3at (class 4) POE, the AP will operate without restrictions.
- When powered by 802.3af (class 3) POE with the IPM feature disabled, the AP will disable the USB port.
- With IPM enabled, the AP will start up in unrestricted mode but may dynamically apply restrictions depending on the available power budget and actual consumption. The feature restrictions and order in which these get applied are configurable.
- Maximum (worst-case) power consumption (without / with a USB device attached):
  - DC powered: 12.5W/18.2W.
  - POE powered: 14.7W/20.9W.

## Technical Specifications

- This assumes that up to 5W is supplied to the attached USB device.
- Maximum (worst-case) power consumption in idle mode: 5.6W/11.0W (DC) or 6.9W/12.9W (POE).
- Maximum (worst-case) power consumption in deep-sleep mode: 1.0W (DC) or 1.8W (POE).

POE Source	Class 4 (802.3at)	Class 3 (802.3af)
Power budget	25.5W	13.9W
Power mode	Unrestricted	Restricted
USB port	Enabled	Disabled
Ethernet	Enabled	Enabled
MIMO	2x2	2x2
Max RF power reduction	0dB	0dB

POE operating modes and default restrictions with IPM disabled

### Mounting Details

A mounting bracket has been pre-installed on the back of the AP. This bracket is used to secure the AP to any of the mount kits (sold separately); see the 610 Series Ordering Guide for details.

### Mechanical Specifications

- Dimensions/weight (AP-615; unit without mount bracket):
  - 160mm (W) x 160mm (D) x 39mm (H)
  - 520g
- Dimensions/weight (AP-615; shipping):
  - 212mm (W) x 194mm (D) x 66mm (H)
  - 800g

### Environmental Specifications

- Operating conditions
  - Temperature: 0C to +50C / +32F to +122F
  - Relative humidity: 5% to 95%
  - ETS 300 019 class 3.2 environments
  - AP is plenum rated for use in air-handling spaces
- Storage conditions
  - Temperature: -25C to +55C / +13F to +131F
  - Relative humidity: 10% to 100%
  - ETS 300 019 class 1.2 environments
- Transportation conditions
  - Temperature: -40C to +70C / -40F to +158F
  - Relative humidity: up to 95%
  - ETS 300 019 class 2.3 environments

### Reliability

Mean Time Between Failure (MTBF): 540khrs (62yrs) at +25C operating temperature.



## Technical Specifications

### Regulatory Compliance

- FCC/ISED
- CE Marked
- RED Directive 2014/53/EU
- EMC Directive 2014/30/EU
- Low Voltage Directive 2014/35/EU
- UL/IEC/EN 60950
- EN 60601-1-1, EN60601-1-2

For more country-specific regulatory information and approvals, please see your HPE Aruba Networking representative.

---

### Regulatory Model Numbers

- AP-615 (all models): APIN0615
- 

### Certifications

- UL2043 plenum rating
  - Wi-Fi Alliance (WFA):
    - Wi-Fi CERTIFIED a, b, g, n, ac
    - Wi-Fi CERTIFIED 6E (ax, 6GHz)
    - WPA, WPA2 and WPA3 – Enterprise with CNSA option, Personal (SAE), Enhanced Open (OWE)
    - WMM, WMM-PS, Wi-Fi Vantage, W-Fi Agile Multiband
    - Wi-Fi CERTIFIED Location™
  - Bluetooth SIG
  - Ethernet Alliance (POE, PD device, class 4)
- 

### Warranty

HPE Aruba Networking's hardware limited lifetime warranty

---

### Minimum Operating System Software Versions

- HPE Aruba Networking Wireless Operating System and HPE Aruba Networking InstantOS 8.11.0.0
  - HPE Aruba Networking Wireless Operating System 10.5.0.0
- 



## Technical Specifications


RF Performance Table		
Band, Rate	Maximum Transmit Power (dBm) per Transmit Chain	Receiver Sensitivity (dBm) per Receive Chain
<b>2.4GHz, 802.11b</b>		
1Mbps	18.0	-95.0
11Mbps	18.0	-87.0
<b>2.4GHz, 802.11g</b>		
6Mbps	18.0	-93.0
54Mbps	18.0	-75.0
<b>2.4GHz, 802.11n HT20</b>		
MCS0	18.0	-93.0
MCS7	16.0	-74.0
<b>2.4GHz, 802.11ax HE20</b>		
MCS0	18.0	-93.0
MCS11	13.0	-62.0
<b>5GHz, 802.11a</b>		
6Mbps	18.0	-93.0
54Mbps	16.0	-75.0
<b>5GHz, 802.11n HT20 / HT40</b>		
MCS0	18.0 / 18.0	-92.0 / -89.0
MCS7	16.0 / 16.0	-73.0 / -70.0
<b>5GHz, 802.11ac VHT20 / VHT40 / VHT80</b>		
MCS0	18.0 / 18.0 / 18.0	-92.0 / -89.0 / -86.0
MCS9	15.0 / 15.0 / 15.0	-67.0 / -64.0 / -61.0
<b>5GHz, 802.11ax HE20 / HE40 / HE80</b>		
MCS0	18.0 / 18.0 / 18.0	-91.0 / -89.0 / -86.0
MCS11	13.0 / 13.0 / 13.0	-62.0 / -59.0 / -56.0
<b>6GHz, 802.11ax HE20 / HE40 / HE80 / HE160</b>		
MCS0	18.0 / 18.0 / 18.0 / 18.0	-91.0 / -88.0 / -85.0 / -82.0
MCS11	13.0 / 13.0 / 13.0 / 13.0	-62.0 / -59.0 / -56.0 / -53.0



## Technical Specifications


### Antenna Patterns AP-615 Horizontal Planes (Top View)

Showing azimuth (0 degrees) and 30 degrees downtilt patterns (averaged patterns for all applicable antennas)

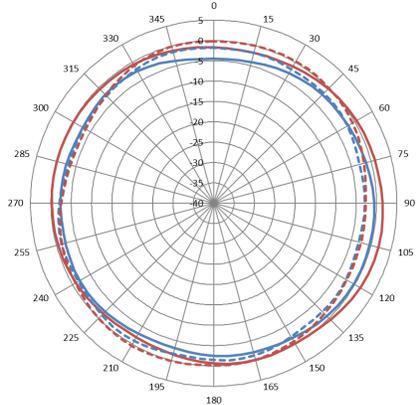


- 2.45 GHz Wi-Fi (R1) Average Azimuth (2.4 + 5)
- 2.45 GHz Wi-Fi (R1) Average Downtilt (2.4 + 5)
- - 2.45 GHz Wi-Fi (R1) Average Azimuth (2.4 + 6)
- - 2.45 GHz Wi-Fi (R1) Average Downtilt (2.4 + 6)

#### 2.45 GHz Wi-Fi antenna patterns (horizontal) for both 2.4 GHz + 5 GHz mode and 2.4 GHz + 6 GHz mode

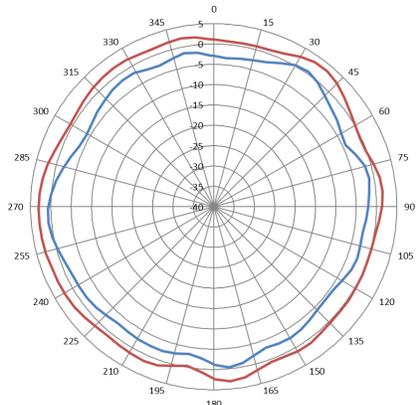

- 5.5 GHz Wi-Fi (R0) Average Azimuth
- 5.5 GHz Wi-Fi (R0) Average Downtilt

#### 5.5 GHz Wi-Fi antenna patterns (horizontal)

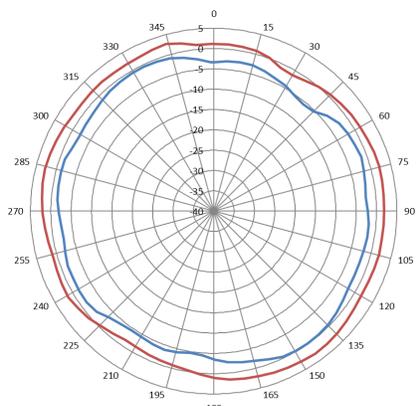

- 6.5 GHz Wi-Fi (R2) Average Azimuth
- 6.5 GHz Wi-Fi (R2) Average Downtilt


#### 6.5 GHz Wi-Fi antenna patterns (horizontal)



## Technical Specifications


### Vertical (elevation) planes (side view, AP facing down)

Showing side view with AP rotated 0 and 90 degrees (averaged patterns for all applicable antennas)

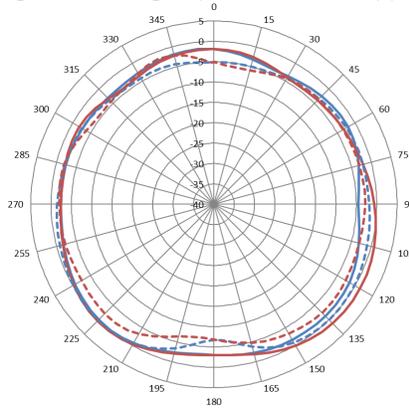


— 2.45 GHz Wi-Fi (R1) Average Elevation 0 (2.4 + 5)    — 2.45 GHz Wi-Fi (R1) Average Elevation 90 (2.4 + 5)  
- - - 2.45 GHz Wi-Fi (R1) Average Elevation 0 (2.4 + 6)    - - - 2.45 GHz Wi-Fi (R1) Average Elevation 90 (2.4 + 6)

### 2.45GHz Wi-Fi antennas patterns (vertical) for both 2.4 GHz + 5 GHz mode and 2.4 GHz + 6 GHz mode

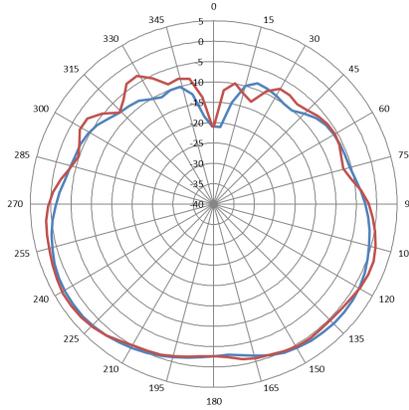

— 5.5 GHz Wi-Fi (R0) Average Elevation 0    — 5.5 GHz Wi-Fi (R0) Average Elevation 90

### 5.5GHz Wi-Fi antenna patterns (vertical)

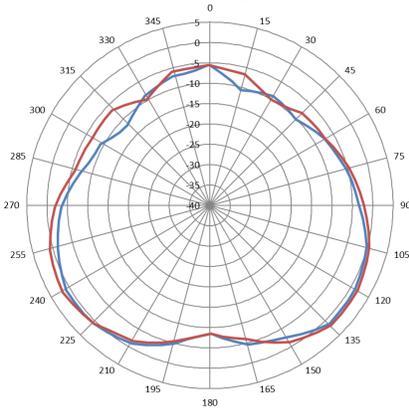

— 6.5 GHz Wi-Fi (R2) Average Elevation 0    — 6.5 GHz Wi-Fi (R2) Average Elevation 90

### 6.5GHz Wi-Fi antennas patterns (vertical)





## Summary of Changes

<b>Date</b>	<b>Version History</b>	<b>Action</b>	<b>Description of Change</b>
08-Sep-2025	<b><u>Version 9</u></b>	Changed	Other Interfaces and Features topic in Technical Specifications section was updated.
28-Jul-2025	<b><u>Version 8</u></b>	Changed	Update survey link.
07-Apr-2025	<b><u>Version 7</u></b>	Changed	Overview, Standard Features, Configuration Information, and Technical Specifications sections were updated.
16-Dec-2024	<b><u>Version 6</u></b>	Changed	Overview, Standard Features and Configuration Information sections were updated.
01-Jul-2024	<b><u>Version 5</u></b>	Changed	Configuration Information section was updated.
01-Apr-2024	<b><u>Version 4</u></b>	Changed	Configuration Information section was updated.
04-Dec-2023	<b><u>Version 3</u></b>	Changed	Series name was updated.
01-May-2023	<b><u>Version 2</u></b>	Changed	Configuration Information section was updated, new SKU was added.
06-Sep-2022	<b><u>Version 1</u></b>	New	New QuickSpecs



## Copyright

Make the right purchase decision.  
Contact our presales specialists.

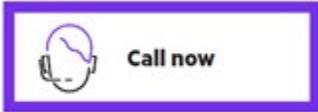

**Shape the Future of QuickSpecs – Your Input Matters**



© Copyright 2025 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

To learn more, visit: <http://www.hpe.com/networking>

a50004285enw - 16889 - Worldwide - V9 - 08-September-2025