

ViewSonic®



PROJECTOR

PA503S


Key Features

Extended Lifespan | Automatic
Sleep Timer | Auto Power Off |
Bright Images in Any Environment |
Amazing Colour Accuracy



Product Description

The ViewSonic PA503S offers impressive visual performance in small business meeting rooms and classrooms. With higher brightness and longer lamp life, PA503S projector is guaranteed to reproduce the finest of details in any environment for much longer. ViewSonic exclusive SuperColour™ technology offers a wider range of displayable colour ensuring true-to-life colour accuracy in both bright and dark environments without sacrificing image quality.

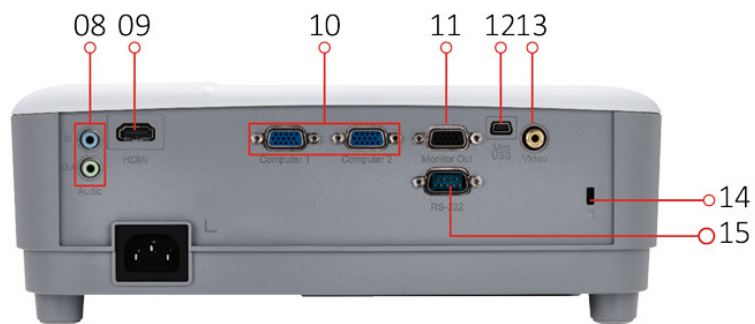

- | | | |
|--------------------|---------------------------|-----------|
| 1. Keypad | 8. Audio in/out | 15. RS232 |
| 2. LED indicator | 9. HDMI | |
| 3. Lamp cover | 10. Dual VGA | |
| 4. Security lock | 11. VGA out | |
| 5. Zoom/Focus | 12. Mini USB | |
| 6. Front IR | 13. Video | |
| 7. Projection Lens | 14. Kensington® Lock Slot | |

Visit Us www.viewsonic.com

SPECIFICATION

Projection system:	0.55" SVGA
Native Resolution:	800x600
DC type:	DC3
Brightness:	3600lm
Contrast Ratio with SuperEco mode:	22000:1
Display Colour:	1.07 Billion Colours
Light Source:	Lamp
Light source life (Nor/SuperEco):	5000/15000
Lamp Watt:	190W
Lens:	F=2.56-2.68, f=22-24.1 mm
Projection Offset:	120%+/-5%
Throw Ratio:	1.96~2.15
Image size:	30" - 300"
Throw Distance:	1.19m-13.11m(100" @3.98m)
Keystone:	±40° (Vertical)
Optical Zoom:	1.1x
Audible Noise (Eco):	29dB
Resolution Support:	VGA(640 x 480) to FullHD(1920 x 1080)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K~102KHz
Vertical Scan Rate:	23~120Hz

INPUT

Computer in (share with component):	2
Composite:	1
Audio-in (3.5mm):	1
HDMI:	1 (Back)

OUTPUT

Monitor out:	1
Audio out (3.5mm):	1
Speaker:	2W

CONTROL

RS232:	1
USB type mini B (Services):	1

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz AC
Power Consumption:	Normal: 260W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	2.2kg
Dimensions (WxDxH) w/adjustment foot:	294x218x110mm
Language:	English, France, Spanish, Thai, Korea, Germany, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnam

STANDARD ACCESSORY

Power Cord:	1
VGA cable:	1
Remote Control:	1
QSG & CD:	1
Air Filter:	RSPL