


Unit: mm
*Dimension

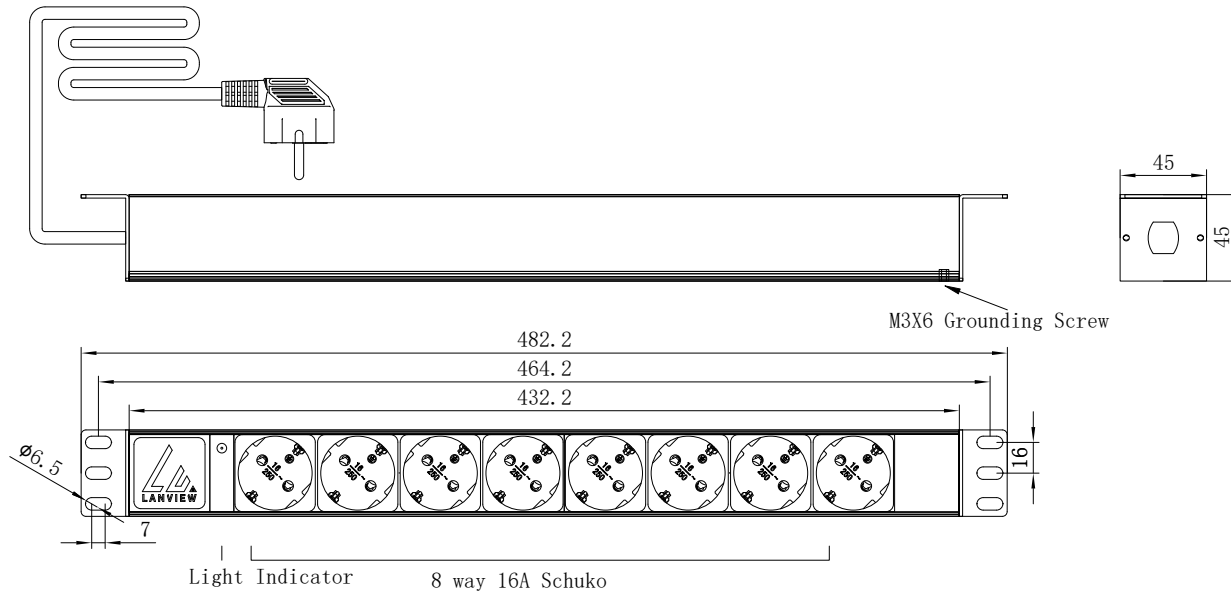

Technical Requirement

| NO. | Items | Description | | | | | |
|-----|------------------|--|----------------|----------------|----------|-----------|-------|
| 1 | Electrical | Rated Voltage: | 250V AC | Rated Current: | 16A | Max Power | 4000W |
| 2 | Frame | Height | 1U | Material | Aluminum | Color | Blank |
| 3 | Installation | Horizontal | | | | | |
| 4 | Socket/Number | 8 way 16A Schuko | | | | | |
| 5 | Indication | Light Indicator | | | | | |
| 6 | Monitoring | | | | | | |
| 7 | Cable Spec | 3G1.5mm2 3M+Schuko 16A Molding plug(VDE) | | | | | |
| 8 | Fixed Mode | A4 Cable Buckle | | | | | |
| 9 | Inter Connection | Grounding cable 1.5mm2 | | | | | |
| 10 | Others | LOGO | WB-370 | | | | |

... Note:

Module

Logo Plate+Light Indicator+8 way 16A Schuko+Blank+1/10 Blank

| | |
|---------------|-------------------------|
| Product Name | Power Distribution Unit |
| Customer No. | - |
| Model No. | PDU08-1U-G8 |
| Drawing No. | 20230922-04 |
| Tolerance: ±2 | Scale: |