

Paxton Exit - E38, E50, E75

System specifications

Cable Length	5m/16ft (Screw connector - None)
Cable type for extensions	Belden 9540
Maximum Cable extension length	100m/328ft 150m/500ft - USA
Additional coloured covers available	Yes
Handsfree compatible	No

Electrical

Operating Voltage	10V - 14V DC
Current consumption	70mA

Environment

Operating temperature	-20°C - +55°C -4°F - +131°F
Moisture resistance	No
Vandal Resistance	Medium




Exit buttons may be used with Compact, Switch2 or Net2 systems. They are supplied with a choice of black or white covers. The E series exit buttons are available in three sizes and are only suitable for interior use.


The E75 exit button fits on a standard UK recessed backbox.

The green LED is lit continuously. When the exit button is pressed, the green LED flashes to indicate that the door is unlocked (only when used with Switch2 and Net2).


E38

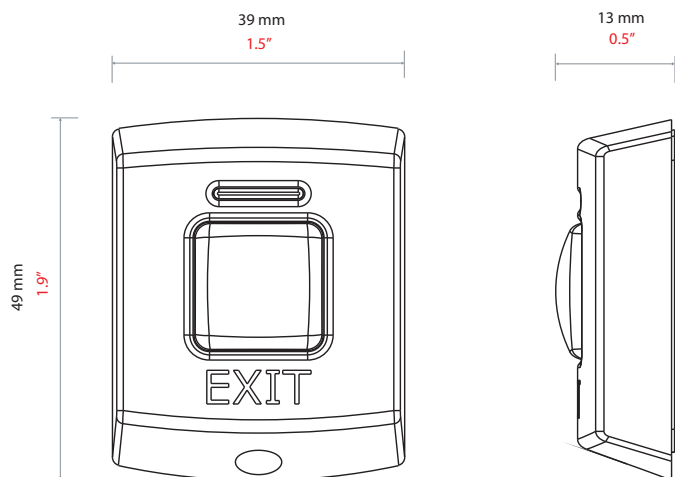


E50

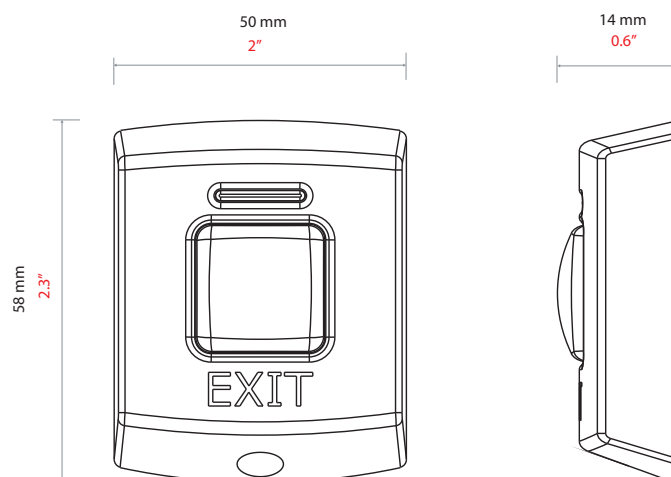

E75

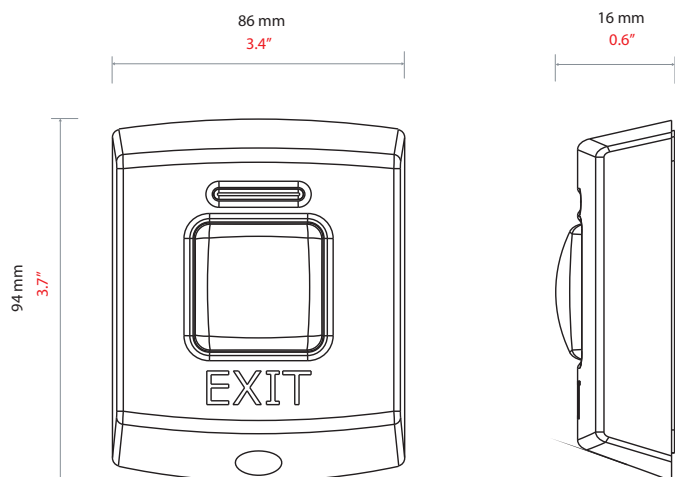

E75sc

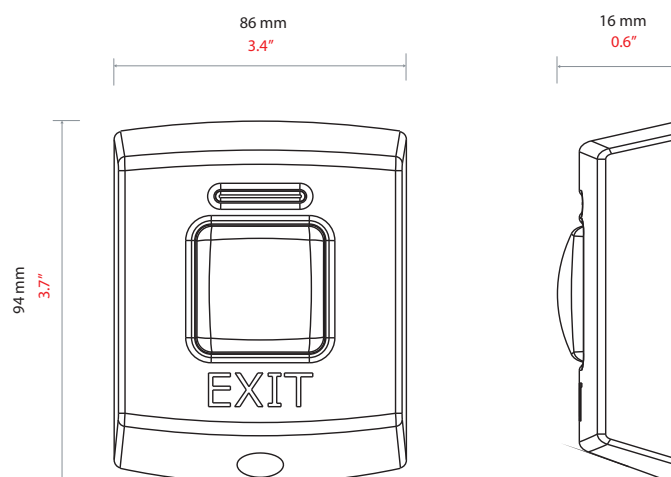

Accessories and sales codes

Paxton Exit button - E38 336-310

Paxton Exit button - E75 376-310

Paxton Exit button - E50 356-310

Paxton Exit button - E75, Screw connector 376-320