



StarTech.com Adaptador Tarjeta PCI Express PCI-E 4 Puertos USB 3.0 (5Gbps) UASP Bus Doble con Alimentación Molex SATA

Marca : StarTech.com

Código del producto: PEXUSB3S42V

Nombre del producto : Adaptador Tarjeta PCI Express PCI-E 4 Puertos USB 3.0 (5Gbps) UASP Bus Doble con Alimentación Molex SATA



- Proporciona cuatro puertos externos USB 3.2 Gen 1 en dos canales de bus independientes
- Soporte para hasta 10 Gbps en total de ancho de banda para transferencias: hasta 5 Gbps por cada dos puertos
- Soporte para UASP en los cuatro puertos
- Interfaz PCIe x4 compatible con las especificaciones para PCI Express 2.0
- Conector de alimentación LP4 o SATA opcional que ofrece hasta 900 mA por puerto USB
- Soporte para especificación 1.2 de carga de batería USB (Modo Apple solamente)
- Totalmente compatible con las especificaciones para USB 3.2 Gen 1 rev 1.0 e Intel xHCI rev 1.0
- Retrocompatible con dispositivos USB 2.0 y USB 1.0/1.1
- Incluye un soporte de instalación de perfil bajo/altura media
- Intercambio en caliente para conectar/desconectar dispositivos sin apagar el sistema

StarTech Adaptador Tarjeta Controladora PCI Express PCI-E 4 Puertos USB 3.0 (5Gbps) UASP Bus Doble con Alimentación Molex SATA - Hub Interno (PEXUSB3S42V)

Puertos e Interfaces		Requisitos del sistema	
Interfaz de host *	PCIe	Sistema operativo Windows soportado	Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 Pro, Windows 10 Pro x64, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64
Interfaz de salida *	USB 3.2 Gen 1 (3.1 Gen 1)		
Factor de forma de la tarjeta de expansión	Full-height / Low-profile		
Estándar de la tarjeta de expansión	PCIe 2.0		
Cantidad de puertos tipo A USB 3.2 Gen 1 (3.1 Gen 1)	4		
Conectores de poder (4 pin) periferales (Molex)	1		
Diseño		Sistema operativo Linux soportado	✓
Interno *	✓		
Longitud máxima del cable	3 m		
Hot-swap	✓		
Certificación	CE, FCC	Sistema operativo de servidor soportado	Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2
Características			
Circuito integrado	2 x Renesas / NEC - μPD720202		
Tasa de transferencia de datos (max)	5 Gbit/s	Sistema operativo de servidor soportado	Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2
apoyo UASP	✓		
Condiciones ambientales			
Intervalo de temperatura operativa	0 - 50 °C	Detalles técnicos	RoHS
Intervalo de temperatura de almacenaje	-20 - 60 °C		
Intervalo de humedad relativa para funcionamiento	5 - 85%		
Peso y dimensiones		Ancho	15 mm
		Profundidad	167 mm
		Altura	120 mm
		Peso	90 g

Empaquetado	
Controladores incluidos	✓
Manual de usuario	✓
Manual de usuario	✓
Ancho del paquete	142 mm
Profundidad del paquete	207 mm
Altura del paquete	41 mm
Peso del paquete	200 g
Datos logísticos	
Código de Sistema de Armomización (SA)	84733020
Cantidad por caja	40 pieza(s)
Ancho de la caja principal	375 mm
Longitud de la caja	440 mm
Alto de la caja principal	315 mm




0065030854597



065030854597



4058829151911

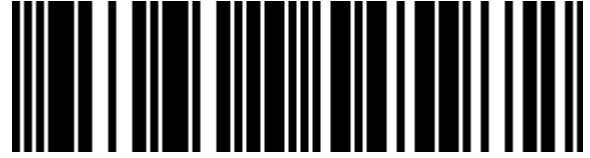

0650308545972



650308545972

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.